VΔPORTITE	Cat.#		(HUBBELL)	HUBBELL
VRGGAMAGG	Job	Туре		Outdoor Lighting
			Approvals	
INCANDESCENT				

#### **APPLICATIONS**

 Wall/Ceiling/Pendant entry, corridor, tunnel, service area, stairwell, or retro-accent

## **SPECIFICATIONS**

- 150 watt maximum medium base incandescent.
- · Platinum silver protective finish
- WWGG has cast aluminum wall bracket with cast wiring box.
  Box has external lugs and four side 1/2" hubs for surface conduit and one rear 1/2" access hub
- VBGG has cast aluminum wiring box with external lugs for ceiling mount and four 1/2" hubs for surface conduit.
   Wiring box has top 1/2" hub for pendant mount
- All units have water/bug tight gasketing
- · All units have medium base porcelain socket
- All units include clear glass protective globe with thread-on cast aluminum guard. Guard includes vandal-resistant set screw


### **LISTINGS**

· All units listed to UL1598 for use in wet locations



# **150 WATT**

Lugs: 5" center to center

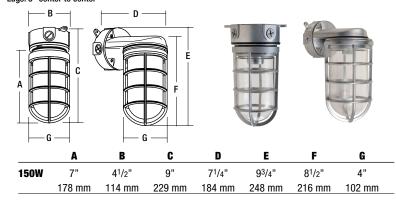

## ORDERING INFORMATION

Catalog Number	Wattage	Mounting	Weight Ibs. (kg)
VBGG-150	150	Box/pendant	3 (1.36)
VWGG-150	150	Wall	3.5 (1.59)

### REPLACEMENT GLOBES

Catalog Number	Description
VAMG-100	Amber
VBG-100	Blue
VBGP-100	Blue, tempered
VCGP-100	Clear, tempered
VCGPT-100	Clear, tempered w/ Tuffskin® coating
VG-15	Clear, standard, 150w
VG-30	Clear, standard, 3000w
VGG-100	Blue Green
VGGP-100	Blue Green, tempered
VPG-100	Purple
VRG-100	Ruby
VRGP-100	Ruby, tempered
VRGP-100	Ruby
VRSG-100	Green
VCGP-200	Clear, Tempered
VAMG-200	Amber
VGG-200	Blue Green
VGGP-200	Blue Green, tempered
VBG-200	Blue
VRG-200	Ruby

Due to our continued efforts to improve our products, product specifications are subject to change without notice.

