

RU RECESSED UPLIGHT

Cat.#		Approvals
Job	Type	



APPLICATIONS


- For accent lighting of building facades, columns, ground mount signs, and landscape trees. Recessed units provide low profile for “hidden” light source and easier landscape maintenance such as mowing, weed eating, etc.

SPECIFICATIONS

- Non-metallic housing and lens frame. Bronze finish
- Tempered, impact-resistant glass lens
- Stainless steel hardware
- Pulse Start Metal Halide systems complete with clear, medium base lamp
- 100 watt or 70 watt systems with Quad-Tap® ballastry (120, 208, 240, 277 volt)
- Accessory guards and wall wash/shield reflector available

LISTINGS

- UL 1598 listed for ground mount/burial locations

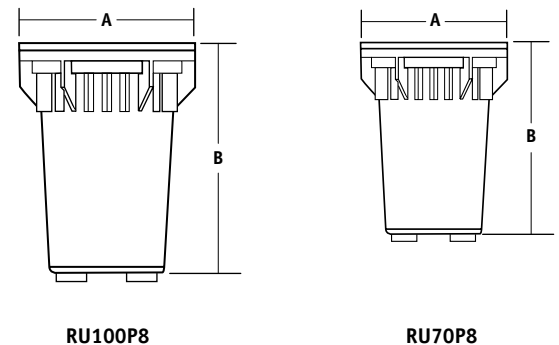

	A	B
100P	12.2" 310 mm	14.0" 357 mm
70P	9.6" 244 mm	13.0" 330 mm



ORDERING INFORMATION

Catalog Number	Wattage	Voltage	Lamp Included	Weight lbs. (kg)
PULSE START METAL HALIDE				
RU100P8	100W	120/208/240/277	Yes	14.5 (6.5)
RU70P8	70W	120/208/240/277	Yes	10 (4.5)

ACCESSORIES

Catalog Number	Description
RU100G	100 watt guard
RU70G	70 watt guard
RU100WW	100 watt wall wash shield reflector
RU70WW	70 watt wall wash shield reflector



RU100G



RU70G