


NRG®1100 FULL CUTOFF COMPACT WALLPACK	Cat.#		 HUBBELL Outdoor Lighting
	Job	Type	

APPLICATIONS

- Use for wall perimeter or entry at mounting heights of 8-15 feet

SPECIFICATIONS

- Hubbell Outdoor Lighting's newest NRG® family to be introduced late in the second quarter 2007 is packed with owner benefits
The StarView compliant optics allow no up light, saving energy and keeping the neighbors happy
- The decorative styling is also rugged with one piece polycarbonate front, painted bronze or white on the inside, that resists rocks and other small projectiles
- The die cast housing provides rigid mounting, conduit and photocontrol hubs, easy mount design and heat dissipation


LISTINGS

- Listed to UL1598 for use in wet locations

PRODUCT IMAGE(S)



DIMENSIONS

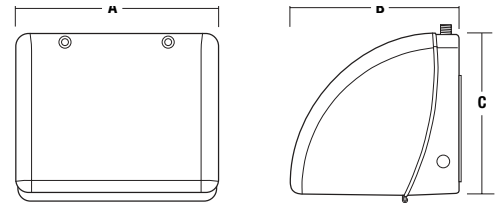

A	B	C
11 ³ / ₄ "	9 ¹ / ₂ "	9 ¹ / ₂ "
298 mm	241 mm	241 mm

CERTIFICATIONS/LISTINGS



ORDERING INFORMATION

Catalog Number ¹	Wattage/Voltage	Finish	Weight lbs. (kg)
Pulse Start Metal Halide			
NRG-1111-W	100w 120, 277, 347V	white	12 (5.4)
NRG-1171-B	70w 120, 277, 347V	bronze	11 (5.0)
NRG-1171-W	70w 120, 277, 347V	white	11 (5.0)
High Pressure Sodium			
NRG-1112-W	100w 120, 277, 347V	white	10 (4.5)
NRG-1172-W	70w 120, 277, 347V	white	9 (4.1)
Electronic Fluorescent			
NRG-1143-W	42w 120-277V, 60/50hz	white	7 (3)

¹ All fixtures include medium base or compact fluorescent lamps. CFL units use universal socket and are capable of operating 26 or 32w PLT lamps if substituted in the field; CFL lamps are 3500K, GX24q-4 base

ACCESSORIES - Order Separately

Catalog Number	Description
PBT-1	Photocontrol, button type, 120V
PBT-234	Photocontrol, button type, 277V

REPLACEMENT PARTS

Catalog Number	Description
NRG1100FHB	Polycarbonate front housing-bronze, 70w max.
NRG1100FWH	Polycarbonate front housing-white, 70w max.
NRG1111FWH	Polycarbonate front housing-white, 100w max.