


WGC SERIES	Cat.#		 HUBBELL Outdoor Lighting
	Job	Type	
			Approvals

SPECIFICATIONS

Intended Use:

- Full cutoff perimeter lighting

Construction:

- Rugged cast aluminum housing and door provide rigid mounting to surface
- Full cutoff distribution with factory-installed shield (Shield can be removed in the field if more forward throw is desirable)
- Tempered stippled glass lens increases distribution spread and softens lamp image
- Compact unit for 8-12' mounting heights
- Dark bronze powder paint finish protects surfaces and appearance

Optics/Electrical

- Pulse Start, HPS, or fluorescent (mid-size only) sources available, lamp included
- CFL versions include 42w 3500K 4-Pin lamps

Installation:

- Universal mounting adapter and gasket provided for attachment to recessed wiring boxes or flat surfaces
- 1/2" side hubs allow conduit entry

Listings:

Listed to UL1598 for use in wet locations.

Warranty:


Limited warranty (for more information visit: <http://www.hubbelloutdoor.com/resources/warranty/>)

PRODUCT IMAGE(S)



Compact Unit with Shield Removed in Field

DIMENSIONS

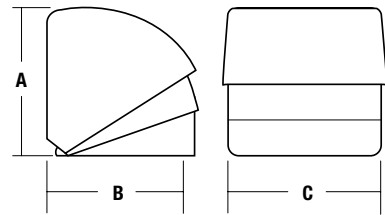

	A	B	C
COMPACT	8 ¹³ / ₁₆ "	8 ⁷ / ₃₂ "	8 ³ / ₄ "
	224 mm	208 mm	222 mm

CERTIFICATIONS/LISTINGS



ORDERING INFORMATION

Catalog Number	Wattage/Source	Voltage	Finish	Weight lbs. (kg)
COMPACT SERIES – MEDIUM BASE¹				
WGC-50H	50w/PS	120, 277V	Bronze	10 (4.5)
WGC-70H	70w/PS	120, 208, 240, 277V	Bronze	11 (5.0)
WGC-100S	100w/HPS	120, 208, 240, 277V	Bronze	12 (5.4)

¹ Lamp included on all units.

ACCESSORIES - ORDER SEPARATELY

Catalog Number	Description
PBT-1	Button Photo control, 120V
PBT-234	Button Photo control, 277V

PHOTOMETRIC REPORTS

Catalog Number	IES Report
WGC100H	HP10060.IES
WGC100S	HP10059.IES