

WM SERIES

COMPACT
WALL SCONCE

Cat. #		Approvals
Job	Type	



APPLICATIONS


- Accent wall sconces for mounting heights on 8-12 ft

SPECIFICATIONS

- Shipped as full cutoff downlight
 - Units have an internal shield that when removed allows up/down distribution
- UV stabilized polycarbonate front is decorative yet rugged
- Die cast housing provides rigid mounting and dissipates ballast/lamp heat
- Silicone gasket seals out moisture and insects
- Fluorescent units feature 120V photocontrol for dusk to dawn energy saving control
- 70 watt pulse start units have Tri-Tap® ballast (120, 277, 347V) and are shipped less photocontrol. PBT-1 or PBT-234 may be field installed if photocontrol is desired
- All units include lamp(s)

LISTINGS

- Listed to UL1598 for use in wet locations

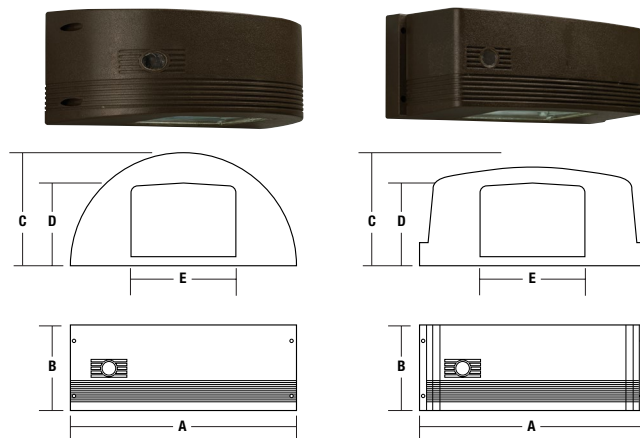

	A	B	C	D	E
WMR	14 ⁵ / ₈ " 370 mm	5 ¹ / ₂ " 140 mm	7 ⁵ / ₁₆ " 185 mm	4 ¹³ / ₁₆ " 121 mm	6 ¹¹ / ₁₆ " 170 mm
WMS	14 ⁵ / ₈ " 370 mm	5 ¹ / ₂ " 140 mm	6 ⁵ / ₁₆ " 160 mm	4 ¹³ / ₁₆ " 121 mm	6 ¹¹ / ₁₆ " 170 mm

ORDERING INFORMATION

Catalog Number ¹	Shape	Wattage	Voltage	Photocontrol	Weight lbs. (kg)
WMR-42F1-PC	Radius	42 CFL	120	Yes	6.0 (2.7)
WMR-70P6	Radius	70 PSMH	120, 277, 347	No	11.0 (5.0)
WMS-213F1-PC	Soft rectangle	2X13 CFL	120	Yes	6.5 (2.9)
WMS-42F1-PC	Soft rectangle	42 CFL	120	Yes	6.0 (2.7)
WMS-70P6	Soft rectangle	70 PSMH	120, 277, 347	No	11.0 (5.0)

¹ All units have molded-in dark bronze finish and include lamps;
CFL 2 x 13w lamps are PLC, 42w lamp is PLT; Lamps are 3500K

Due to our continued efforts to improve our products, product specifications are subject to change without notice.



Outdoor Lighting

Hubbell Outdoor Lighting • 701 Millennium Boulevard • Greenville, SC 29607 • PHONE: 864-678-1000

For more information visit our web site: www.hubbelloutdoor.com