



PARADOX 4

4" Marker Light LED (Line Voltage)

HIGHLIGHTS

- Integral junction box for wire splicing
- Available with In-line dimming
- U.V. stabilized, impact and corrosion resistant housing
- Integral driver

5
YEAR
warranty




IP67



Specifications

Length:	5"
	127 mm
Width:	3.9"
	99 mm
Height:	8"
	203 mm

DIMENSIONS

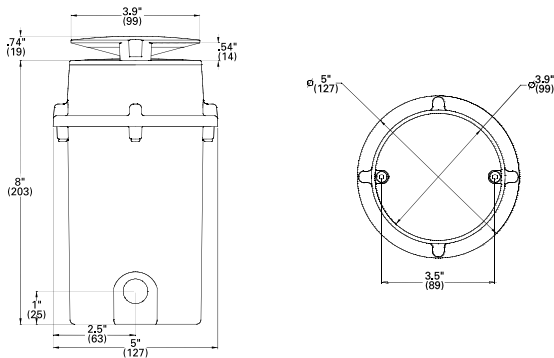

ORDERING INFORMATION

EXAMPLE: PDX4ML B 9LED WHT53K MVOLT ML360 FLC 12S LPI

Series		Material		LED Array		LED Color		Voltage		Light Distribution	
PDX4ML		SS B	Lamp By Others Bronze	9LED	WHT53K	Cool White	120 ^{1,3} MVOLT ²		ML180	180°	
					WHT41K	Neutral White			ML360	360°	
					WHT30K	Warm White					
					AMB	Amber					
					BLU	Blue					
					GRN	Green					
					RED	Red					
Lens		Conduit Entries			Options		Lamp		Listing		
FLC	Flat Lens Clear	12S ³	Two 1/2" NPT Side (Standard)			IDIM	In-line Dimming 120 Volt Only	LPI	LED Array Included	IEC ⁴	International Electrotechnical Commission
		12B ³	Two 1/2" NPT Bottom								
		20S ⁴	Two M20X 1,5 Side (Standard)								
		20B ⁴	Two M20X 1,5 Bottom								

Notes:

- 120 Volt power supply is magnetic and dimmable using standard incandescent dimming controls
- MVOLT = 120-277 electronic power supply, non-dimmable
- Only for use in 60HZ applications
- Only for use in 50HZ applications

SPECIFICATIONS AND FEATURES

DOOR MATERIAL: Die cast bronze or stainless steel.

HOUSING: Die cast bronze and injection molded thermoplastic. The housing is U.V. stabilized, impact and corrosion resistant for use in all types of environments

LAMP TYPE: LED: Monochromatic LED, 9W

VOLTAGE: MVOLT (120-277) or 120 for dimming.

LIGHT DISTRIBUTION: See ordering guide.

LENS/SEAL: Tempered clear flat borosilicate glass. The patent pending door / lens seal uses proprietary knife edge technology to secure the assembly to the housing. Two captive screws hold the assembly in place. The lens is notched to provide maximum aperture opening.

CONDUIT ENTRIES: Two 1/2" NPT side entries standard, two 1/2" bottom entries are optional.

POWER MODULE: Integrally mounted modular LED driver, prewired for easy installation and maintenance.

FINISH: Natural bronze or stainless steel with a brushed finish.

LISTING: U.L., C.U.L.

WARRANTY: 5-year limited warranty. Complete warranty terms located at: www.acuitybrands.com/support/customer-support/terms-and-conditions

NOTE: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.