

Juno®

Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

4" IC 600 LUMEN WARMDIM® LED DOWNLIGHT REMODEL

IC1RLWDG4N RECESSED HOUSING



LENSED TRIMS

PRODUCT DESCRIPTION

Dedicated LED, Air-Loc® remodel housing with patented WarmDim® technology • LED color temperature warms while dimming to emulate the dimming performance of traditional incandescent light sources • Shallow housing allows for fit in 2 x 6 construction • IC remodel housing for remodel application where back side of ceiling is not accessible • Installs through an opening in the ceiling from below • Secured in place by factory installed remodel springs • Can be completely covered with insulation • LED housing is designed to provide 50,000 hours of life and is compatible with many standard Juno trims • 5 year limited warranty on LED components.

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT

- No harmful ultraviolet or infrared wavelengths
- No lead or mercury, RoHS compliant
- Comparable light output to 65W incandescent while consuming 12W

PRODUCT SPECIFICATIONS

LED Light Engine Proprietary patented micro processor controlled light engine emulates dimming performance of incandescent light source

- Replaceable light engine attached to high purity aluminum, thermally conductive housing provides superior heat transfer to ensure long life of the LEDs
- 3000K color temperature at full lumen output • 90 CRI minimum throughout dimming range • Design covered under Patent US 8,710,754.

Optical System Computer-optimized reflector design with high reflectance finish coupled with a high transmission diffusing lens conceals the LEDs and produces uniform aperture luminance.

Aesthetic Trim Selections Compatible with wide selection of existing Juno trims • Shadow free, knife edge design blends seamlessly into ceiling • Trims are wet location approved for covered ceiling applications.

LED Driver Dedicated 120 volt driver • Power factor > 0.9 • Dimmable with the use of most incandescent, magnetic low voltage and electronic low voltage wall box dimmers • For a list of compatible dimmers, see [JUNOICLED-DIM](#) • Mounted inside housing for easy access from below ceiling.

Life Rated for 50,000 hours at 70% lumen maintenance.

Labels UL listed for U.S. and Canada, wet locations (covered ceilings) • Union made • UL and cUL.

Testing All reports are based on published industry procedures; field performance may differ from laboratory performance.

Product specifications subject to change without notice.



HOUSING FEATURES

Housing Designed for use in IC (insulated ceiling) or non-IC construction • Aluminum housing sealed for Air-Loc® compliance • Remodel springs accommodate up to 1 1/2" ceiling thickness.

Junction Box Pre-wired junction box provided with (5) 1/2" knockouts, (4) knockouts for 12/2 or 14/2 NM cable and ground wire • Knockouts equipped with pryout slots • Quick connect electrical connectors supplied as standard for fast, secure installation.



DIMENSIONS

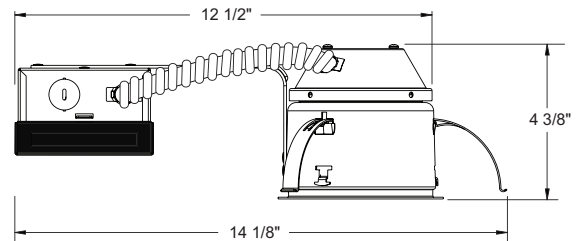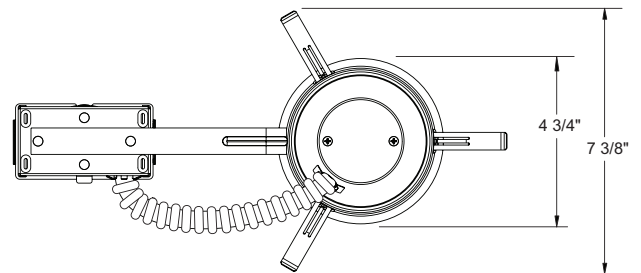


4 3/8" CEILING CUTOUT

ELECTRICAL DATA

Dedicated 120V Only Driver

120V	
Input Power	12W (+/- 5%)
Input Current	0.1A
Frequency	50/60 Hz
EMI/RFI	FCC Title 47 CFR, Part 15 Class B (residential)
Minimum starting temp	-20°C

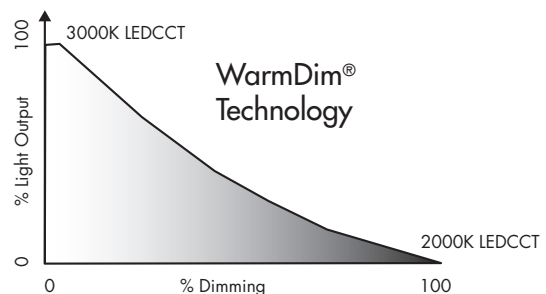

4" IC 600 LUMEN WARMDIM® LED DOWNLIGHT REMODEL





IC1RLWDG4N RECESSED HOUSING
LENSED TRIMS

ORDERING INFORMATION: Housing and trim each ordered separately.

Example: **IC1RLWDG4N-3K-1**

Housing	Color Temperature	Input Voltage
IC1RLWDG4N	3K 3000K	1 Dedicated 120V Only (Forward Phase + ELV dimmable)

Example: **12W-WH**

Trim/Description		
	11-WH	Drop Opal
	12W-WH 12W-SC 12W-ABZ	Shower Trim, frosted perimeter lens
	4101-ABZ 4101-SC 4101-WH	Beveled Dome - Shower
	4102-ABZ 4102-SC 4102-WH	Beveled Shower

UL Listed for use in wet location.

Trim Size: 5" O.D.

Trim Finish: ABZ - Classic Aged Bronze, SC - Satin Chrome, WH - White

Note: In Canada when insulation is present, Type IC fixtures must be used.


PHOTOMETRIC REPORT

Test Report #: PT09141904

Catalog No: IC1RLWDG4N-3K
with 12W-WH Trim

Luminaire Spacing Criterion: 0.76

Luminaire LPW: 54



CANDLEPOWER DISTRIBUTION (Candelas)

Degrees Vertical	0°
0	739
5	728
15	587
25	343
35	170
45	89
55	50
65	29
75	13
85	1
90	0

AVERAGE INITIAL FOOTCANDLES

Multiple Units (Square Array, 60'x60' room)

Ceiling 80% Wall 50% Floor 20%

Spacing	RCR1	RCR3	RCR5
4.0'	45	37	32
5.0'	29	24	20
6.0'	20	17	14
7.0'	16	13	11
8.0'	13	11	9
9.0'	10	8	7
10.0'	7	6	5

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixture
0-30°	387	N/A	59.1
0-40°	496	N/A	75.6
0-60°	611	N/A	93.2
0-90°	655	N/A	100.0

INITIAL FOOTCANDLES

(One Unit, 12.1W, 47.8° Beam)

Distance to Illuminated Plane (Feet)	Footcandles Beam Center	Beam Diameter
4	46.2	3.5'
6	20.5	5.3'
8	11.5	7.1'
10	7.4	8.9'

LUMINANCE (Average cd/m²)

Degrees	Average Luminance
45	20446
55	14306
65	11056
75	8052
85	2242

Fixtures tested to IES recommended standard for solid state lighting per LM-79-08. Photometric performance on a single unit represents a baseline of performance for the fixture. Results may vary in the field.



1300 S. Wolf Road • Des Plaines, IL 60018 • Phone (847) 827-9880 • Fax (847) 827-2925
220 Chrysler Drive • Brampton, Ontario • Canada L6S 6B6 • Phone (905) 792-7335 • Fax (905) 792-0064
Visit us at www.junolightinggroup.com

Printed in U.S.A. ©2015 Juno Lighting, LLC.