



Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

5" SHALLOW UNIVERSAL IC REMODEL HOUSING



INCANDESCENT LAMPS

IC25R

PRODUCT DESCRIPTION

IC Air-Loc® Remodel Housing • Energy efficient, sealed housing
• IC Remodel Housing for remodel application where back side of ceiling is not accessible • Installs through an opening in the ceiling from below • Secured in place by factory installed remodel springs
• Can be completely covered with insulation • When used with Air-Loc Gasket (see accessories), stops infiltration and exfiltration of air, reducing heating and cooling costs • Trims shown with Air-Loc symbol **AIR-LOC** do not require a gasket.

DIMENSIONS

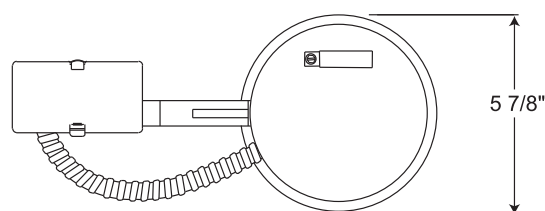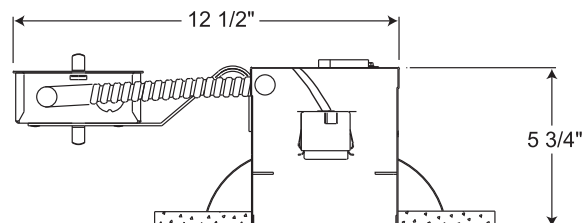

5 1/2" CEILING CUTOUT

PRODUCT SPECIFICATIONS

Lamp Lamp ratings based on trim selected—see reverse.

Socket Medium base porcelain with nickel-plated copper screw shell • Floating socket with spring attaches to trim for installation.

Trims Trim selection shown on reverse.

Labels UL/cUL listed for through branch-wiring, damp locations and IP • Product thermally protected against improper use of lamps • Union made AFL-CIO • UL and cUL Listed • Trim No. 212 is wet location approved for covered ceiling applications • Trims 275 and 276 are wet location approved for covered ceiling applications, **when used with outdoor rated PAR lamps**.

Testing All reports are based on published industry procedures; field performance may differ from laboratory performance.

Product specifications subject to change without notice.

INSTALLATION

Junction Box Pre-wired junction box, UL/cUL Listed for through-branch wiring maximum 4 No. 12 AWG 90° C branch circuit conductors (2 in, 2 out) • Junction box provided with removable access plate, (5) 1/2" knockouts, (4) Non-metallic sheathed cable connectors and ground wire • Knockouts equipped with pryout slots.

Housing IC housing, .032" aluminum sealed for Air-Loc Compliance • Remodel springs accommodate up to 1 1/8" ceiling thickness.

PRODUCT CODES

Catalog Number	Input Voltage	Lamp Rating (max.)
IC25R	120V	R20/PAR20/BR30/PAR30/PAR30L (See reverse for max. trim rating)

ACCESSORIES

Catalog No.	Description
ALG5R	Air-Loc Gasket











To order, specify catalog number.

5" SHALLOW UNIVERSAL IC REMODEL HOUSING

INCANDESCENT LAMPS

IC25R

TRIMS/LAMPS


	Cat. No.	Description	Max. Lamp Rating	
		275B-WH ♦♦ 275W-WH ♦♦	Shallow Baffle - Black Shallow Baffle - White	50W BR30, 50W PAR30, 50W PAR30L
		276B-WH ♦♦ 276C-WH ♦♦ 276HZ-WH ♦♦ 276WHZ-WH ♦♦ 276W-WH ♦♦	Shallow Cone - Black Alzak® Shallow Cone - Clear Alzak® Shallow Cone - Haze Shallow Cone - Wheat Haze Shallow Cone - White	50W BR30, 50W PAR30, 50W PAR30L
		208B-WH 208W-WH	Eyeball with Black Baffle Eyeball with White Baffle	50W PAR20/R20
		529-WH 529-SC 529-ABZ	PAR30 Eyeball	50W PAR30
		209-WH	Gimbal Ring with Flat Trim	35W PAR30
		688B-WH 688W-WH	Gimbal Ring with Black Baffle Gimbal Ring with White Baffle	35W PAR30
		689C-WH 689G-WH	Gimbal Ring in Clear Cone Gimbal Ring in Gold Cone	35W PAR30
		212-WH ♦ 212-SC ♦ 212-ABZ ♦	Frosted Lens with Clear Center	35W PAR30

Trim Size: 6 1/4" O.D. (except Cat No. 529 - 6 1/2" O.D.)

Trim Finish: ABZ - Classic Aged Bronze, SC - Satin Chrome, WH - White.

Alzak is a registered trademark of Alcoa Corp.

Note: In Canada when insulation is present, Type IC fixtures must be used.

 JUNO IC housings meet IECC Energy Code requirements per ASTM E283.
Air-Loc® rated trims are pre-gasketed for minimum air leakage with IC housings.

♦ UL Listed for use in wet location.

♦♦ UL Listed for use in wet location with outdoor rated lamp.