



Description

IC rated Air-Loc®, energy efficient vertical CFL housing with single wall construction • Can be completely covered with insulation • Air-Loc installation stops infiltration and exfiltration of air, reducing heating and cooling costs

Listings

UL Listed, C-UL/CSA certified for through-branch wiring, damp and wet locations • Washington State, IECC and MEC energy codes as tested per ASTM-E283 • Energy Star® qualified, California Title 24 compliant • Wet location listed when used with a 220, 239, 241, 242, 243, 271, 2330, 6101 and 9900 trim


Features

- 6" Housing
- Energy Star® qualified, California Title 24 compliant
- 120V HPF or NPF rapid start electronic FCC Class B ballast with end-of-life lamp protection
- Ballast enclosed in an aluminum heat dissipating box which prevents direct contact with insulation. Ballast mounted between J-box and housing for ease of maintenance
- Removable or fixed mounted socket accommodates a variety of trim installations
- Vertically adjustable to accommodate up to a 1" ceiling thickness
- Real Nail® 3 bar hangers: telescoping system with pre-installed removable nail for easy repositioning of housing in joist construction • Integral T-bar mounting feature for secure installation in suspended ceilings • Patented break-away bars for tight joist spacing • Bar hangers may be re-positioned 90° • Curved foot facilitates alignment with joist bottom • Quick-Loc slot and oversized set screw lock fixture in position
- Fully assembled housing
- Pre-wired junction box with (5) 1/2" and (1) 3/4" knockouts with pryout slots, (4) non-metallic sheathed cable connectors, and ground wire
- UL Listed, C-UL/CSA certified for through-branch wiring, maximum (8) #12 AWG conductors (4 in, 4 out)
- Shadow-free, knife-edge trim design blends smoothly into the ceiling and allows architectural continuity with Aculux® trims
- 2 year warranty
- One 26W triple tube (4-pin) CFL lamp with trim selection on pages 76-77

Ordering Information


Catalog Number: **ICPL626E** - 120V HPF ballast
 Catalog Number: **ICPL626EN** - 120V NPF ballast
 Catalog Number: **ICPL626E-DB120** - ICPL626E with 120V HPF dimmable ballast — T24 and non-Energy Star® compliant
 Catalog Number: **ICPL626EN-DB120** - ICPL626E with 120V normal power factor (NPF) dimmable ballast — T24 and Energy Star® compliant

Dimensions

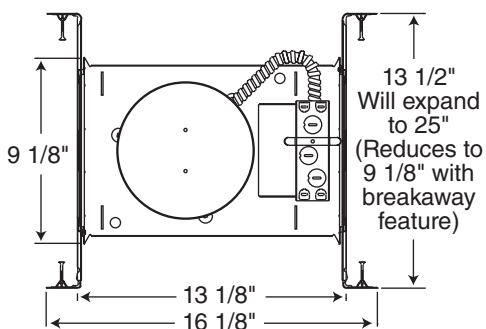

Accessories

Catalog Number	Description
ALG6	Air-Loc® Energy Conserving Gasket for 6" Air-Loc® IC housings

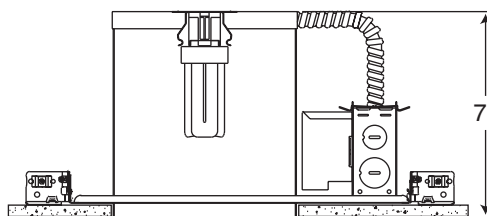

6 7/8" Ceiling Cutout