

ICPL626RE Series 6" 26W Triple Vertical CFL Remodel Housing IC Rated

ENERGY EFFICIENT

Juno

Air-Loc



Features

- 6" Remodel housing
- Energy Star® qualified, California Title 24 compliant
- 120V HPF or NPF rapid start electronic FCC Class B ballast with end-of-life lamp protection
- Ballast mounted to underside of J-box to minimize contact with insulation
- Removable or fixed mounted socket accommodates a variety of trim installations
- Remodel springs accommodate up to 1 1/8" ceiling thickness
- Fully assembled housing
- Pre-wired junction box with (5) 1/2" knockouts with pryout slots, (4) non-metallic sheathed cable connectors, and ground wire
- UL Listed, C-UL/CSA certified
- Shadow-free, knife-edge trim design blends smoothly into the ceiling and allows architectural continuity with Aculux® trims
- 2 year warranty
- One 26W triple tube (4-pin) CFL lamp with trim selection on pages 76-77



Description

IC rated Air-Loc®, energy efficient vertical CFL remodel housing for remodel applications where back side of ceiling is not accessible • Can be completely covered with insulation • Air-Loc® installation stops infiltration and exfiltration of air, reducing heating and cooling costs

Listings

UL Listed, C-UL/CSA certified for damp and wet locations • Washington State, IECC and MEC energy codes as tested per ASTM-E283 • Energy Star® qualified, California Title 24 compliant • Wet location listed when used with a 220, 239, 241, 242, 243, 271, 2330, 6101 and 9900 trim


Ordering Information

Catalog Number: **ICPL626RE** - 120V HPF ballast
 Catalog Number: **ICPL626REN** - 120V NPF ballast
 Catalog Number: **ICPL626REN-DB120** - ICPL626RE with 120V normal power factor (NPF) dimmable ballast — T24 and Energy Star® compliant


Accessories

Catalog Number	Description
ALG6R	Air-Loc® Energy Conserving Gasket Kit for 6" Air-Loc IC Remodel housings

Dimensions

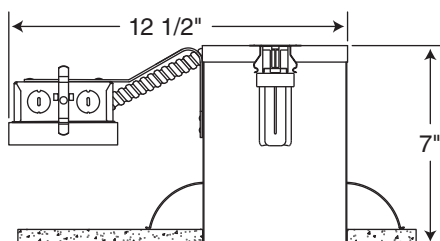

6 3/4" Ceiling Cutout

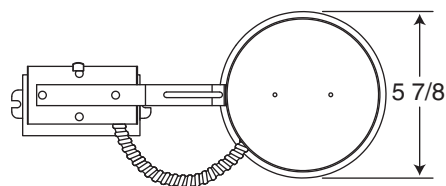

Down-Lites



JUNO LIGHTING GROUP
by Schneider Electric