

Project: \_\_\_\_\_

Fixture Type: \_\_\_\_\_

Location: \_\_\_\_\_

Contact/Phone: \_\_\_\_\_

# 6" VERTICAL IC COMPACT FLUORESCENT HOUSING

26W COMPACT FLUORESCENT LAMP

T24  
2005

ICPL626E

## PRODUCT DESCRIPTION

ICPL Energy Star, Air-Loc® single-wall construction housing • Can be completely covered with insulation • When used with Air-Loc Gasket (see accessories), stops infiltration and exfiltration of air, reducing heating and air cooling costs • Trims shown with Air-Loc symbol do not require a gasket • Easy access ballast • 2 year warranty.

## PRODUCT SPECIFICATIONS

**Lamp** One 26W triple tube (4-pin) CFL lamp.

**Socket** Supplied with spring to accommodate certain trim installations, or can be attached to top of housing for certain trims.

**Ballast** 120V HPF Rapid Start Electronic with end-of-life lamp protection • Optional dimming ballast available (T24 compliant, not Energy Star qualified) • UL listed/CSA certified • Mounted between j-box and housing for ease of maintenance.

**Trims** Trim selection shown on reverse.

**Labels** Energy Star qualified • UL listed for through-branch wiring and damp locations • Union made AFL-CIO • UL and C-UL Listed • Trims 22, 239, 241, 242, 243, 271, 2330, 6101 and 9900 are wet location approved for covered ceiling applications.

**Testing** All reports are based on published industry procedures; field performance may differ from laboratory performance.

Product specifications subject to change without notice.

## INSTALLATION



**Real Nail 3 Bar Hangers** Telescoping, patent-pending Real Nail 3 system permits quick placement of housing anywhere within 24" O.C. joists or suspended ceilings • Integral T-bar notch and clip secures housing in suspended ceiling grid – no accessory clips required • 24" expansion stop allows quick placement of fixture in standard grid spacing • Bars scored in two locations for fast, clean breaking, allowing housing installation in tight applications • Bars captive to mounting frame • Edge-mounted for extra strength • Captive bugle-headed ring shank nail for quick one-step installation and easy removal with claw hammer for fixture relocation • Quick-Loc slot and oversized locking set screw lock fixture in position • Bar hanger foot contoured to align to bottom of construction joist • Alternate mounting holes included.

**Junction Box** Pre-wired junction box provided with (5) ½" and (1) ¾" knockouts, (4) Romex connectors and ground wire, UL and C-UL Listed for through-branch wiring, maximum (8) No. 12 AWG 90° C branch circuit conductors (4 in, 4 out) • Junction box provided with removable access plates • Knockouts equipped with pryout slots.

**Mounting Frame** 22-gauge die-formed galvanized steel mounting frame • Rough-in section (junction box, mounting frame, housing ballast and bar hangers) fully assembled for ease of installation.

**Housing** IC housing, .032" aluminum sealed for Air-Loc • Housing is vertically adjustable to accommodate up to a 1" ceiling thickness.  
REV-1/07

## DIMENSIONS

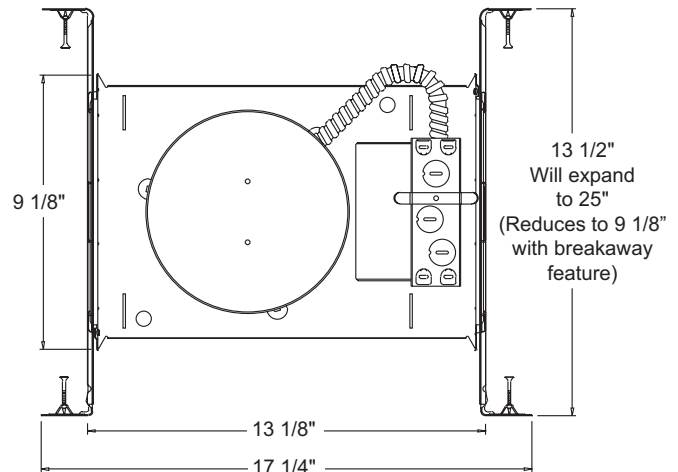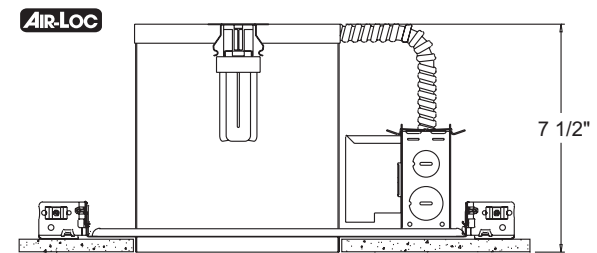

6 7/8" CEILING CUTOUT

## ACCESSORIES

Catalog No.	Description
ALG6	Air-Loc Gasket

To order, specify catalog number.

## PRODUCT CODES

Catalog Number	Input Voltage	Lamp Rating (max.)	Ballast
ICPL626E	120V	26W Triple Tube (4-pin) CFL	HPF

## OPTIONS

(Add as suffix to housing)

Suffix No.	Description
-DB120	120V HPF Dimming Ballast For through-branch wiring, maximum (4) No. 12 AWG 90° C branch circuit conductors (2 in, 2 out)

Note: This product is not Energy Star qualified, but Title 24 compliant.

Ordering Example: ICPL626E-DB120

# 6" VERTICAL IC COMPACT FLUORESCENT HOUSING

## 26W COMPACT FLUORESCENT LAMP

### ICPL626E

#### TRIMS/LAMPS

	Cat. No.	Description	Lamp Rating
 	<b>22-WH</b> ◆	Fresnel	26W Triple Tube (4-pin) CFL
 	<b>241-WH</b> ◆ <b>241-PW</b> ◆	Drop Opal with Reflector Shower/Closet Light	26W Triple Tube (4-pin) CFL
 	<b>242-WH</b> ◆ <b>242-SC</b> ◆ <b>242-ABZ</b> ◆	Shower Trim, Frosted Lens with Clear Center Shower Trim, Frosted Lens with Clear Center Shower Trim, Frosted Lens with Clear Center	26W Triple Tube (4-pin) CFL
 	<b>243-WH</b> ◆	Decorative Swirl Etched Opal Glass	26W Triple Tube (4-pin) CFL
 	<b>239-WH</b> ◆	Frosted Lens with Reflector	26W Triple Tube (4-pin) CFL
 	<b>271-PW</b> ◆	Drop Opal with Reflector	26W Triple Tube (4-pin) CFL
	<b>28W-WH</b>	Conical White Baffle	26W Triple Tube (4-pin) CFL
	<b>28B-WH</b>	Conical Black Baffle	26W Triple Tube (4-pin) CFL
	<b>29C-WH</b>	Deep Cone - Clear	26W Triple Tube (4-pin) CFL
	<b>29W-WH</b>	Deep Cone - White	26W Triple Tube (4-pin) CFL
	<b>232C-WH</b>	Multiplier - Clear Alzak®	26W Triple Tube (4-pin) CFL*
	<b>232G-WH</b>	Multiplier - Gold Alzak®	26W Triple Tube (4-pin) CFL*
	<b>232W-WH</b>	Multiplier - Gloss White	26W Triple Tube (4-pin) CFL*
	<b>232HZ-WH</b>	Multiplier - Haze	26W Triple Tube (4-pin) CFL*
	<b>232WHZ-WH</b>	Multiplier - Wheat Haze	26W Triple Tube (4-pin) CFL*
	<b>2320C-WH</b>	Multiplier in Clear Low Iridescent Alzak®	26W Triple Tube (4-pin) CFL
	<b>2320HZ-WH</b>	Multiplier in Haze	26W Triple Tube (4-pin) CFL
	<b>2320WHZ-ABZ</b>	Multiplier in Wheat Haze	26W Triple Tube (4-pin) CFL
	<b>2320WHZ-WH</b>	Multiplier in Wheat Haze	26W Triple Tube (4-pin) CFL
	<b>233C-WH</b>	Multiplier in Clear Alzak® with Black Baffle, White Trim	26W Triple Tube (4-pin) CFL
	<b>261W-WH</b>	Scoop Wall Wash with White Baffle	26W Triple Tube (4-pin) CFL
	<b>261B-WH</b>	Scoop Wall Wash with Black Baffle	26W Triple Tube (4-pin) CFL
 	<b>2330W-WH</b> ◆	White Baffle Regressed Frosted Dome Lens with Reflector	26W Triple Tube (4-pin) CFL
 	<b>2330B-WH</b> ◆	Black Baffle Regressed Frosted Dome Lens with Reflector	26W Triple Tube (4-pin) CFL
 	<b>6101-ABZ</b> ◆	Beveled Frame - Frosted Dome Lens with Reflector	26W Triple Tube (4-pin) CFL
 	<b>6101-SC</b> ◆	Beveled Frame - Frosted Dome Lens with Reflector	26W Triple Tube (4-pin) CFL
 	<b>6101-WH</b> ◆	Beveled Frame - Frosted Dome Lens with Reflector	26W Triple Tube (4-pin) CFL
 	<b>9900-WH</b> ◆	Fluted Drop Opal Lens	26W Triple Tube (4-pin) CFL*


Trim Size: Catalog Numbers 242, 243, 239, 271, 28, 29, 232, 2320, 233, 261, 9900 - 7<sup>5</sup>/<sub>8</sub>" O.D. Catalog Numbers 22, 241 - 8" O.D. Catalog Number 2330 - 7<sup>3</sup>/<sub>4</sub>" O.D. Catalog Number 6101 - 7<sup>3</sup>/<sub>4</sub>" O.D.

Trim Finish: ABZ - Classic Aged Bronze, PW - Plastic White (Polycarbonate material shower trim), SC - Satin Chrome, WH - White.

Alzak is a registered trademark of Alcoa Corp.

Note: In Canada when insulation is present, Type IC fixtures must be used.

\*Specify General Electric or Osram/Sylvania lamps only.

 JUNO IC housings meet IECC Energy Code requirements per ASTM E283.  
Air-Loc® rated trims are pre-gasketed for minimum air leakage with IC housings.

◆ UL Listed for use in wet location.



1300 S. Wolf Road • P.O. Box 5065 • Des Plaines, IL 60017-5065 • Phone (847) 827-9880 • Fax (847) 827-2925  
220 Chrysler Drive • Brampton, Ontario • Canada L6S 6B6 • Phone (905) 792-7335 • Fax (905) 792-0064  
Visit us at [www.junolightinggroup.com](http://www.junolightinggroup.com)

Printed in U.S.A. ©2006 Juno Lighting, Inc.