



**Description**

IC rated, energy efficient Air-Loc® sealed remodel shallow housing is ideal solution where vertical installation space is limited • Can be completely covered with insulation • Air-Loc installation stops infiltration and exfiltration of air, reducing heating and cooling costs

**Listings**

UL Listed, C-UL/CSA certified for through-branch wiring, damp and wet locations • Wet location listed with the 241 trim • Washington State IECC and MEC energy codes as tested per ASTM-E283 • Conforms with City of Chicago IP requirements

**Features**

- 6" Remodel housing
- 5 3/4" height for use in 2x6 construction
- Floating socket with spring for quick trim attachment and consistent lamp positioning
- Medium base porcelain socket with nickel-plated copper screw shell
- Adjustable height remodel springs accommodate up to a 1 3/4" ceiling thickness
- Housing is fully assembled for ease of installation
- Pre-wired junction box with (5) 1/2" knockouts with pryout slots, (4) non-metallic sheathed cable connectors, and ground wire
- UL Listed, C-UL/CSA certified for through-branch wiring, maximum (4) #12 AWG branch circuit conductors (2 in, 2 out)
- Thermally protected against improper use of lamps
- Shadow-free, knife-edge trim design blends smoothly into the ceiling and allows architectural continuity with Aculux® trims
- Lamp wattage ratings and apertures based on trim selection on page 107



**Ordering Information**

Catalog Number: **IC21R**

**Accessories**

Catalog Number	Description
<b>ALG6R</b>	Air-Loc® Energy Conserving Gasket Kit for 6" Air-Loc® IC Remodel housings

**Dimensions**

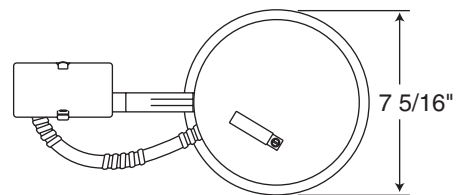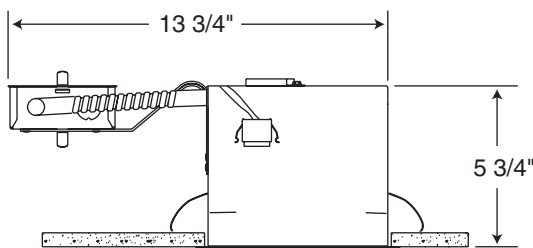

6 3/4" Ceiling Cutout