



# SLOPE CEILING TC REMODEL HOUSING

Project: \_\_\_\_\_

Fixture Type: \_\_\_\_\_

Location: \_\_\_\_\_

Contact/Phone: \_\_\_\_\_

STANDARD SLOPE:

7/12 to 12/12 PITCH (30° to 45°)

INCANDESCENT LAMPS

## TC928R

### PRODUCT DESCRIPTION

Slope ceiling TC Remodel Housing for remodel application where back side of ceiling is not accessible • Installs through an opening in ceiling from below • Secures in place with factory supplied remodel clips • Designed for use in non-insulated areas • If installed where insulation is present, the insulation must be pulled back 3" from TC housing.

### PRODUCT SPECIFICATIONS

**Lamp** Lamp ratings based on trim selected – see reverse.

**Socket** Medium base porcelain with nickel-plated copper screw shell • Adjustable to position lamp perpendicular to floor.



**Trims** Trim selection shown on reverse.

**Labels** U.L. listed for through-branch wiring, damp locations and IP • Product thermally protected against improper use of lamps or insulation • Union made AFL-CIO • UL Listed/CSA certified • Trim No. 603 is wet location approved for covered ceiling applications.

**Testing** All reports are based on published industry procedures; field performance may differ from laboratory performance.

Product specifications subject to change without notice.

### DIMENSIONS

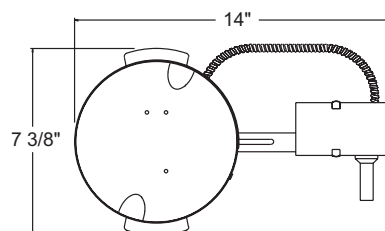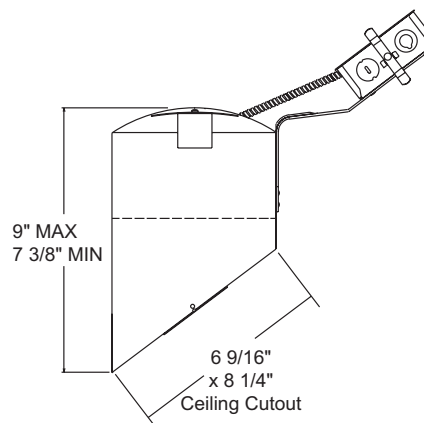

### INSTALLATION

**Junction Box** Pre-wired junction box, UL listed/CSA certified for through-branch wiring maximum 4 No. 12 AWG 90° C branch circuit conductors (2 in, 2 out) • Junction box provided with removable access plate, (4) 1/2" knockouts, (4) Non-metallic sheathed cable connectors and ground wire • Knockouts equipped with pryout slots.

**Housing** TC housing, 22-gauge white painted steel with aluminum cap • Housing is vertically adjustable to accommodate up to a 1" ceiling thickness • Designed to fit 2x8 or 2x10 construction.

### PRODUCT CODES

Catalog Number	Input Voltage	Lamp Rating (max.)
TC928R	120V	PAR16/PAR38

# SLOPE CEILING TC REMODEL HOUSING





STANDARD SLOPE:

7/12 to 12/12 PITCH (30° to 45°)

INCANDESCENT LAMPS

## TC928R

### TRIMS/LAMPS

	Cat. No.	Description	Lamp Rating
	<b>602C-WH</b>	Multiplier Cone - Clear Alzak®	75W PAR30, 150W PAR38, 85W BR30
	<b>602G-WH</b>	Multiplier Cone - Gold Alzak®	
	<b>602B-WH</b>	Multiplier Cone - Black Alzak®	
	<b>602HZ-WH</b>	Multiplier Cone - Haze	
	<b>602HZ-SC</b>	Multiplier Cone - Haze	
	<b>602W-WH</b>	Multiplier Cone - White	
	<b>602WHZ-WH</b> <b>602WHZ-ABZ</b>	Multiplier Cone - Wheat Haze Multiplier Cone - Wheat Haze	
	<b>603B-WH</b> ◆	Super Slope Shower Trim with Black Baffle	75W A19, 75W PAR30
	<b>603W-WH</b> ◆	Super Slope Shower Trim with White Baffle	
	<b>604B-WH</b>	Downlight with Black Baffle	150W PAR38
	<b>604B-SC</b>	Downlight with Black Baffle	
	<b>604B-ABZ</b>	Downlight with Black Baffle	
	<b>604B-BL</b>	Downlight with Black Baffle	
	<b>604W-WH</b>	Downlight with White Baffle	
	<b>606B-WH</b>	Black Cylinder Spotlight with Black Baffle	60W PAR16
	<b>606W-WH</b>	White Cylinder Spotlight with White Baffle	

Trim Size: Cat. No. 604 - 9<sup>7</sup>/<sub>16</sub>" x 8<sup>3</sup>/<sub>16</sub>" O.D., Cat. No. 606 - 9<sup>1</sup>/<sub>8</sub>" O.D.

Trim Finish: ABZ - Classic Aged Bronze, BL - Black, GP - Graphite,

PW - Plastic White (Polycarbonate material shower trim), SC - Satin Chrome, SL - Silver, WH - White.

◆ UL Listed for use in wet location.