

JUNO®

Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

6" IC 1400 LUMEN LED DOWNLIGHT NEW CONSTRUCTION

IC1422LEDG4 RECESSED HOUSING LENSED TRIMS

PRODUCT DESCRIPTION

Dedicated LED, Air-Loc® sealed new construction housing with integral light engine • Housing allows for fit in 2 x 8 construction • Can be completely covered with insulation • Fully sealed housing stops infiltration and exfiltration of air, reducing heating and air cooling costs without the use of additional gaskets • LED housing is designed to provide 50,000 hours of life and is compatible with many standard Juno trims • 5 year limited warranty on LED components.

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT

- No harmful ultraviolet or infrared wavelengths
- No lead or mercury
- Comparable light output to 120W PAR38, BR40 incandescent or 32W compact fluorescent

PRODUCT SPECIFICATIONS

LED Light Engine LED array integrated to thermally conductive housing provides uninterrupted heat transfer to ensure long life of the LED

- Replaceable light engine mounts directly to housing and incorporates the latest generation, high lumen output LED array • LEDs are binned within a 3-step MacAdam Ellipse exceeding ENERGY STAR® requirements for superior fixture to fixture color uniformity • 2700K, 3000K, 3500K, or 4100K color temperatures available • 90 CRI minimum.

Optical System Computer-optimized reflector design with high reflectance white finish coupled with a high transmission diffusing lens conceals the LEDs and produces uniform aperture luminance • Wide flood distribution shipped as standard with optional optic accessories available and sold separately.

Aesthetic Trim Selections Compatible with wide selection of existing Juno trims • Shadow free, knife edge design blends seamlessly into ceiling.

- Trims are wet location approved for covered ceiling applications.

LED Driver Choice of dedicated 120 volt driver or universal voltage driver that accommodates input voltages from 120-277 volts AC at 50/60Hz

- Power factor > 0.9 at 120V input • 120 volt only driver is dimmable with the use of most incandescent, magnetic low voltage and electronic low voltage wall box dimmers • Universal voltage driver is dimmable with the use of most 0-10V wall box dimmers • For a list of compatible dimmers, see [JUNOICLED-DIM](#)

Life Rated for 50,000 hours at 70% lumen maintenance.

Labels UL listed for U.S. and Canada, through-branch wiring and wet locations (covered ceilings) • Union made • UL and cUL.

Testing All reports are based on published industry procedures; field performance may differ from laboratory performance.

Product specifications subject to change without notice.

HOUSING FEATURES

Housing Designed for use in IC (insulated ceiling) or non-IC construction

- Aluminum housing sealed for Air-Loc® compliance • Housing is vertically adjustable to accommodate up to a 2" ceiling thickness.

Junction Box Pre-wired junction box provided with (6) ½" and (1) ¾" knockouts, (4) knockouts for 12/2 or 14/2 NM cable and ground wire

- UL listed and cUL listed for through-branch wiring, maximum 8 #12 branch circuit conductors • Junction box provided with removable access plates • Knockouts equipped with pryout slots • Quick connect electrical connectors supplied as standard for fast, secure installation.


Mounting Frame 22-gauge die-formed galvanized steel mounting frame

- Rough-in section (junction box, mounting frame, housing and bar hangers) fully assembled for ease of installation.

Real Nail 3 Bar Hangers Patented (US Patent D552,969) Real Nail® 3 bar hangers: telescoping system permits quick placement of housing anywhere within 24" O.C. joists or suspended ceilings • Includes removable nail for repositioning of fixture in wood joist construction • Integral T-bar notch and clip for suspended ceilings.



DIMENSIONS

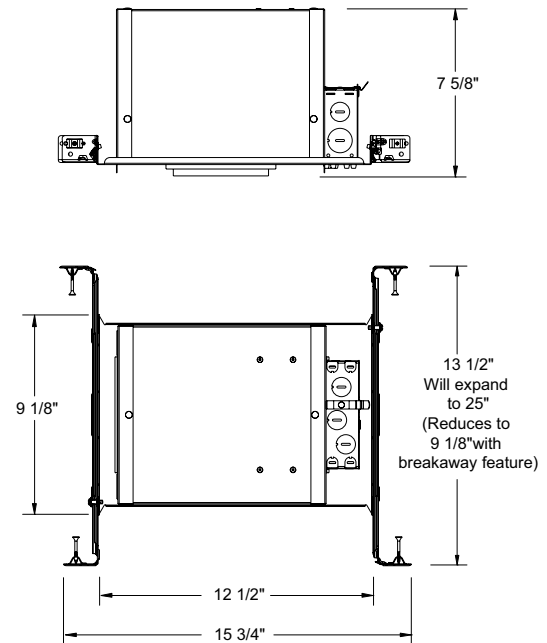

6 7/8" CEILING CUTOUT

ELECTRICAL DATA

Dedicated 120V Only Driver Option

120V	
Input Power	20.3W (+/-5%)
Input Current	0.17A
Frequency	50/60Hz
EML/RFI	FCC Title 47 CFR, Part 15 Class B (residential)
Minimum starting temp	-25°C

ELECTRICAL DATA

Universal Voltage

	120V	277V
Input Power	20.3W (+/-5%)	20.8W (+/-5%)
Input Current	0.17A	0.08A
Frequency	50/60Hz	50/60Hz
EML/RFI	FCC Title 47 CFR, Part 15 Class A (commercial)	FCC Title 47 CFR, Part 15 Class A (commercial)
Minimum starting temp	-40°C	-40°C

6" IC 1400 LUMEN LED DOWNLIGHT NEW CONSTRUCTION

IC1422LEDG4 RECESSED HOUSING LENSED TRIMS

ORDERING INFORMATION: Housing, trim and accessories each ordered separately.

Example: **IC1422LEDG4-3K-1**

Housing	Color Temperature	Input Voltage
IC1422LEDG4	27K 2700K 3K 3000K 35K 3500K 41K 4100K	1 Dedicated 120V Only (Forward Phase + ELV dimmable) U Universal Voltage, 120-277V (0-10V dimmable)

Example: **2330W-WH**

Trim/Description	
20-WH 20-PW	Albalite Shower/Closet Light
21-WH 21-PW	Drop Opal Shower/Closet Light
22-WH	Fresnel
239-WH *	Frosted Lens
242-WH 242-SC 242-ABZ	Shower Trim Frosted Lens with Clear Center
243-WH *	Decorative Swirled Etched Opal Glass
2330W-WH *	White Baffle, Regressed Frosted Dome Lens with Reflector
2330B-WH *	Black Baffle, Regressed Frosted Dome Lens with Reflector
6101-ABZ * 6101-SC * 6101-WH *	Beveled Frame - Frosted Dome Lens with Reflector

UL Listed for use in wet location.
* Do not use reflector shipped with trim for LED housing.
Trim Size: 2330 - 7³/₈" O.D.; 239, 242, 243, 9900 - 7⁵/₈" O.D.; 6101 - 7³/₄" O.D.; 20, 21, 22 - 8" O.D.
Trim Finish: ABZ - Classic Aged Bronze, SC - Satin Chrome, WH - White, PW - Plastic White (Polycarbonate material shower trim).
Note: In Canada when insulation is present, Type IC fixtures must be used.
 JUNO IC housings meet IECC Energy Code requirements per ASTM E283.
Air-Loc® rated trims are pre-gasketed for minimum air leakage with IC housings.


ACCESSORIES

Catalog No.	Description
LEDOPTICG3-M	Medium Flood Optic (50°)
LEDOPTICG3-N	Narrow Flood Optic (37°)
LEDOPTICG3-S	Spot Optic (10°)

To order, specify catalog number.

PHOTOMETRIC REPORT

Test Report #: PT10112101R
Catalog No: IC1422LEDG4-35K
with 239-WH Trim
and standard wide flood optic
Luminaire Spacing Criterion: 1.02
Luminaire LPW: 60



CANDLEPOWER DISTRIBUTION (Candelas)

Degrees	Vertical	0°
0	786	
5	775	
15	713	
25	582	
35	391	
45	230	
55	135	
65	81	
75	44	
85	11	
90	0	

Multiplier: 27K - 0.90
3K - 0.97
41K - 1.04

AVERAGE INITIAL FOOTCANDLES

Multiple Units (Square Array, 60'x60' room)
Ceiling 80% Wall 50% Floor 20%

Spacing	RCR1	RCR3	RCR5
4.0'	82	66	55
5.0'	53	42	35
6.0'	37	29	24
7.0'	30	24	20
8.0'	23	19	16
9.0'	18	14	12
10.0'	13	11	9

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixture
0-30°	539	N/A	43.9
0-40°	784	N/A	63.8
0-60°	1088	N/A	88.5
0-90°	1229	N/A	100.0

INITIAL FOOTCANDLES (One Unit, 20.3W, 70.1° Beam)

Distance to Illuminated Plane (Feet)	Footcandles Beam Center	Beam Diameter
4	49.1	5.6'
6	21.8	8.4'
8	12.3	11.2'
10	7.9	14.0'

LUMINANCE (Average cd/m²)

Degrees	Average Luminance
45	17822
55	12845
65	10552
75	9364
85	6674

Fixtures tested to IES recommended standard for solid state lighting per LM-79-08. Photometric performance on a single unit represents a baseline of performance for the fixture. Results may vary in the field.

