

JUNO®

Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

PRODUCT DESCRIPTION

Dedicated LED new construction housing with integral light engine • Shallow housing allows for fit in 2 x 6 construction • TC housing design for use in non-insulated areas • If installed where insulation is present, the insulation must be pulled back 3" from all sides of the TC housing • LED housing is designed to provide 50,000 hours of life and is compatible with many standard Juno trims • 5 year limited warranty on LED components.

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT

- No harmful ultraviolet or infrared wavelengths
- No lead or mercury
- Comparable light output to 26W compact fluorescent while consuming only 18W*

PRODUCT SPECIFICATIONS

LED Light Engine LED array integrated to one piece high purity aluminum, thermally conductive housing provides uninterrupted heat transfer to ensure long life of the LED • Replaceable light engine mounts directly to housing and incorporates the latest generation, high lumen output LED array • LEDs are binned within a 3-Step MacAdam Ellipse exceeding ENERGY STAR® requirements yielding superior fixture to fixture color uniformity • 2700K, 3000K, 3500K or 4100K color temperatures available • 90 CRI minimum.

Optical System Computer-optimized reflector design with high reflectance white finish coupled with a high transmission diffusing lens conceals the LEDs and produces uniform aperture luminance • Deep regression of lens produces a low glare, efficient system that can produce over 900 lumens with select trims (see page 2 for details) using 18W* • Wide flood distribution shipped as standard with optional optic accessories available and sold separately.

Aesthetic Trim Selections Compatible with wide selection of existing Juno trims • Shadow free, knife edge design blends seamlessly into ceiling.

LED Driver Universal voltage driver that accommodates input voltage from 120-277 volts AC at 50/60Hz is standard and is dimmable with the use of most 0-10V dimmers • Power factor > 0.9 at 120V input • Optional Lutron Hi-Lume® A-Series driver accommodates 120-277 volts AC at 50/60Hz • Mounted between the j-box and housing for easy access and cool operation • For a list of compatible dimmers, see [JUNOTCLEDDIM](#).

Emergency Battery Option Battery factory assembled to housing with remote mounted test switch included • Drives LED array for 90 minutes to meet Life Safety Code (NFPA-LSC), National Electrical Code (NEC) and UL requirements • Provides 50% light output in emergency mode.

Life Rated for 50,000 hours at 70% lumen maintenance.

Labels ENERGY STAR® Qualified when used with select baffle and cone trims • UL listed for U.S. and Canada through-branch wiring, damp locations • Union made • UL and cUL listed.

Testing All reports are based on published industry procedures; field performance may differ from laboratory performance.

Product specifications subject to change without notice.

HOUSING FEATURES

Housing Designed for use in TC applications (non-insulated) • Aluminum housing • Housing is vertically adjustable to accommodate up to a 2" ceiling thickness.

Junction Box Pre-wired junction box provided with (5) 1/2" and (1) 3/4" knockouts and ground wire, UL listed and cUL listed for through-branch wiring, maximum 8 No. 12 AWG 90° C branch circuit conductors (4 in, 4 out) • Junction box provided with removable access plates • Knockouts equipped with pryout slots.

Mounting Frame 16-gauge galvanized steel mounting ring equipped with vertically adjustable mounting brackets that accept 1/2" conduit or "C" channels (HB-26 or HB-50), linear flat bars (LB-27) or Real Nail® 3 bar hangers (HB-1).

*Nominal input wattage @ 120V with standard universal voltage driver under stable operating conditions


6" TC 900 LUMEN LED DOWNLIGHT NEW CONSTRUCTION

TC922LEDG4 RECESSED HOUSING

OPEN TRIMS



DIMENSIONS

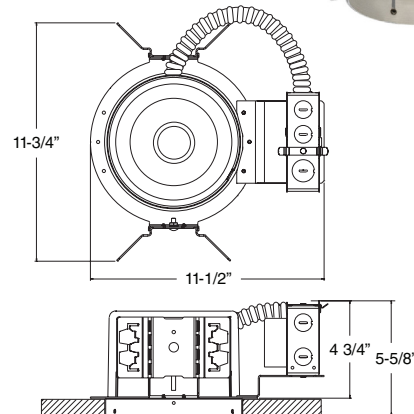

6 7/8" CEILING CUTOUT

ELECTRICAL DATA

STANDARD UNIVERSAL VOLTAGE DRIVER (-U)

	120V	277V
Input Power	18W (+/-5%)	18W (+/-5%)
Input Current - Max	0.15A	0.07A
Frequency	50/60Hz	50/60Hz
EMI/RFI	FCC Title 47 CFR, Part 15, Class A (Commercial)	FCC Title 47 CFR, Part 15, Class A (Commercial)
Minimum starting temp	-40°C (-40°F)	-40°C (-40°F)

UNIVERSAL VOLTAGE DRIVER WITH EMERGENCY OPTION (-UBR)

	120V	277V
Input Power	21.3W (+/-5%)	21.3W (+/-5%)
Input Current - Max	0.33A	0.30A
Frequency	50/60Hz	50/60Hz
EMI/RFI	FCC Title 47 CFR, Part 15, Class A (Commercial)	FCC Title 47 CFR, Part 15, Class A (Commercial)
Minimum starting temp	0°C (32°F)	0°C (32°F)

LUTRON HI-LUME® LED DRIVER (-L)

	120V	277V
Input Power	17.8W (+/-5%)	17.8W (+/-5%)
Input Current - Max	0.15A	0.06A
Frequency	50/60Hz	50/60Hz
EMI/RFI	FCC Title 47 CFR, Part 15, Class A (Commercial)	FCC Title 47 CFR, Part 15, Class A (Commercial)
Minimum starting temp	0°C (32°F)	0°C (32°F)

LUTRON HI-LUME® LED DRIVER WITH EMERGENCY OPTION (-LBR)

	120V	277V
Input Power	21W (+/-5%)	21W (+/-5%)
Input Current - Max	0.33A	0.29A
Frequency	50/60Hz	50/60Hz
EMI/RFI	FCC Title 47 CFR, Part 15, Class A (Commercial)	FCC Title 47 CFR, Part 15, Class A (Commercial)
Minimum starting temp	0°C (32°F)	0°C (32°F)

6" TC 900 LUMEN LED DOWNLIGHT NEW CONSTRUCTION

TC922LEDG4 RECESSED HOUSING OPEN TRIMS

ORDERING INFORMATION: Housing, trim and accessories each ordered separately.

Example: **TC922LEDG4-27K-UBR**

Example: **24W-WH**


















Catalog No.	Color Temp.	Voltage	Options
TC922LEDG4	27K 2700K 3K 3000K 35K 3500K 41K 4100K	U Universal Voltage 120-277V (0-10V dimming) L Lutron Hi-Lume 3-wire Dimming Ecosystem [®] Compatible	BR Emergency Battery Back-up w/ Remote Switch CP Chicago Plenum Chicago Plenum is not available with emergency option

Example: **HB-26**

Accessories

Cat. #	Description	Cat. #	Description
HB-1	Two 13 1/2" - 25" Real Nail [®] 3 bar hangers	LEDOPTICG3-M	Medium Flood Optic (50°)
HB-26	Two 26" C-channel bar hangers	LEDOPTICG3-N	Narrow Flood Optic (37°)
HB-50	Two 50" C-channel bar hangers	LEDOPTICG3-S	Spot Optic (10°)
LB-27	Two 27" linear bar hangers	TR6-ABZ	Trim Ring - Classic Age Bronze
		TR6-BL	Trim Ring - Black
		TR6-SC	Trim Ring - Satin Chrome
		TR6-WH	Trim Ring - White

Notes: ¹ Not ENERGY STAR[®] Qualified.
Trim ring compatible with 24 and 27 trims.


Trim/Description	
	24W-WH Conical White Baffle
	24B-WH¹ Conical Black Baffle
	24B-SC¹ Conical Black Baffle
	24B-ABZ¹ Conical Black Baffle
	24B-BL¹ Conical Black Baffle
	27C-WH Conical Cone in Clear Alzak [®]
	27G-WH Conical Cone in Gold Alzak [®]
	27B-WH¹ Conical Cone in Black Alzak [®]
	27PT-SC Conical Cone in Pewter Alzak [®]
	27W-WH Conical Cone in Gloss White
	27HZ-WH Conical Cone in Haze
	27WHZ-WH Conical Cone in Wheat Haze
	27WHZ-ABZ Conical Cone in Wheat Haze
	9024W-WH White Octagonal w/ White Baffle
	9324-SC Luminous Disc (Frosted)
	9524-SC Chrome Band
	9702 Luminous Collar (Frosted)

Trim Size: 24, 27, 9324, 9524 - 7 5/8" O.D.; 9702 - 7 3/4" O.D.; 9024 - 8" O.D.
Trim Finish: ABZ - Classic Aged Bronze, BL - Black, SC - Satin Chrome, WH - White.
Alzak is a registered trademark of Alcoa Corp.
Note: In Canada when insulation is present, Type IC fixtures must be used.

PHOTOMETRIC REPORT

Test Report #: PT02141401R
Catalog No: TC922LEDG4-35K-U
with 24W-WH Trim and Standard Wide Flood Optic

Luminaire Spacing Criterion: 1.16
Luminaire LPW: 63



CANDLEPOWER DISTRIBUTION (Candelas)

Degrees Vertical	0°
0	701
5	694
15	653
25	583
35	457
45	207
55	91
65	45
75	26
85	6
90	0

Multiplier: 27K - 0.93
3K - 0.99
41K - 1.01

AVERAGE INITIAL FOOTCANDLES

Multiple Units (Square Array, 60'x60' room)
Ceiling 80% Wall 50% Floor 20%

Spacing	RCR1	RCR3	RCR5
4.0'	76	63	52
5.0'	49	40	33
6.0'	34	28	23
7.0'	27	23	19
8.0'	22	18	15
9.0'	17	14	11
10.0'	12	10	8

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixture
0-30°	517	N/A	46.0
0-40°	797	N/A	70.8
0-60°	1046	N/A	92.9
0-90°	1125	N/A	100.0

INITIAL FOOTCANDLES

(One Unit, 17.8W, 78.8° Beam)

Distance to Illuminated Plane (Feet)	Footcandles Beam Center	Beam Diameter
4	43.8	6.6'
6	19.5	9.9'
8	10.9	13.1'
10	7.0	16.4'


LUMINANCE (Average cd/m²)

Degrees	Average 0° Luminance
45	16031
55	8676
65	5788
75	5507
85	3774

PHOTOMETRIC REPORT

Test Report #: LTL25975R
Catalog No: TC922LEDG4-35K-U
with 27C-WH Trim and Standard Wide Flood Optic

Luminaire Spacing Criterion: 0.78
Luminaire LPW: 69



CANDLEPOWER DISTRIBUTION (Candelas)

Degrees Vertical	0°
0	1226
5	1151
15	874
25	685
35	477
45	222
55	74
65	15
75	0
85	0
90	0

Multiplier: 27K - 0.93
3K - 0.99
41K - 1.01

AVERAGE INITIAL FOOTCANDLES

Multiple Units (Square Array, 60'x60' room)
Ceiling 80% Wall 50% Floor 20%

Spacing	RCR1	RCR3	RCR5
4.0'	78	71	61
5.0'	50	45	39
6.0'	35	32	27
7.0'	28	26	22
8.0'	22	20	17
9.0'	17	15	13
10.0'	12	11	10

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixture
0-30°	665	N/A	53.9
0-40°	967	N/A	78.3
0-60°	1218	N/A	98.7
0-90°	1234	N/A	100.0

INITIAL FOOTCANDLES

(One Unit, 17.8W, 58.1° Beam)

Distance to Illuminated Plane (Feet)	Footcandles Beam Center	Beam Diameter
4	76.6	4.4'
6	34.0	6.7'
8	19.2	8.9'
10	12.3	11.1'

LUMINANCE (Average cd/m²)

Degrees	Average 0° Luminance
45	19726
55	7703
65	2135
75	0
85	0

Fixtures tested to IES recommended standard for solid state lighting per LM-79-08. Photometric performance on a single unit represents a baseline of performance for the fixture. Results may vary in the field.



1300 S. Wolf Road • Des Plaines, IL 60018 • Phone (847) 827-9880 • Fax (847) 827-2925
220 Chrysler Drive • Brampton, Ontario • Canada L6S 6B6 • Phone (905) 792-7335 • Fax (905) 792-0064
Visit us at www.junolightinggroup.com