



Features

- LED step light ships complete with LED light engine and driver
- Environmentally friendly, energy efficient
 - No harmful ultraviolet or infrared wavelengths
 - No lead or mercury
- Consumes 6W nominal
- Non-dimming driver accommodates input voltage of 120 volts AC at 50/60HZ
- LED PCB mounted to removable tray for easy access to LED driver and junction box
- Utilizes high output LEDs binned to Energy Star standards
- 3000K and 4100K color temperatures available
- Rated 50,000 hours at 70% lumen maintenance
- Real Nail® 3 bar hangers : telescoping system with pre-installed removable nails for easy repositioning of housing in joist construction • Patented breakaway bars for tight joist spacing • Oversized set screw locks fixture into position
- Integral junction box with (3) 1/2" pryout knockouts and ground wire • UL and cUL Listed for No. 12 AWG daisy chain circuit connectors suitable for 90° C permitted in junction box
- 3 year warranty
- Secure trim retention with torsion springs
- Trim selection shown below



Description

LED step light is rated for use in indoor wall mount or ceiling mount applications • Recessed housing is IC rated and can be completely covered with insulation • Designed to provide 50,000 hours of life and is compatible with standard trims



Listings

UL and cUL Listed for damp locations • Union made AFL-CIO • RoHS compliant


Ordering Information

Catalog Number: **IC113LED-3K** 3000K LED Color Temperature
IC113LED-41K 4100K LED Color Temperature

Dimensions

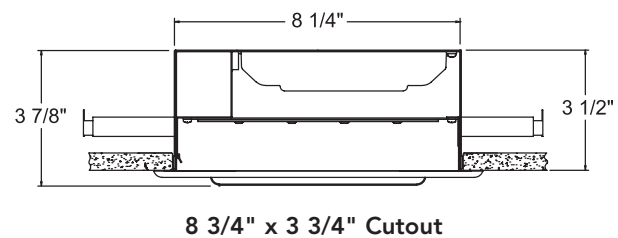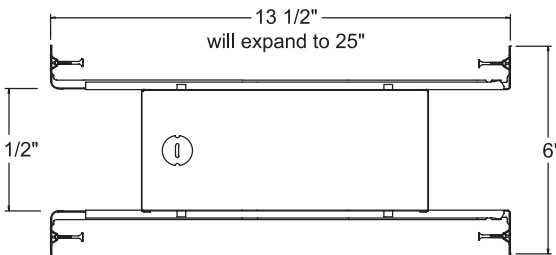

Trims




Catalog #
104-WH

Description
Diffuse Glass Lens, White Trim

Trim Size:
9 9/16" L x 4 7/8" H



Diffuse Lensed Trim



Catalog #
840-WH

Description
Angled Louvers, White Trim

Trim Size
9 9/16" L x 4 7/8" H



Louver Trim

