



Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

IC LED INDOOR STEP/NIGHT LIGHT

LED IC113LED

PRODUCT DESCRIPTION

The LED step light is rated for use in indoor wall or ceiling mount drywall applications • Recessed housing is IC rated and can be completely covered with insulation • Dedicated LED housing ships complete with LED light engine and driver • Designed to provide 50,000 hours of life and is compatible with standard trims • 3 year warranty.

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT

- No harmful ultraviolet or infrared wavelengths
- No lead or mercury
- Comparable light output to compact fluorescent step light



PRODUCT SPECIFICATIONS

LED Light Engine Utilizes 1 watt high lumen output LEDs binned to Energy Star standards • LED PCB mounted to removable aluminum tray for easy access to LED driver and wiring • 3000K or 4100K color temperatures available.

LED Driver Integral, non-dimming driver accommodates input voltage of 120 volts AC at 50/60Hz • Power factor > 0.9 at 120V input • Driver is thermally protected and has integral overload and short circuit protection • Terminal connections provided as standard for easy removal.

Trims Available in white baked powder coat on steel
• Fastens to housing with two torsion springs.

Life Rated for 50,000 hours at 70% lumen maintenance.

Labels UL listed for damp locations • Union made AFL-CIO
• UL and cUL Listed, RoHS compliant.

Testing All reports are based on published industry procedures; field performance may differ from laboratory performance.

Product specifications subject to change without notice.

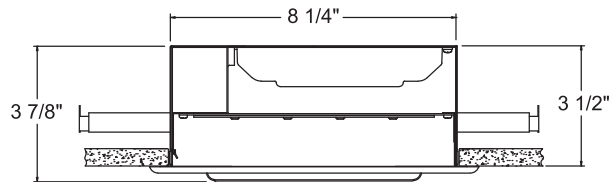
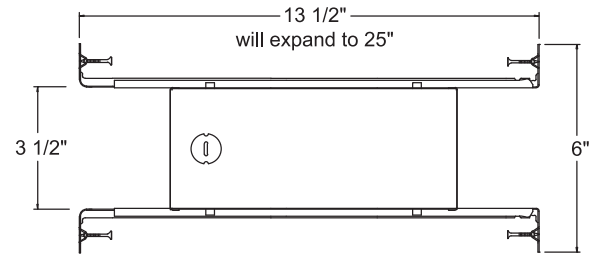
HOUSING FEATURES

Housing IC housing, 22-gauge white painted steel.

Junction Box Pre-wired junction compartment provided with (3) 1/2" knockouts, and ground wire, UL and cUL listed for No. 12 AWG daisy chain circuit connectors suitable for 90° C permitted in junction box • Junction compartment provided with removable access plate • Knockouts equipped with pryout slots.

Real Nail® 3 Bar Hangers Telescoping, patented Real Nail 3® system permits quick placement of housing anywhere within 24" O.C. joists or suspended ceilings • Integral T-bar mounting feature secures housing in suspended ceiling grid – no accessory clips required • 24" expansion stop allows quick placement of fixture in standard grid spacing • Bars scored in two locations for fast, clean breaking, allowing housing installation in tight applications • Bars captive to housing • Edge-mounted for extra strength • Captive bugle-headed ring shank nail for quick one-step installation and easy removal with claw hammer for fixture relocation • Oversized locking set screw lock fixture in position • Alternate mounting holes included.

DIMENSIONS



8 3/4" X 3 3/4" CUTOUT

ELECTRICAL DATA

Input Voltage	120V
Input Power	6.4W
Input Current	0.06A
Frequency	50/60Hz
THD	≤ 10%
Minimum starting temp	-20°C (-4°F)




IC LED INDOOR STEP/NIGHT LIGHT

LED IC113LED

ORDERING INFORMATION: Housing and trim each ordered separately.

Example: **IC113LED-3K**

Example: **840-WH**

Housing	Color Temperature	Trim/Description
<input type="text"/> IC113LED 	<input type="text"/> - <input type="text"/> 3K 3000K 41K 4100K	<input type="text"/>  104-WH Diffuse Glass Lens, White Trim  840-WH Angled Louvers, White Trim Trim Finish: WH - White.