

Features

- Medium base porcelain socket with nickel-plated copper screw shell
- Real Nail® 3 bar hangers: telescoping system with pre-installed removable nail for easy repositioning of housing in joist construction • Patented breakaway bars for tight joist spacing • Bar hangers may be re-positioned 90° • Quick-Loc slot and oversized set screw lock fixture in position
- Housing is fully assembled for ease of installation
- Pre-wired junction box with (3) 1/2" pryout knockouts and ground wire
- UL Listed, C-UL/CSA certified for No. 12 AWG daisy chain circuit connectors suitable for 90°C permitted in junction box
- Thermally protected against improper use of lamps
- Secure trim retention with torsion springs
- Trim options and A19 wattages shown below



Description

IC Rated Step Light/Night Light housing for incandescent lamp • For use indoors in insulated and non-insulated areas



Listings

UL Listed, C-UL/CSA certified for through-branch wiring and damp locations • Conforms with City of Chicago IP requirements

Ordering Information

Catalog Number: **ICTC113**

Dimensions

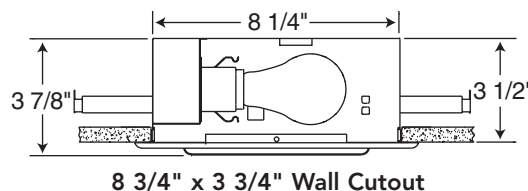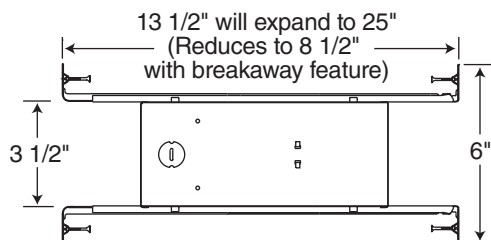

Trims

	Catalog # 104-WH	Description Diffuse Glass Lens, White Trim	Max. Lamp Rating TC: 40W A19 IC: 25W A19 Trim Size: 9 9/16" L x 4 7/8" H	<p>Diffuse Lensed Trim</p>
	Catalog # 840-WH	Description Angled Louvers, White Trim	Max. Lamp Rating TC: 40W A19 IC: 25W A19 Trim Size 9 9/16" L x 4 7/8" H	<p>Louver Trim</p>