



Description

Non IC Step Light housing for compact fluorescent lamp • For use in concrete pour wet locations or non-insulated areas

Listings

UL Listed for wet locations and concrete pour approved • C-UL/CSA certified



Features

- Die cast aluminum housing gasketed for wet location
- Two mounting brackets for nailing housing to studs
- Junction box with (2) 1/2" compression conduit connections and ground wire
- 120V NPF magnetic ballast
- Cast aluminum trims supplied with an opal diffuser
- Trims fasten to housing with two allen-head screws
- One 7W or 9W twin tube CFL lamp mounted horizontally in fixture
- Trim options shown below

Ordering Information

Catalog Number: **PL115**

Dimensions

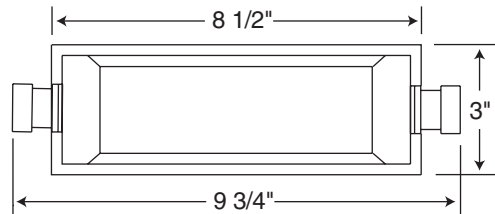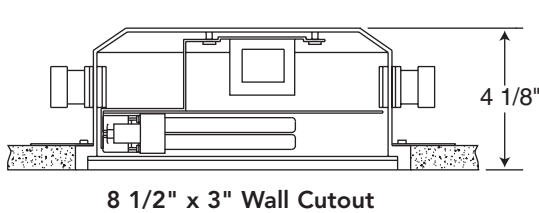

Trims



Opal Lens

Catalog #
835-BL
835-WH


Description
Black
White

Max. Lamp Rating

7W/9W 2-pin CFL

Trim Size:
9 3/4" L x 3 5/8" H

Aperture
7 7/8" x 2 5/16"



Opal Lens with Grill


Catalog #
836-BL
836-WH

Description
Black
White

Max. Lamp Rating

7W/9W 2-pin CFL

Trim Size:
9 3/4" L x 3 5/8" H



Opal Lens with Angled Louvers

Catalog #
837-BL
837-WH

Description
Black
White

Max. Lamp Rating

7W/9W 2-pin CFL

Trim Size:
9 3/4" L x 3 5/8" H

