



TRAC-MASTER®

Avant Garde

TRAPEZIA™

T630-9, T630-16, T635-9, T635-16

Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

PRODUCT DESCRIPTION


Trapezia suspends the MR16 or PAR30 lamp down from the trac with the grace of a trapeze artist. Slender 9-inch or 16-inch long tubes conceal lamp lead wires feeding into an elegantly sculpted die-cast lamp housing. The light airy appearance is great for display, exhibition and gallery lighting and the downward reach can make pendant mounting of trac unnecessary.

Aiming 90° vertical aiming capability and 358° rotation.

Construction Die-cast aluminum upper transition housing and socket housing
 • Hollow metal rods conceal conductors • Rod length is fixed at the factory.

Labels UL listed, CSA certified.

Product specifications subject to change without notice.



Low Voltage MR16 - Trapezia™

Lamp 20-50W MR16 lamps • Must be used with MR16 lamps with integral lens (cover glass) except when combined with 2" accessories.

Socket Ceramic bi-pin.

Construction Die-cast aluminum lamp housing with integral aiming handle
 • Steel tubes conceal lamp lead wires.

Accessories May be used with up to two 2" accessories and/or Barn Doors simultaneously with Accessory Holder.




Transformer **T537** or **T538** 12V solid state electronic transformer with on/off switch or Juno Trac-Master low voltage monopoint. Must be ordered separately. Dimmable, see spec sheet D1.2.1.

Catalog Number	Description	Finish	Lamp
T630-9-WH	9" Rods	White	20-50W MR16CG
T630-9-BL	9" Rods	Black	20-50W MR16CG
T630-9-SL	9" Rods	Silver	20-50W MR16CG
T630-16-WH	16" Rods	White	20-50W MR16CG
T630-16-BL	16" Rods	Black	20-50W MR16CG
T630-16-SL	16" Rods	Silver	20-50W MR16CG


ACCESSORIES

Cat. No.	Description	Cat. No.	Description	Cat. No.	Description
T7400SA, BL	Accessory Holder	T7470BL	Barn Doors	T7478	Linear Spread Lens
T741-6	Color Filters/Lenses	T7477	Prismatic Spread Lens	T7421	Uniformity Lens
T7401-18	Dichroic Lenses	T7420	Diffuse Spread Lens		
T7422	UV Filter Lens	T7459BL	Hexcell Louver		

See specification sheet D1.2.2 for details.

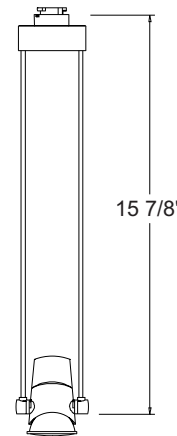

T630-16



T630-9

Line Voltage PAR30 - Trapezia™


Lamp 50-75W PAR30.

Socket Medium base porcelain with nickel plated copper screw shell.


Construction Die-cast aluminum lamp housing with integral aiming handle
 • Steel tubes conceal lamp lead wires.

Adapter Copper alloy contacts provide precise spring action - no arcing and will not take a set • True, positive electrical ground • Spring-loaded positive latch polarity indicator embossed on copper contact • "Pull-up" contact to up position for two-circuit application.

Catalog Number	Description	Finish	Lamp
T635-9-WH	9" Rods	White	50-75W PAR30
T635-9-BL	9" Rods	Black	50-75W PAR30
T635-9-SL	9" Rods	Silver	50-75W PAR30
T635-16-WH	16" Rods	White	50-75W PAR30
T635-16-BL	16" Rods	Black	50-75W PAR30
T635-16-SL	16" Rods	Silver	50-75W PAR30



T635-16



T635-9


TRAC-MASTER®

Avant Garde

TRAPEZIA™

T630-9, T630-16, T635-9, T635-16

CBCP • Centerbeam candlepower
FC • Footcandles at beam center (aim point)

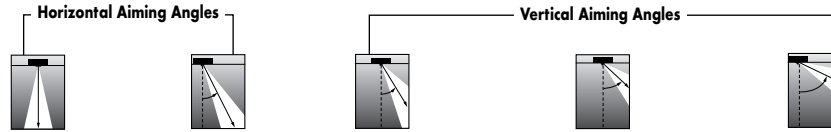

Lamp	Beam Type	Beam Spread°	Rated Life	CBCP	0°		30°			30°			45°				60°									
					MH	FC	L	W	FC	L	W	D	FC	X	L	W	FC	X	L	W	D	FC	X	L	W	
Q35W MR16	SP	20°	5000	3900	4	244	1.4	1.4	158	1.9	1.6	2	122	3.5	3.1	1.4	345	2.0	1.5	1.0	4	158	2.3	1.9	1.6	
					6	108	2.1	2.1	70	2.8	2.4	3	54	5.2	4.7	2.1	153	3.0	2.2	1.5	6	70	3.5	2.8	2.4	
					8	61	2.8	2.8	40	3.8	3.3	4	31	6.9	6.2	2.8	86	4.0	2.9	2.0	8	40	4.6	3.8	3.3	
					10	39	3.5	3.5	25	4.7	4.1	5	20	8.7	7.8	3.5	55	5.0	3.6	2.5	10	25	5.8	4.7	4.1	
					12	27	4.2	4.2	18	5.7	4.9	6	14	10.4	9.3	4.2	38	6.0	4.4	3.0	12	18	6.9	5.7	4.9	
					FL	40°	5000	1000	4	63	2.9	2.9	41	4.1	3.4	2	31	3.5	9.6	2.9	88	2.0	3.4	2.1	4	41
	6	28	4.4	4.4	18				6.1	5.0	3	14	5.2	14.5	4.4	39	3.0	5.0	3.1	6	18	3.5	6.1	5.0		
	8	16	5.8	5.8	10				8.1	6.7	4	8	6.9	19.3	5.8	22	4.0	6.7	4.1	8	10	4.6	8.1	6.7		
	10	10	7.3	7.3	6				10.2	8.4	5	5	8.7	24.1	7.3	14	5.0	8.4	5.1	10	6	5.8	10.2	8.4		
	12	7	8.7	8.7	5				12.2	10.1	6	3	10.4	**	8.7	10	6.0	10.1	6.2	12	5	6.9	12.2	10.1		
	Q50W MR16	NSP	15°	6000	9100				4	638	1.0	1.0	414	1.3	1.1	2	319	3.5	2.1	1.0	902	2.0	1.0	0.7	8	104
						6	283	1.5	1.5	184	2.0	1.7	3	142	5.2	3.1	1.5	401	3.0	1.5	1.0	10	66	5.8	3.3	2.8
8						159	2.0	2.0	104	2.6	2.3	4	80	6.9	4.1	2.0	225	4.0	2.0	1.4	12	46	6.9	3.9	3.4	
10						102	2.5	2.5	66	3.3	2.8	5	51	8.7	5.1	2.5	144	5.0	2.5	1.7	14	34	8.1	4.6	4.0	
12						71	2.9	2.9	46	3.9	3.4	6	35	10.4	6.2	2.9	100	6.0	3.0	2.1	16	26	9.2	5.3	4.5	
NFL						25°	6000	3200	4	213	1.9	1.9	138	2.6	2.2	2	106	3.5	4.6	1.9	301	2.0	2.0	1.4	4	138
6		94	2.9	2.9	61				3.9	3.3	3	47	5.2	7.0	2.9	134	3.0	3.1	2.0	6	61	3.5	3.9	3.3		
8		53	3.8	3.8	35				5.2	4.4	4	27	6.9	9.3	3.8	75	4.0	4.1	2.7	8	35	4.6	5.2	4.4		
10		34	4.8	4.8	22				6.5	5.5	5	17	8.7	11.6	4.8	48	5.0	5.1	3.4	10	22	5.8	6.5	5.5		
12		24	5.8	5.8	15				7.8	6.7	6	12	10.4	13.9	5.8	33	6.0	6.1	4.1	12	15	6.9	7.8	6.7		
FL		40°	6000	1700	4				116	2.9	2.9	75	4.1	3.4	2	58	3.5	9.6	2.9	164	2.0	3.4	2.1	4	75	2.3
6					51	4.4	4.4	33	6.1	5.0	3	26	5.2	14.5	4.4	73	3.0	5.0	3.1	6	33	3.5	6.1	5.0		
8	29				5.8	5.8	19	8.1	6.7	4	14	6.9	19.3	5.8	41	4.0	6.7	4.1	8	19	4.6	8.1	6.7			
10	19				7.3	7.3	12	10.2	8.4	5	9	8.7	24.1	7.3	26	5.0	8.4	5.1	10	12	5.8	10.2	8.4			
12	13				8.7	8.7	8	12.2	10.1	6	6	10.4	**	8.7	18	6.0	10.1	6.2	12	8	6.9	12.2	10.1			

Lamp	Beam Type	Beam Spread°	Rated Life	CBCP	0°		30°			30°			45°				60°								
					MH	FC	L	W	FC	L	W	D	FC	X	L	W	FC	X	L	W	D	FC	X	L	W
75W PAR30 Halogen	SP	10°	2000	13000	6	361	0.9	0.9	235	1.3	1.1	3	181	5.2	1.9	0.9	511	3.0	0.9	0.7	8	132	4.6	1.7	1.5
					8	203	1.3	1.3	132	1.7	1.5	4	102	6.9	2.6	1.3	287	4.0	1.3	0.9	10	84	5.8	2.1	1.8
					10	130	1.6	1.6	84	2.1	1.8	5	65	8.7	3.2	1.6	184	5.0	1.6	1.1	12	59	6.9	2.5	2.2
					12	90	1.9	1.9	59	2.5	2.2	6	45	10.4	3.8	1.9	128	6.0	1.9	1.3	14	43	8.1	2.9	2.5
					14	66	2.2	2.2	43	2.9	2.5	7	33	12.1	4.5	2.2	94	7.0	2.2	1.6	16	33	9.2	3.4	2.9
					FL	27°	2000	3100	6	86	2.9	2.9	56	3.9	3.3	3	43	5.2	7.0	2.9	122	3.0	3.1	2.0	4
	8	48	3.8	3.8	31				5.2	4.4	4	24	6.9	9.3	3.8	69	4.0	4.1	2.7	6	56	3.5	3.9	3.3	
	10	31	4.8	4.8	20				6.5	5.5	5	16	8.7	11.6	4.8	44	5.0	5.1	3.4	8	31	4.6	5.2	4.4	
	12	22	5.8	5.8	14				7.8	6.7	6	11	10.4	13.9	5.8	30	6.0	6.1	4.1	10	20	5.8	6.5	5.5	
	14	16	6.7	6.7	10				9.1	7.8	7	8	12.1	16.2	6.7	22	7.0	7.1	4.8	12	14	6.9	7.8	6.7	
	FL	40°	2000	2000	6				56	4.0	4.0	36	5.6	4.6	3	28	5.2	12.1	4.0	79	3.0	4.5	2.8	4	81
	8				31	5.4	5.4	20	7.4	6.2	4	16	6.9	16.1	5.4	44	4.0	6.0	3.8	6	36	3.5	5.6	4.6	
10	20				6.7	6.7	13	9.3	7.7	5	10	8.7	20.1	6.7	28	5.0	7.5	4.7	8	20	4.6	7.4	6.2		
12	14				8.0	8.0	9	11.1	9.3	6	7	10.4	24.1	8.0	20	6.0	9.0	5.7	10	13	5.8	9.3	7.7		
14	10				9.4	9.4	7	13.0	10.8	7	5	12.1	**	9.4	14	7.0	10.5	6.6	12	9	6.9	11.1	9.3		

The beam spread in degrees and the beam "L" and "W" in the following tables are computed at 50% of centerbeam candlepower and represent areas of "effective illumination."

**Due to steep aiming angle, length of beam extends beyond 25'.

For additional Lamp Data, reference Juno Lighting Product Guide.

