



TRAC-MASTER®

Avant Garde

GLACIS® SERIES

T880, T882, T883 and T888

Project: _____
 Fixture Type: _____
 Location: _____
 Contact/Phone: _____

PRODUCT DESCRIPTION

Glacis is inspired by the beauty of our natural world. The truncated conical element at the top cloaks the stem pivot when observed from conventional viewing angles. Concealed wiring and sleek trac adapter complete the ultra-clean appearance. The integral bayonet mount accessory holder in the MR16 version, and the optional bayonet mount accessory holder in the PAR30 version, accept up to two accessories simultaneously.

Glacis uses high-quality, die-cast aluminum construction and is available in attractive white, black and silver finishes.



Low Voltage MR16

Construction Die cast aluminum housing.

Lamp 20-50W 12V halogen MR16 bi-pin lamp.

Socket Ceramic bi-pin.


Accessory Holder Integral to fixture design • Die cast aluminum construction • Precision bayonet mounting • Accommodates up to two accessories simultaneously • Clear glass lens included with fixture.

Transformer T537 or T538 12V solid state electronic transformer with on/off switch • Must be ordered separately • Refer to specification sheet D1.2.1.

Aiming 360° horizontal rotation • 90° vertical aiming capability.

Labels UL and C-UL Listed.

Product specifications subject to change without notice.

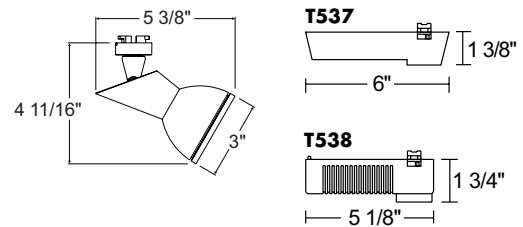

Catalog Number	Finish	Lamp
T880WH	White	20-50W MR16
T880BL	Black	20-50W MR16
T880SL	Silver	20-50W MR16

ACCESSORIES

Cat. No.	Description	Cat. No.	Description	Cat. No.	Description
T741-6	Color Filters/Lenses	T7477	Prismatic Spread Lens	T7478	Linear Spread Lens
T7401-18	Dichroic Lenses	T7420	Diffuse Spread Lens	T7421	Uniformity Lens
T7422	UV Filter Lens	T7459BL	Hexcell Louver		

See specification sheet D1.2.2 for details.

Line Voltage PAR20

Construction Die cast aluminum housing.

Lamp 35-50W PAR20 halogen medium base lamp.


Socket Medium base porcelain with nickel plated copper screw shell.

Adapter Unique, attractive conical-elliptical shaped trac adapter • Copper alloy contacts provide precise spring action – no arcing and will not take a set • True, positive electrical ground • Spring-loaded positive latch with embossed polarity arrow secures trac light to trac • “Pull-up” contact to up position for two-circuit application • Polarity indicator embossed on copper contact.

Aiming 360° horizontal rotation • 90° vertical aiming capability.

Labels UL and C-UL Listed.

Product specifications subject to change without notice.

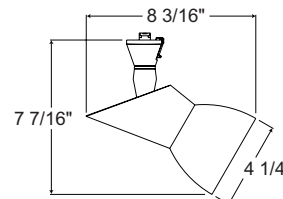


Catalog Number	Finish	Lamp
T882WH	White	35-50W PAR20
T882BL	Black	35-50W PAR20
T882SL	Silver	35-50W PAR20

TRAC-MASTER®

Avant Garde

GLACIS® SERIES**T880, T882, T883 and T888****Line Voltage PAR30****Construction** Die cast aluminum housing.**Lamp** 50-75W PAR30 halogen medium base lamp.**Socket** Medium base porcelain with nickel plated copper screw shell.**Adapter** Unique, attractive conical-elliptical shaped trac adapter • Copper alloy contacts provide precise spring action – no arcing and will not take a set • True, positive electrical ground • Spring-loaded positive latch with embossed polarity arrow secures trac light to trac • “Pull-up” contact to up position for two-circuit application • Polarity indicator embossed on copper contact.**Accessory Holder** Must be ordered separately • Die cast aluminum construction • Precision bayonet mounting • Accommodates up to two accessories simultaneously.**Aiming** 360° horizontal rotation • 90° vertical aiming capability.**Labels** UL and C-UL Listed.

Product specifications subject to change without notice.

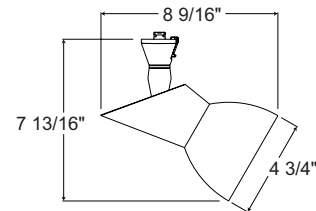

Catalog Number	Finish	Lamp
T883WH	White	50-75W PAR30
T883BL	Black	50-75W PAR30
T883SL	Silver	50-75W PAR30


ACCESSORIES

Cat. No.	Description	Cat. No.	Description
T853MC	Accessory Holder (Specify Finish)	T5678	Linear Spread Lens
T561-6	Color Filters	T5621	Uniformity Lens
T569BL	Cube Cell Louver	T5622	UV Filter
T5677	Prismatic Spread Lens	T5618	Color Correction Filter, 2700K

See specification sheet D1.2.2 for details.

Line Voltage PAR38**Construction** Die cast aluminum housing.**Lamp** 45-150W PAR38 halogen medium base lamp.**Socket** Medium base porcelain with nickel plated copper screw shell.**Adapter** Unique, attractive conical-elliptical shaped trac adapter • Copper alloy contacts provide precise spring action – no arcing and will not take a set • True, positive electrical ground • Spring-loaded positive latch with embossed polarity arrow secures trac light to trac • “Pull-up” contact to up position for two-circuit application • Polarity indicator embossed on copper contact.**Aiming** 360° horizontal rotation • 90° vertical aiming capability.**Labels** UL and C-UL Listed.

Product specifications subject to change without notice.

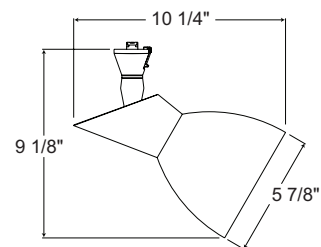

Catalog Number	Finish	Lamp
T888WH	White	45-150W PAR38
T888BL	Black	45-150W PAR38
T888SL	Silver	45-150W PAR38



1300 S. Wolf Road • Des Plaines, IL 60018 • Phone (847) 827-9880 • Fax (847) 827-2925
 220 Chrysler Drive • Brampton, Ontario • Canada L6S 6B6 • Phone (905) 792-7335 • Fax (905) 792-0064
 Visit us at www.junolightinggroup.com

Printed in U.S.A. ©2009 Juno Lighting, LLC.