



TRAC-MASTER®

Avant Garde

CUBIX® SERIES

T890, T892, T893 and T898

Project: _____

Fixture Type: _____


Location: _____

Contact/Phone: _____

PRODUCT DESCRIPTION

Cubix is a study of the visual relationship between two different geometric forms: the ring and the cube. In this design, the stem becomes a central element, forming a pleasing visual extension of the cube form. Concealed wiring and sleek trac adapter offer an ultra-clean appearance. The integral bayonet mount accessory holder in the MR16 version, and the optional bayonet mount accessory holder in the PAR30 version, accept up to two accessories simultaneously.

Cubix uses high-quality, die-cast aluminum construction and is available in attractive white, black and silver finishes.

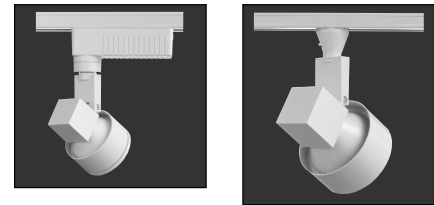

Low Voltage MR16

Construction Die cast aluminum housing.

Lamp 20-50W 12V halogen MR16 bi-pin lamp.

Socket Ceramic bi-pin.


Accessory Holder Integral to fixture design • Die cast aluminum construction • Precision bayonet mounting • Accommodates up to two accessories simultaneously • Clear glass lens included with fixture.

Transformer T537 or T538 12V solid state electronic transformer with on/off switch • Must be ordered separately • Refer to specification sheet D1.2.1.

Aiming 360° horizontal rotation • 90° vertical aiming capability.

Labels UL and C-UL Listed.

Product specifications subject to change without notice.

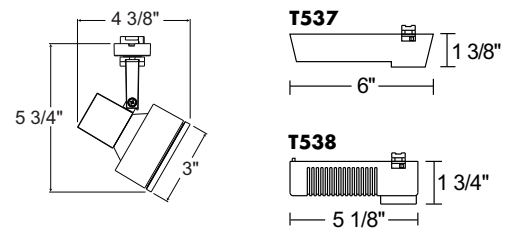

Catalog Number	Finish	Lamp
T890WH	White	20-50W MR16
T890BL	Black	20-50W MR16
T890SL	Silver	20-50W MR16

ACCESSORIES

Cat. No.	Description	Cat. No.	Description	Cat. No.	Description
T741-6	Color Filters/Lenses	T7477	Prismatic Spread Lens	T7478	Linear Spread Lens
T7401-18	Dichroic Lenses	T7420	Diffuse Spread Lens	T7421	Uniformity Lens
T7422	UV Filter Lens	T7459BL	Hexcell Louver		

See specification sheet D1.2.2 for details.

Line Voltage PAR20

Construction Die cast aluminum housing.

Lamp 35-50W PAR20 halogen medium base lamp.


Socket Medium base porcelain with nickel plated copper screw shell.

Adapter Unique, attractive conical-elliptical shaped trac adapter • Copper alloy contacts provide precise spring action – no arcing and will not take a set • True, positive electrical ground • Spring-loaded positive latch with embossed polarity arrow secures trac light to trac • “Pull-up” contact to up position for two-circuit application • Polarity indicator embossed on copper contact.

Aiming 360° horizontal rotation • 90° vertical aiming capability.

Labels UL and C-UL Listed.

Product specifications subject to change without notice.




Catalog Number	Finish	Lamp
T892WH	White	35-50W PAR20
T892BL	Black	35-50W PAR20
T892SL	Silver	35-50W PAR20

TRAC-MASTER®

Avant Garde

CUBIX® SERIES**T890, T892, T893 and T898****Line Voltage PAR30****Construction** Die cast aluminum housing.**Lamp** 50-75W PAR30 halogen medium base lamp.**Socket** Medium base porcelain with nickel plated copper screw shell.**Adapter** Unique, attractive conical-elliptical shaped trac adapter • Copper alloy contacts provide precise spring action – no arcing and will not take a set • True, positive electrical ground • Spring-loaded positive latch with embossed polarity arrow secures trac light to trac • “Pull-up” contact to up position for two-circuit application • Polarity indicator embossed on copper contact.**Accessory Holder** Must be ordered separately • Die cast aluminum construction • Precision bayonet mounting • Accommodates up to two accessories simultaneously.**Aiming** 360° horizontal rotation • 90° vertical aiming capability.**Labels** UL and C-UL Listed.

Product specifications subject to change without notice.



Catalog Number	Finish	Lamp
T893WH	White	50-75W PAR30
T893BL	Black	50-75W PAR30
T893SL	Silver	50-75W PAR30


ACCESSORIES

Cat. No.	Description	Cat. No.	Description
T893MC	Accessory Holder (Specify Finish)	T5678	Linear Spread Lens
T561-6	Color Filters	T5621	Uniformity Lens
T569BL	Cube Cell Louver	T5622	UV Filter
T5677	Prismatic Spread Lens	T5618	Color Correction Filter, 2700K

See specification sheet D1.2.2 for details.

Line Voltage PAR38**Construction** Die cast aluminum housing.**Lamp** 45-150W PAR38 halogen medium base lamp.**Socket** Medium base porcelain with nickel plated copper screw shell.**Adapter** Unique, attractive conical-elliptical shaped trac adapter • Copper alloy contacts provide precise spring action – no arcing and will not take a set • True, positive electrical ground • Spring-loaded positive latch with embossed polarity arrow secures trac light to trac • “Pull-up” contact to up position for two-circuit application • Polarity indicator embossed on copper contact.**Aiming** 360° horizontal rotation • 90° vertical aiming capability.**Labels** UL and C-UL Listed.

Product specifications subject to change without notice.

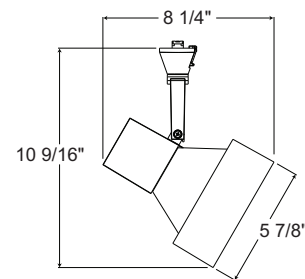

Catalog Number	Finish	Lamp
T898WH	White	45-150W PAR38
T898BL	Black	45-150W PAR38
T898SL	Silver	45-150W PAR38

