



TRAC-MASTER®

Low Voltage

PAR36 SERIES

T446 and T484

Use in conjunction with T537 or T538 Transformer or other Low Voltage monopoint accessories

Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____




PRODUCT DESCRIPTION

Sleek fixture design combined with the precise control of the PAR36 lamps provide dramatic accent lighting

Transformer T537 or T538 12V solid state electronic transformer with on/off switch • Must be ordered separately.

Labels UL listed, CSA certified.

Product specifications subject to change without notice.




Low Voltage PAR36

Construction Steel ring and yoke.

Socket Snap-on terminal cover with contacts.

Aiming 90° vertical aiming capability and 358° rotation.


Catalog Number	Description	Finish	Lamp
T446WH	Gimbal Ring	White	35-50W 12V PAR36
T446BL	Gimbal Ring	Black	35-50W 12V PAR36



Low Voltage PAR36

Socket Snap-on terminal cover with contacts.

Catalog Number	Description	Finish	Lamp
T484WH	Wishbone	White w/ White Adjusting Buttons	35-50W PAR36
T484BL	Wishbone	Black w/ Red Adjusting Buttons	35-50W PAR36
T484SL	Wishbone	Silver w/ Black Adjusting Buttons	35-50W PAR36



TRAC-MASTER®


Low Voltage

PAR36 SERIES

T446 and T484

Use in conjunction with T537 or T538 Transformer or other Low Voltage monopoint accessories

CBCP • Centerbeam candlepower
FC • Footcandles at beam center (aim point)

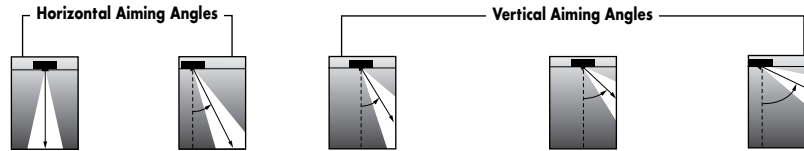

Lamp	Beam Type	Beam Spread°	Rated Life	CBCP	0°		30°			30°				45°				60°							
					MH	FC	L	W	FC	L	W	D	FC	X	L	W	FC	X	L	W	D	FC	X	L	W
35W PAR36 Halogen	VNSP	5°	4000	25000	10	250	0.9	0.9	162	1.2	1.0	4	195	6.9	1.4	0.7	552	4.0	0.7	0.5	8	254	4.6	0.9	0.8
					14	128	1.2	1.2	92	1.6	1.4	6	87	10.4	2.1	1.0	246	6.0	1.0	0.7	10	162	5.8	1.2	1.0
					18	77	1.6	1.6	50	2.1	1.8	8	49	13.9	2.8	1.4	138	8.0	1.4	1.0	12	113	6.9	1.4	1.2
					22	52	1.9	1.9	34	2.6	2.2	10	31	17.3	3.5	1.7	88	10.0	1.7	1.2	14	83	8.1	1.6	1.4
	NSP	8°	4000	20000	10	200	1.4	1.4	130	1.9	1.6	4	156	6.9	2.3	1.1	442	4.0	1.1	0.8	6	361	3.5	1.1	1.0
					12	139	1.7	1.7	90	2.2	1.9	6	69	10.4	3.4	1.7	196	6.0	1.7	1.2	8	203	4.6	1.5	1.3
					14	102	2.0	2.0	66	2.6	2.3	8	39	13.9	4.5	2.2	110	8.0	2.2	1.6	10	130	5.8	1.9	1.6
					16	78	2.2	2.2	51	3.0	2.6	10	25	17.3	5.7	2.8	71	10.0	2.8	2.0	12	90	6.9	2.2	1.9
	FL	30°	4000	900	4	56	2.1	2.1	37	2.9	2.5	2	28	3.5	5.5	2.1	90	2.0	2.3	1.5	2	146	1.2	1.5	1.2
					6	25	3.2	3.2	16	4.4	3.7	3	13	5.2	8.2	3.2	35	3.0	3.5	2.3	3	65	1.7	2.2	1.9
					8	14	4.3	4.3	9	5.9	5.0	4	7	6.9	10.9	4.3	20	4.0	4.6	3.0	4	37	2.3	2.9	2.5
					10	9	5.4	5.4	6	7.3	6.2	5	5	8.7	13.7	5.4	13	5.0	5.8	3.8	5	23	2.9	3.7	3.1
50W PAR36 Halogen	VNSP	5°	4000	35000	14	179	1.2	1.2	116	1.6	1.4	8	68	13.9	2.8	1.4	193	8.0	1.4	1.0	9	281	5.2	1.0	0.9
					18	108	1.6	1.6	70	2.1	1.8	10	44	17.3	3.5	1.7	124	10.0	1.7	1.2	10	227	5.8	1.2	1.0
					22	72	1.9	1.9	47	2.6	2.2	12	30	20.8	4.2	2.1	86	12.0	2.1	1.5	11	188	6.4	1.3	1.1
					26	52	2.3	2.3	34	3.0	2.6	14	22	24.2	4.9	2.4	63	14.0	2.4	1.7	12	158	6.9	1.4	1.2
	NSP	8°	4000	30000	10	208	1.7	1.7	135	2.2	1.9	6	104	10.4	3.4	1.4	295	6.0	1.7	1.2	8	304	4.6	1.5	1.3
					16	117	2.2	2.2	76	3.0	2.6	8	59	13.9	4.5	2.2	166	8.0	2.2	1.6	9	241	5.2	1.7	1.5
					20	75	2.8	2.8	49	3.7	3.2	10	38	17.3	5.7	2.8	106	10.0	2.8	2.0	10	195	5.8	1.9	1.6
					24	52	3.4	3.4	34	4.5	3.9	12	26	20.8	6.8	3.4	74	12.0	3.4	2.4	11	161	6.4	2.1	1.8
	FL	30°	4000	1300	4	81	2.1	2.1	53	2.9	2.5	2	41	3.5	5.5	2.1	115	2.0	2.3	1.5	2	211	1.2	1.5	1.2
					6	36	4.1	4.1	23	5.7	4.8	3	18	5.2	12.8	4.1	51	3.0	4.7	2.9	3	94	1.7	2.9	2.4
					8	20	5.5	5.5	13	7.6	6.4	4	10	6.9	17.1	5.5	29	4.0	6.3	3.9	4	53	2.3	3.8	3.2
					10	13	6.9	6.9	8	9.6	8.0	5	7	8.7	21.4	6.9	18	5.0	7.8	4.9	5	34	2.9	4.8	4.0
					12	9	8.3	8.3	6	11.5	9.5	6	5	10.4	**	8.3	13	6.0	9.4	5.8	6	23	3.5	5.7	4.8

The beam spread in degrees and the beam "L" and "W" in the following tables are computed at 50% of centerbeam candlepower and represent areas of "effective illumination."

**Due to steep aiming angle, length of beam extends beyond 25'.

