

# Installation Instructions


## For Juno AVIO and UNO/DUO System Trims (Airfoils)

**CAUTION:** To avoid risk of electric shock, Trim (Airfoil) installation should be done only when the fixture is detached from the Trac or monopoint.

### AVIO™/UNO/DUO™ Trims

1. Align trim (Airfoil) apertures with fixture gimbal rings.
2. Place spring clips over one side of fixture frame, with the clips resting on top of the fixture frame.
3. As shown in Fig. 1, grasp trim spring clips while pulling clips outward. Push trim upward until it is seated against the fixture frame.
4. Release spring clips taking care that the clips rest against the top of the fixture frame.

Fig. 1

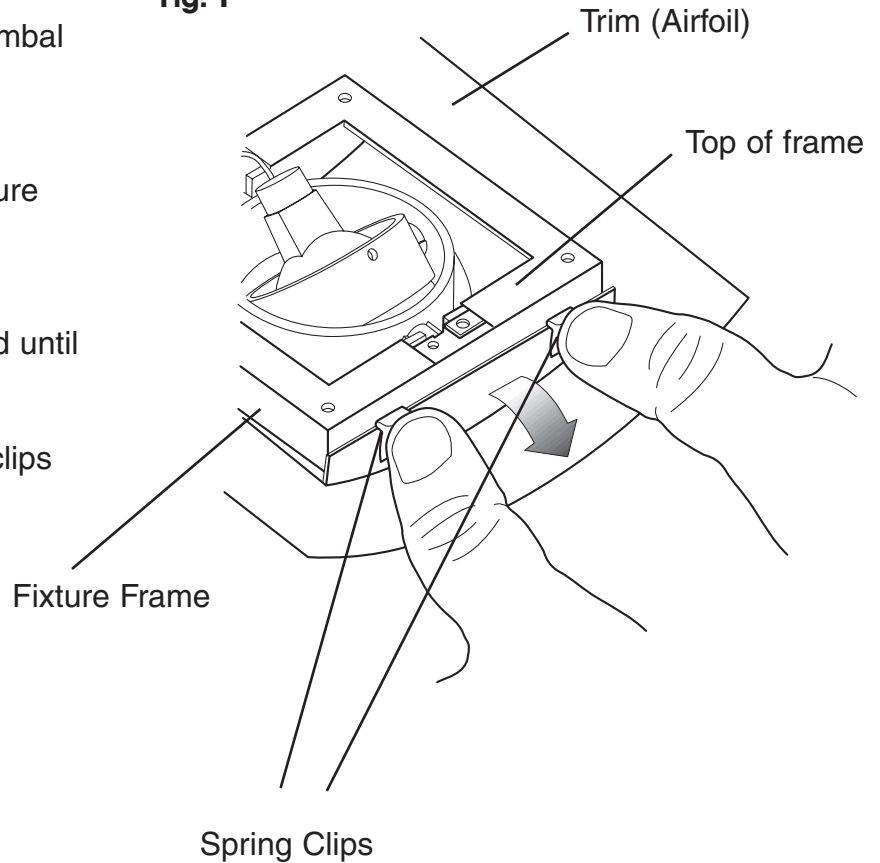

### WARRANTY

Juno warrants that its products are free from defects in material and workmanship. Juno's obligation is expressly limited to repair or replacement, without charge, at Juno's factory after prior written return authorization has been granted. This warranty shall not apply to products which have been altered or repaired outside of Juno's factory. This warranty is in lieu of all other warranties, express or implied, and without limiting the generality of the foregoing phrase, excludes any implied warranty of merchantability. Also, there are no warranties which extend beyond the description of the product on the company's literature setting forth terms of sale.

Product Services phone # (888) 387-2212