

**Type:**  
**Job:**  
**Mounting Options Catalog number:**

**Approvals:**

Mounting Options and Finishes

**Date:**  
**Page: 1 of 1**


**Landscape Light Post by  
Engineered Products Co.**

Cat. No.

☐ **EP17**

☐ **No Option**

PVC fixture molded in black with 1/2" NPT mount is corrosion free and UV resistant. Replaces EMT, conduit connectors and weatherproof boxes. 100% shatter resistant against denting and cracking. Angled bottom to eliminate cable congestion.  
17 1/2" post length

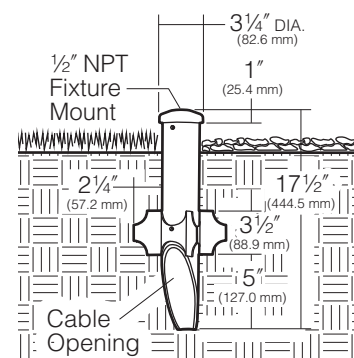

**Low Voltage Spear Mount**

Cat. No.

Finish

☐ **KLV400BL** Black

☐ **KLV400DB** Dark Bronze


☐ **KLV400GR** Verde Green

☐ **No Option**

Die-cast low copper aluminum with 1/2" NPSM fixture mount. Stainless steel set screw locks fixture into mount. Cable slot allows easy fixture mounting before or after installation in ground. Super TGIC powder coat paint over clear anodizing and titanated zirconium conversion coating.

**Spear Mounting in Concrete**

In addition to soil mounting, the KLV400 can be installed in a concrete footing for added stability and permanence.

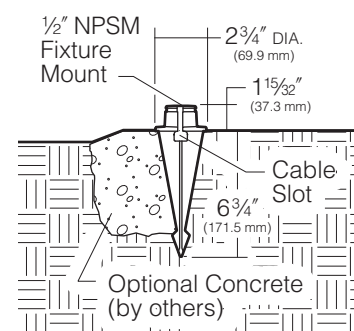

**Low Voltage Surface Mount**

Cat. No.

Finish


☐ **KLV405BL** Black

☐ **KLV405DB** Dark Bronze

☐ **KLV405GR** Verde Green

☐ **No Option**

Die-cast low copper aluminum with 1/2" NPSM fixture mount. Stainless steel set screw locks fixture into mount. Two holes provided for flat head wood screws. Super TGIC powder coat paint over clear anodizing and titanated zirconium conversion coating.



**Extension Module**

Cat. No.

Finish


☐ **KLV415BL** Black

☐ **KLV415DB** Dark Bronze

☐ **KLV415GR** Verde Green

☐ **No Option**

For raising fixtures to a height above foliage for efficient and unobstructed operation. Constructed of 1 5/8" diameter extruded aluminum with die-cast ends. 1/2" NPSM female thread on one end, and other end has a 1/2" NPSM solid brass nipple. Stainless steel allen head set screw locks fixture onto mount. Super TGIC powder coat paint over titanated zirconium conversion coating. Two modules may be stacked for additional height.

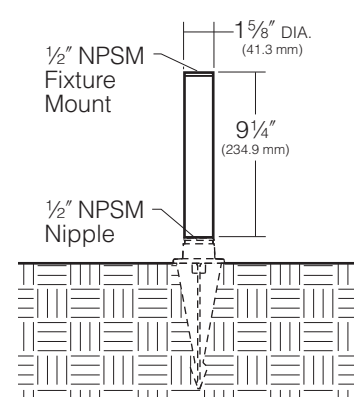

KIM LIGHTING RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.