

Type: Job: Fixture Catalog number: <hr/> Fixture and Finish	Fixture Options: <hr/> Ordered Separately from Fixture See page 2	Approvals: Date: Page: 1 of 3
	Mounting Options: <hr/> Ordered Separately from Fixture See page 3	

Specifications

Housing: Die-cast low copper aluminum.

Compression Ring: Die-cast aluminum threaded to body, with silicone gasket. Black anodized finish.

Swivel: Die-cast aluminum with locking teeth and 1/2" solid brass NPT mount. Provides horizontal rotation independent of the threaded mount. Swivel locked by 1/4-20 stainless set screw. Clear anodized prior to powder coating for added corrosion resistance.


Lens: Tempered glass with silicone gasket.

Socket: GU4 socket for bipin lamp.

Wiring: 6' No. 18-2 12 Volt cable with fork connectors.

Finish: Super TGIC thermoset polyester powder coat paint, 2.5 mil nominal thickness, applied over a titanated zirconium conversion coating; 2500 hour salt spray test endurance rating. Standard colors are Black (**BL**), Dark Bronze (**DB**), and Verde Green (**GR**).

Certification: UL Listed to U.S. and Canadian safety standards for wet locations.



ORDERING INFORMATION

Fixture*	Finish
<input type="checkbox"/> KLV200BL	Black
<input type="checkbox"/> KLV200DB	Dark Bronze
<input type="checkbox"/> KLV200GR	Verde Green

Wattage / Lamp

20W - 50W
 MR11 Bipin
 Halogen

*Remote transformer required.

Type:

Job:

Page: 2 of 3



Fixture Options

Ordered Separately from Fixture

Lens Accessories
 Cat. No. (See right)
 No Option

PL11 - Prismatic Lens: Softens lamp distribution and flattens beam spread. Best with flood lamps. Replaces standard clear lens.
 Cat. No.

PL11 Prismatic Lens



SL11 - Spread Lens: Creates an oval beam pattern, more narrow in one beam axis. Best with spot lamps. Replaces standard clear lens.
 Cat. No.

SL11 Spread Lens



Type:
 Job:




Mounting Options

Ordered Separately from Fixture

Landscape Light Post by Engineered Products Co.

- Cat. No.
 EP17
 No Option

PVC fixture molded in black with 1/2" NPT mount is corrosion free and UV resistant. Replaces EMT, conduit connectors and weatherproof boxes. 100% shatter resistant against denting and cracking. Angled bottom to eliminate cable congestion.
 17 1/2" post length

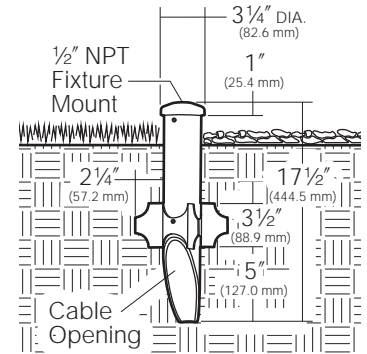


Low Voltage Spear Mount

- Cat. No. Finish
 KLV400BL Black
 KLV400DB Dark Bronze
 KLV400GR Verde Green
 No Option

Die-cast low copper aluminum with 1/2" NPSM fixture mount. Stainless steel set screw locks fixture into mount. Cable slot allows easy fixture mounting before or after installation in ground. Super TGIC powder coat paint over clear anodizing and titanated zirconium conversion coating.

Spear Mounting in Concrete


In addition to soil mounting, the KLV400 can be installed in a concrete footing for added stability and permanence.

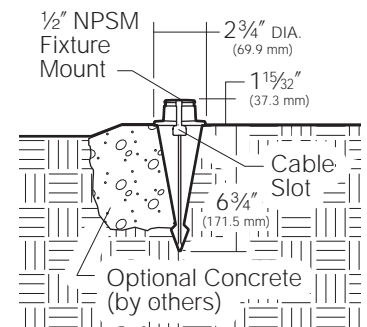

Low Voltage Surface Mount

- Cat. No. Finish
 KLV405BL Black
 KLV405DB Dark Bronze
 KLV405GR Verde Green
 No Option

Die-cast low copper aluminum with 1/2" NPSM fixture mount. Stainless steel set screw locks fixture into mount. Two holes provided for flat head wood screws. Super TGIC powder coat paint over clear anodizing and titanated zirconium conversion coating.



Extension Module

- Cat. No. Finish
 KLV415BL Black
 KLV415DB Dark Bronze
 KLV415GR Verde Green
 No Option

For raising fixtures to a height above foliage for efficient and unobstructed operation. Constructed of 1 5/8" diameter extruded aluminum with die-cast ends. 1/2" NPSM female thread on one end, and other end has a 1/2" NPSM solid brass nipple. Stainless steel allen head set screw locks fixture onto mount. Super TGIC powder coat paint over titanated zirconium conversion coating. Two modules may be stacked for additional height.

