

Type:
Job:
Fixture Catalog number:

Fixture and Finish

Fixture Options:

Ordered Separately from Fixture
 See page 2

Mounting Options:


Ordered Separately from Fixture
 See page 3

Approvals:

Date:
Page: 1 of 3

Specifications

Housing: Die-cast low copper aluminum.
Compression Ring: Die-cast aluminum threaded to body, with silicone gasket. Black anodized finish.
Swivel: Die-cast aluminum with locking teeth and 1/2" solid brass NPT mount. Provides horizontal rotation independent of the threaded mount. Swivel locked by 1/4-20 stainless set screw. Clear anodized prior to powder coating for added corrosion resistance.
Lens: Tempered glass with silicone gasket.
Socket: G4 to GY6.35 socket for bipin lamp.
Wiring: 6' No. 18-2 12 Volt cable with fork connectors.
Finish: Super TGIC thermoset polyester powder coat paint, 2.5 mil nominal thickness, applied over a titanated zirconium conversion coating; 2500 hour salt spray test endurance rating. Standard colors are Black (**BL**), Dark Bronze (**DB**), and Verde Green (**GR**).
Certification: UL Listed to U.S. and Canadian safety standards for wet locations.



ORDERING INFORMATION

Fixture*	Finish
<input type="checkbox"/> KLV201BL	Black
<input type="checkbox"/> KLV201DB	Dark Bronze
<input type="checkbox"/> KLV201GR	Verde Green

Wattage / Lamp
20W - 75W
MR16 Bipin
Halogen

*Remote transformer required.



KIM LIGHTING RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.

Type:




Job:

Page: 2 of 3



Fixture Options

Ordered Separately from Fixture

<p>Internal Louver Cat. No. <input type="checkbox"/> L12 <input type="checkbox"/> No Option</p>	<p>Clips onto rim of MR16 lamp and provides additional brightness control.</p>	
<p>Lens Accessories Cat. No. (See right) <input type="checkbox"/> No Option</p>	<p>PL - Prismatic Lens: Softens lamp distribution and flattens beam spread. Best with flood lamps. Inserts behind lens. Cat. No. <input type="checkbox"/> PL Prismatic Lens</p>	
	<p>SL - Spread Lens: Creates an oval beam pattern, more narrow in one beam axis. Best with spot lamps. Inserts behind lens. Cat. No. <input type="checkbox"/> SL Spread Lens</p>	

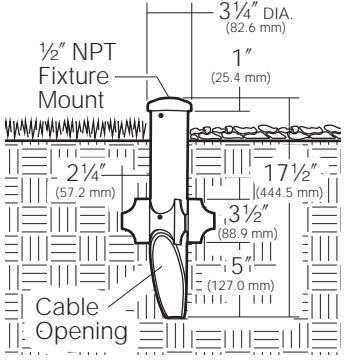
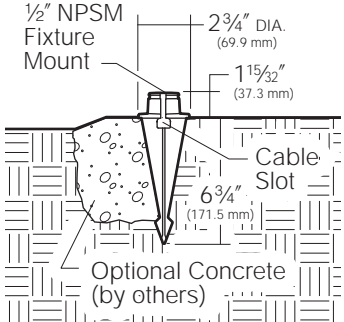
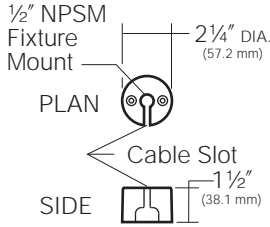
Type:

Job:



Mounting Options

Ordered Separately from Fixture

<p>Landscape Light Post by Engineered Products Co.</p> <p>Cat. No.</p> <p><input type="checkbox"/> EP17</p> <p><input type="checkbox"/> No Option</p>	<p>PVC fixture molded in black with 1/2" NPT mount is corrosion free and UV resistant. Replaces EMT, conduit connectors and weatherproof boxes. 100% shatter resistant against denting and cracking. Angled bottom to eliminate cable congestion.</p> <p>17 1/2" post length</p>	
<p>Low Voltage Spear Mount</p> <p>Cat. No. Finish</p> <p><input type="checkbox"/> KLV400BL Black</p> <p><input type="checkbox"/> KLV400DB Dark Bronze</p> <p><input type="checkbox"/> KLV400GR Verde Green</p> <p><input type="checkbox"/> No Option</p>	<p>Die-cast low copper aluminum with 1/2" NPSM fixture mount. Stainless steel set screw locks fixture into mount. Cable slot allows easy fixture mounting before or after installation in ground. Super TGIC powder coat paint over clear anodizing and titanated zirconium conversion coating.</p> <p>Spear Mounting in Concrete</p> <p>In addition to soil mounting, the KLV400 can be installed in a concrete footing for added stability and permanence.</p>	
<p>Low Voltage Surface Mount</p> <p>Cat. No. Finish</p> <p><input type="checkbox"/> KLV405BL Black</p> <p><input type="checkbox"/> KLV405DB Dark Bronze</p> <p><input type="checkbox"/> KLV405GR Verde Green</p> <p><input type="checkbox"/> No Option</p>	<p>Die-cast low copper aluminum with 1/2" NPSM fixture mount. Stainless steel set screw locks fixture into mount. Two holes provided for flat head wood screws. Super TGIC powder coat paint over clear anodizing and titanated zirconium conversion coating.</p>	
<p>Extension Module</p> <p>Cat. No. Finish</p> <p><input type="checkbox"/> KLV415BL Black</p> <p><input type="checkbox"/> KLV415DB Dark Bronze</p> <p><input type="checkbox"/> KLV415GR Verde Green</p> <p><input type="checkbox"/> No Option</p>	<p>For raising fixtures to a height above foliage for efficient and unobstructed operation. Constructed of 1 5/8" diameter extruded aluminum with die-cast ends. 1/2" NPSM female thread on one end, and other end has a 1/2" NPSM solid brass nipple. Stainless steel allen head set screw locks fixture onto mount. Super TGIC powder coat paint over titanated zirconium conversion coating. Two modules may be stacked for additional height.</p>	