

Type: Job: Fixture Catalog number: <hr/> Fixture and Finish	Fixture Options: <hr/> Ordered Separately from Fixture See page 2	Approvals: Date: Page: 1 of 2
	Mounting Options: <hr/> Ordered Separately from Fixture See page 3	

Specifications

Housing and Shield: Die-cast low copper aluminum.

Swivel: Die-cast aluminum with locking teeth and 1/2" solid brass NPT mount. Provides horizontal rotation independent of the threaded mount. Swivel locked by 1/4-20 stainless set screw. Clear anodized prior to powder coating for added corrosion resistance.


Lens: Convex clear tempered glass with silicone gasket.

Driver / Optical System: 3 LED emitters configured in a triangle array comprised together as a module. Each LED is encapsulated under a precision optical prism to produce a narrow flood pattern. The -40c driver is within the module and operates on 12V AC or DC current, 10 watt, 0.83 amp

Wiring: 6' No. 18-2 12 Volt cable with fork connectors.


Finish: Each luminaire receives a fade and abrasion resistant, electrostatically applied, thermally cured, triglycidal isocyanurate (TGIC) polyester powdercoat finish. Standard colors include (BL) Black, (DB) Dark Bronze, Verde Green (GR).

Certification: UL Listed to U.S. and Canadian safety standards for wet locations.



ORDERING INFORMATION

Fixture	Finish
<input type="checkbox"/> KLVL206BL	Black
<input type="checkbox"/> KLVL206DB	Dark Bronze
<input type="checkbox"/> KLVL206GR	Verde Green

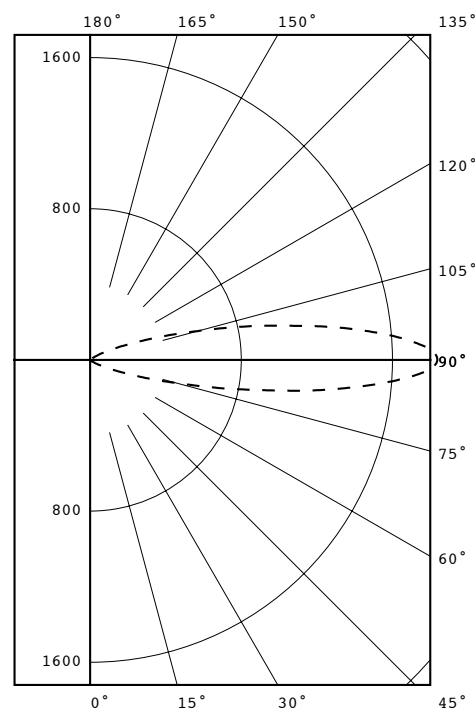

Catalog Number: KLVL206-3L3K
 Report Number: kl03892
 Voltage: 12 Watts: 10 Amps: 0.83
 Lumens: 388 CBCP: 1826 Beam: 20°
 CCT: 3000K Efficacy: 38.8 Lm/W



KIM LIGHTING RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.

Type:

Job:

Page: 2 of 2



Mounting Options

Ordered Separately from Fixture

Landscape Light Post by Engineered Products Co.


Cat. No.

☐ **EP17**

☐ **No Option**

PVC fixture molded in black with 1/2" NPT mount is corrosion free and UV resistant. Replaces EMT, conduit connectors and weatherproof boxes. 100% shatter resistant against denting and cracking. Angled bottom to eliminate cable congestion.

17 1/2" post length

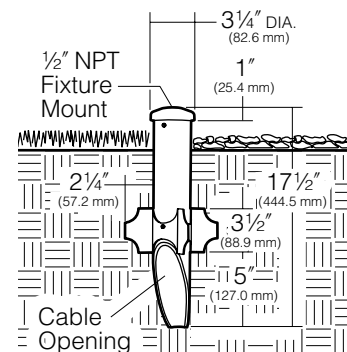

Low Voltage Spear Mount

Cat. No. Finish

☐ **KLV400BL** Black

☐ **KLV400DB** Dark Bronze


☐ **KLV400GR** Verde Green

☐ **No Option**

Die-cast low copper aluminum with 1/2" NPSM fixture mount. Stainless steel set screw locks fixture into mount. Cable slot allows easy fixture mounting before or after installation in ground. Super TGIC powder coat paint over clear anodizing and titanated zirconium conversion coating.

Spear Mounting in Concrete

In addition to soil mounting, the KLV400 can be installed in a concrete footing for added stability and permanence.



Low Voltage Surface Mount

Cat. No. Finish


☐ **KLV405BL** Black

☐ **KLV405DB** Dark Bronze

☐ **KLV405GR** Verde Green

☐ **No Option**

Die-cast low copper aluminum with 1/2" NPSM fixture mount. Stainless steel set screw locks fixture into mount. Two holes provided for flat head wood screws. Super TGIC powder coat paint over clear anodizing and titanated zirconium conversion coating.



Extension Module

Cat. No. Finish

☐ **KLV415BL** Black

☐ **KLV415DB** Dark Bronze

☐ **KLV415GR** Verde Green

☐ **No Option**

For raising fixtures to a height above foliage for efficient and unobstructed operation. Constructed of 1 5/8" diameter extruded aluminum with die-cast ends. 1/2" NPSM female thread on one end, and other end has a 1/2" NPSM solid brass nipple. Stainless steel allen head set screw locks fixture onto mount. Super TGIC powder coat paint over titanated zirconium conversion coating. Two modules may be stacked for additional height.

