

Type:
Job:
Fixture Catalog number:

Fixture and Finish

Fixture Options:

Ordered Separately from Fixture
 See page 2

Approvals:

Date:
Page: 1 of 2

Specifications

Lens Ring: Die-cast low copper aluminum. Five captive 1/4" blackened stainless steel hex-socket cap screws.

Lens: Clear tempered soda lime, 3/16" thick, flush with lens ring, slightly crowned.

Lens Gasket: One-piece molded silicone, U-channel wraps completely around lens flange.

Housing: Die-cast low copper alloy aluminum.

Bracket: Mounted on yoke providing ±15° vertical adjustment and 340° rotation, locking screws, black anodized gimble ring.

Cable: 6' #18-2 12 Volt cable with fork connector, sealed entry into body with anti-siphon plug.

Optical System: A total of 3 LED emitters configured in a rectangular array comprised together as a module. Available in 3500K and 5100K.

Driver: Constant current electronic driver. Available in 12V input. -40°F. starting temperature. All drivers are Underwriters Laboratories recognized.


Finish: Super TGIC thermoset polyester powder coat paint, 2.5 mil nominal thickness, applied over a titanated zirconium conversion coating; 2500 hour salt spray test endurance rating. Standard colors are Black (**BL**), Dark Bronze (**DB**), and Verde Green (**GR**).

Certification: UL Listed to U.S. and Canadian safety standards for wet locations.

ORDERING INFORMATION

Fixture	Source	Finish
<input type="checkbox"/> KLV361/3L3K/BL	3.6W, 3 LED's, 3500K ¹	Black
<input type="checkbox"/> KLV361/3L5K/BL	3.6W, 3 LED's, 5100K ¹	
<input type="checkbox"/> KLV361/3L3K/DB	3.6W, 3 LED's, 3500K ¹	Dark Bronze
<input type="checkbox"/> KLV361/3L5K/DB	3.6W, 3 LED's, 5100K ¹	
<input type="checkbox"/> KLV361/3L3K/GR	3.6W, 3 LED's, 3500K ¹	Verde Green
<input type="checkbox"/> KLV361/3L5K/GR	3.6W, 3 LED's, 5100K ¹	

¹.3 Max Amps.

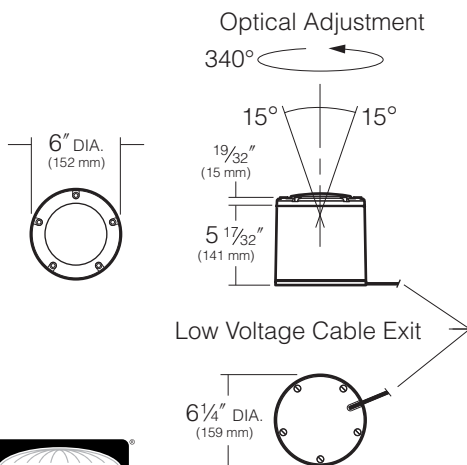

KIM LIGHTING RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.

Type:

Job:

Page: 2 of 2



Fixture Options

Ordered Separately from Fixture

Lens Accessories

Cat. No. (See right)
 No Option

HL73 - Hex Cell Louver: Constructed of hex cell aluminum louvers providing 45° cutoff, mounted in a circular frame, finished in baked high-heat flat black. Can be used in combination with colored lenses. Inserts behind lens into lens gasket. Cannot be used in combination with **SL** spread or **PL** prismatic lenses.

Cat. No.

HL73 Hex Cell Louver



PL73 - Prismatic Lens: Softens lamp distribution and flattens beam spread. Best with flood lamps. Inserts behind lens into lens gasket. Cannot be used in combination with **HL73** louver.

Cat. No.

PL73 Prismatic Lens



SL73 - Spread Lens: Creates an oval beam pattern, more narrow in one beam axis. Best with spot lamps. Inserts behind lens into lens gasket. Cannot be used in combination with **HL73** louver.

Cat. No.

SL73 Spread Lens



Transformer Options

See "12-15 Volt Variable Transformers" on kimlighting.com - Product Specifications - Landscape 12 Volt-120Volt section.