

Type: Job: Fixture Catalog number:	Fixture Options:	Approvals:
Fixture and Finish	Ordered Separately from Fixture See page 2	Date: Page: 1 of 2

Specifications

Housing and Lens Frame: Die-cast low copper alloy aluminum. Frame with silicone gasket, attaches to housing with four captive ¼-20 stainless steel, slotted cap screws.

Arm: Cast aluminum. Head is independently rotatable 360° vertically from top dead center. Head may be positioned straight up. Set screw provided for locking position.

Wall Plate: Die-cast low copper alloy aluminum. Attaches to stainless steel plate for mounting to any standard electrical outlet box. Internal set screw provided for locking position.


Lens: Tempered clear soda lime glass with silicone gasket. Flush with lens frame to promote water runoff when positioned upward.

Socket: Porcelain medium base.

Wiring: No. 18AWM rated 105°C.

Finish: Super TGIC thermoset polyester powder coat paint, 2.5 mil nominal thickness, applied over a titanated zirconium conversion coating; 2500 hour salt spray test endurance rating. Standard colors are Black (**BL**), Dark Bronze (**DB**), and Verde Green (**GR**).

Certification: UL Listed to U.S. and Canadian safety standards for wet locations. Fixture manufacturer shall employ a quality program that is certified to meet the ISO 9001:2000 standard.

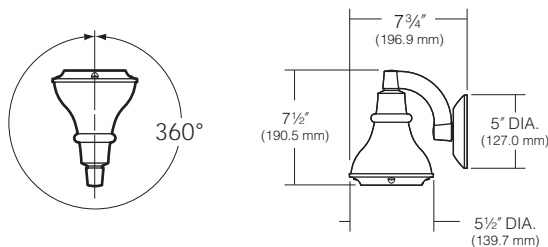

ORDERING INFORMATION

Fixture	Finish
<input type="checkbox"/> AN50BL	Black
<input type="checkbox"/> AN50DB	Dark Bronze
<input type="checkbox"/> AN50GR	Verde Green

Wattage / Lamp
50W PAR20 Halogen
60W A-19 Incandescent



KIM LIGHTING RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.

Type:

Job:

Page: 2 of 2



Fixture Options

Ordered Separately from Fixture

Lens Accessories
 Cat. No. (See right)
 No Option

HL72 - Hex Cell Louver: Constructed of hex cell aluminum louvers providing 45° cutoff, mounted in a circular frame, finished in baked high-heat flat black. Can be used in combination with colored lenses. Inserts behind lens into lens gasket. Cannot be used in combination with **SL** spread or **PL** prismatic lenses.



Cat. No.
 HL72 Hex Cell Louver

PL72 - Prismatic Lens: Softens lamp distribution and flattens beam spread. Best with flood lamps. Inserts behind lens into lens gasket. Cannot be used in combination with **HL72** louver.



Cat. No.
 PL72 Prismatic Lens

SL72 - Spread Lens: Creates an oval beam pattern, more narrow in one beam axis. Best with spot lamps. Inserts behind lens into lens gasket. Cannot be used in combination with **HL72** louver.



Cat. No.
 SL72 Spread Lens