

Type:
Job:
Fixture Catalog number:

Fixture Mode / Finish

Fixture Options:

Ordered Separately from Fixture
See page 2

Approvals:

Date:
Page: 1 of 3

Specifications

Housing and Lens Frame: Die-cast, low copper alloy (<0.6% Cu) aluminum. Frame with silicone gasket, attaches to housing with four captive 1/4-20 stainless steel, slotted cap screws.

Arm: Cast aluminum. Head is independently rotatable 360° vertically from top dead center. Head may be positioned straight up. Set screw provided for locking position.

Wall Plate: Die-cast, low copper alloy (<0.6% Cu) aluminum. Attaches to stainless steel plate for mounting to any standard electrical outlet box. Internal set screw provided for locking position.


Lens: Tempered clear soda lime glass with silicone gasket. Flush with lens frame to promote water runoff when positioned upward.

Wiring: No. 18AWM rated 105°C.

Finish: Super TGIC thermoset polyester powder coat paint, 2.5 mil nominal thickness, applied over a titanated zirconium conversion coating; 2500 hour salt spray test endurance rating. Standard colors are Black (**BL**), Dark Bronze (**DB**), and Verde Green (**GR**).

Optical System: A total of 3 or 9 LED emitters configured in a rectangular array comprised together as a module. Available in 3000K, 4200K, and 5100K.

Driver: Universal Voltage from 120 to 277V with a ±10% tolerance. -40°F. starting temperature. All drivers are Underwriters Laboratories recognized.

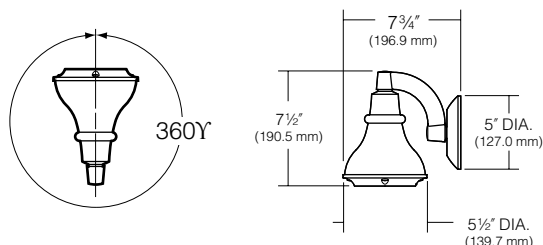

ORDERING INFORMATION

Fixture	Source
<input type="checkbox"/> AN52/ 3L3KUV ¹	5.3W, 3 LED's, 3000K
<input type="checkbox"/> AN52/ 3L4KUV ¹	5.3W, 3 LED's, 4200K
<input type="checkbox"/> AN52 / 3L5KUV ¹	5.3W, 3 LED's, 5100K

Fixture	Source
<input type="checkbox"/> AN52/ 9L3KUV ¹	11.9W, 9 LED's, 3500K
<input type="checkbox"/> AN52/ 9L4KUV ¹	11.9W, 9 LED's, 4200K
<input type="checkbox"/> AN52 / 9L5/UV ¹	11.9W, 9 LED's, 5100K

¹ Universal Voltage from 120 to 277V with a ±10% tolerance.
For 5.3W, Max Amps. are .040 for 120V, .030 for 208V, .020 for 240V,
.020 for 277V. For 11.9W, Max Amps. are .28.

Finish

- ☐ **BL**- Black
- ☐ **DB** - Dark Bronze
- ☐ **GR** - Verde Green

Listings and Ratings

UL cUL 1598 ¹	IP66 Rated	25C Ambient
--------------------------	------------	-------------

¹Suitable for wet locations

KIM LIGHTING RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.

Type:

Job:

Page: 2 of 3

Fixture Options

Ordered Separately from Fixture

Lens Accessories

Cat. No. (See right)

☐ No Option

HL72 - Hex Cell Louver: Constructed of hex cell aluminum louvers providing 45° cutoff, mounted in a circular frame, finished in baked high-heat flat black. Can be used in combination with colored lenses. Inserts behind lens into lens gasket. Cannot be used in combination with **SL** Spread or **PL** Prismatic Lenses.

Cat. No.

☐ **HL72** Hex Cell Louver



PL72 - Prismatic Lens: Softens lamp distribution and flattens beam spread. Best with flood lamps. Inserts behind lens into lens gasket. Cannot be used in combination with **HL** series Louvers.

Cat. No.

☐ **PL72** Prismatic Lens



SL72 - Spread Lens: Creates an oval beam pattern, more narrow in one beam axis. Best with spot lamps. Inserts behind lens into lens gasket. Cannot be used in combination with **HL** series Louvers.

Cat. No.

☐ **SL72** Spread Lens[∞]



Type:

Job:

Page: 3 of 3

Lumen Data

Spectroradiometric			
	3000K	4200K	5100K
Correlated Color Temp. CCT (K)	2800 to 3175K	3800 to 4600K	4600 to 5600K
Color Rendering Index (CRI)	≥75	≥70	≥65

ELECTRICAL - Drive Current @350mA (3 LEDs)		
Volts -AC	Amps - AC	System Watts
120	0.04	5.3
208	0.03	5.3
240	0.02	5.3
277	0.02	5.3

ELECTRICAL - Drive Current @350mA (9 LEDs)		
Volts -AC	Amps - AC	System Watts
120	0.28	11.9
208	0.28	11.9
240	0.28	11.9
277	0.28	11.9

Absolute Lumens (3 LEDs)	
Temperature	AN52/3L*K
3000K	199.7
4200K	205.1
5100K	206

Absolute Lumens (9 LEDs)	
Temperature	AN52/9L*K
3000K	618.7
4200K	703.6
5100K	823.9

Lumens Per Watt (3 LEDs)	
Temperature	AN52/3L*K
3000K	37.7
4200K	38.7
5100K	38.9

Lumens Per Watt (9 LEDs)	
Temperature	AN52/9L*K
3000K	52.0
4200K	59.1
5100K	69.2