

Type: Job: Fixture Catalog number:	Fixture Options:	Approvals: Date: Page: 1 of 2
<hr/> Fixture and Finish	<hr/> Ordered Separately from Fixture See page 2	

Specifications

Housing and Lens Frame: Die-cast brass. Frame with silicone gasket, attaches to housing with four captive 1/4-20 stainless steel, slotted cap screws.

Arm: Cast brass. Head is independently rotatable 360° vertically from top dead center. Head may be positioned straight up. Set screw provided for locking position.

Wall Plate: Die-cast brass. Attaches to stainless steel plate for mounting to any standard electrical outlet box. Internal set screw provided for locking position.

Lens: Tempered clear soda lime glass with silicone gasket. Flush with lens frame to promote water runoff when positioned upward.

Socket: Porcelain medium base.


Wiring: No. 18AWM rated 105°C.

Finish: Natural Brass **(NB)** and Verde Green Patina **(VG)**.

Certification: UL Listed to U.S. and Canadian safety standards for wet locations. Fixture manufacturer shall employ a quality program that is certified to meet the ISO 9001:2000 standard.

ORDERING INFORMATION

Fixture	Finish
<input type="checkbox"/> AN55NB	Natural Brass
<input type="checkbox"/> AN55VG	Verde Green Patina
Wattage / Lamp	
50W	
PAR20	
Halogen	
60W	
A-19	
Incandescent	

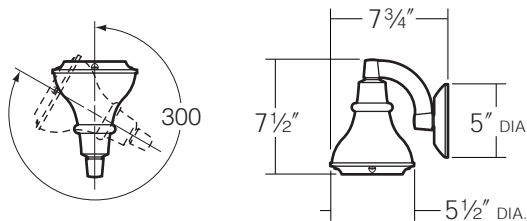

Type:

Job:

Page: 2 of 2



Fixture Options

Ordered Separately from Fixture

Lens Accessories

Cat. No. (See right)

☐ No Option

HL72 - Hex Cell Louver: Constructed of hex cell aluminum louvers providing 45° cutoff, mounted in a circular frame, finished in baked high-heat flat black. Can be used in combination with colored lenses. Inserts behind lens into lens gasket. Cannot be used in combination with **SL** Spread or **PL** Prismatic Lenses.

Cat. No.

☐ **HL72** Hex Cell Louver



PL72 - Prismatic Lens: Softens lamp distribution and flattens beam spread. Best with flood lamps. Inserts behind lens into lens gasket. Cannot be used in combination with **HL** series Louvers.

Cat. No.

☐ **PL72** Prismatic Lens



SL72 - Spread Lens: Creates an oval beam pattern, more narrow in one beam axis. Best with spot lamps. Inserts behind lens into lens gasket. Cannot be used in combination with **HL** series Louvers.

Cat. No.

☐ **SL72** Spread Lens

