

**Type:**  
**Job:**  
**Fixture Catalog number:**

**Fixture Options:**

**Approvals:**

Fixture and Finish

Ordered Separately from Fixture  
 See page 2

**Date:**  
**Page: 1 of 2**

## Specifications

**Housing and Lens Frame:** Die-cast brass. Frame with silicone gasket, attaches to housing with four captive 1/4-20 stainless steel, slotted cap screws.

**Arm:** Cast brass. Head is independently rotatable 360° vertically from top dead center. Head may be positioned straight up. Set screw provided for locking position.

**Wall Plate:** Die-cast brass. Attaches to stainless steel plate for mounting to any standard electrical outlet box. Internal set screw provided for locking position.

**Lens:** Tempered clear soda lime glass with silicone gasket. Flush with lens frame to promote water runoff when positioned upward.

**Socket:** G4 to GY6.35 socket for bipin lamp.

**Wiring:** No. 18-2 12 Volt cord.


**Finish:** Natural Brass (**NB**) and Verde Green Patina (**VG**).

**Certification:** UL Listed to U.S. and Canadian safety standards for wet locations. Fixture manufacturer shall employ a quality program that is certified to meet the ISO 9001:2000 standard.

## ORDERING INFORMATION

Fixture*	Finish
<input type="checkbox"/> KLV55NB	Natural Brass
<input type="checkbox"/> KLV55VG	Verde Green Patina
<b>Wattage / Lamp</b>	
<b>50W</b>	
MR16 Bipin Halogen	

\*Remote transformer required.

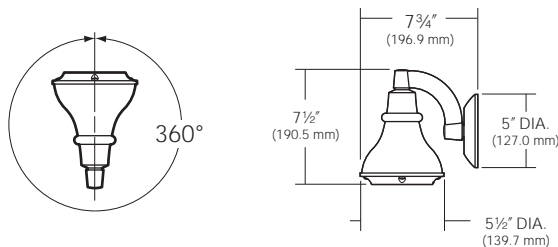

KIM LIGHTING RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.

Type:

Job:

Page: 2 of 2



## Fixture Options

Ordered Separately from Fixture

### Lens Accessories

Cat. No. (See right)

No Option

**HL72 - Hex Cell Louver:** Constructed of hex cell aluminum louvers providing 45° cutoff, mounted in a circular frame, finished in baked high-heat flat black. Can be used in combination with colored lenses. Inserts behind lens into lens gasket. Cannot be used in combination with **SL** spread or **PL** prismatic lenses.



Cat. No.

**HL72** Hex Cell Louver

**PL72 - Prismatic Lens:** Softens lamp distribution and flattens beam spread. Best with flood lamps. Inserts behind lens into lens gasket. Cannot be used in combination with **HL72** louver.



Cat. No.

**PL72** Prismatic Lens

**SL72 - Spread Lens:** Creates an oval beam pattern, more narrow in one beam axis. Best with spot lamps. Inserts behind lens into lens gasket. Cannot be used in combination with **HL72** louver.



Cat. No.

**SL72** Spread Lens