

Type:
Job:
Fixture Catalog number:

Approvals:

Fixture and Finish

Date:
Page: 1 of 1

Specifications

Housing: Die-cast low copper alloy aluminum with clear anodized finish. Two 1/2" NPT in sides. Housing mounts into concrete, brick, or masonry (non-combustible materials). Internal splice area provided behind lamp plate.

Lens Frame: Die-cast aluminum, with silicone gasket, attaches to housing with two captive 10-32 stainless steel, hex socket cap screws.

Lens: Tempered prismatic glass with silicone gasket, concealed above lens frame opening.

Socket: G4 to GY6.35 socket for bipin lamp.

Transformer: Requires remote transformer.


Finish: Each luminaire receives a fade and abrasion resistant, electrostatically applied, thermally cured, triglycidal isocyanurate (TGIC) polyester powdercoat finish. Standard colors are Black (**BL**), Dark Bronze (**DB**), and Verde Green (**GR**).

Certification: UL Listed to U.S. and Canadian safety standards for wet locations.

ORDERING INFORMATION

Fixture ¹	Lamp	Finish
<input type="checkbox"/> KLV800BL	50W T-3 or T-4 Bipin Halogen	Black
<input type="checkbox"/> KLV800DB	50W T-3 or T-4 Bipin Halogen	Dark Bronze
<input type="checkbox"/> KLV800GR	50W T-3 or T-4 Bipin Halogen	Verde Green

¹Remote transformer required.

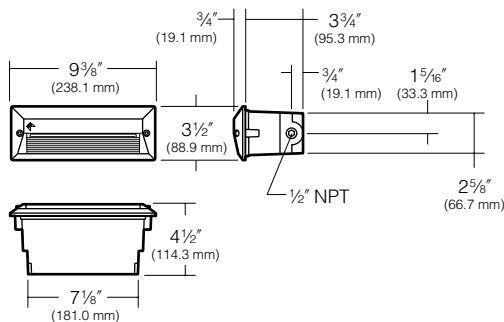

KIM LIGHTING RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.