

**Type:**  
**Job:**  
**Fixture Catalog number:**

**Mounting Options:**

**Approvals:**

Fixture Module and Finish

Hood and Finish

Ordered Separately from Fixture  
See pages 2-3

**Date:**  
**Page: 1 of 3**

## Specifications

**Hood:** Spun aluminum with low copper alloy aluminum die-cast reflector and hinge assembly. The hood is painted to order and the reflector is always painted white. The hood reflector assembly is removable with a no-tool stainless steel lever latch. Hood is available in three styles: Pagoda, Cone, and Mushroom.

**Husk:** Die-cast low copper alloy aluminum with stainless steel hinge / latch assembly.

**Globe:** Fluted glass.


**Stem:** 8" schedule 40 aluminum pipe with 1/2" NPT at bottom plus solid brass locknut for secure mounting.

**Socket:** Porcelain medium base for A-19 60 watt max. incandescent lamp.

**Wiring:** No. 18AWM rated 105°C.

**Finish:** Each luminaire receives a fade and abrasion resistant, electrostatically applied, thermally cured, triglycidal isocyanurate (TGIC) polyester powdercoat finish. Standard colors are Black (**BL**), Dark Bronze (**DB**), and Verde Green (**GR**).

**Certification:** UL Listed to U.S. and Canadian safety standards for wet locations.

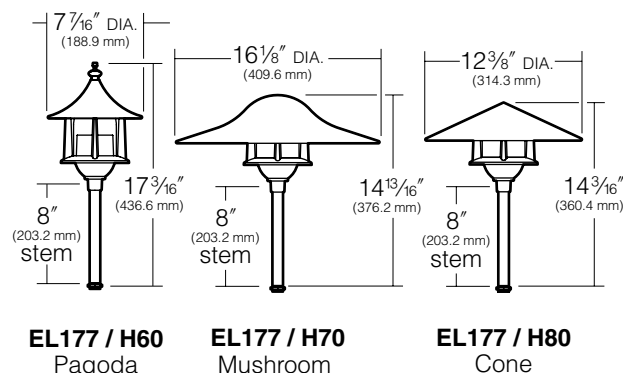

**NOTE:** Fixture modules and hoods may be ordered separately.



## ORDERING INFORMATION

Fixture	Lamp	Finish
<input type="checkbox"/> <b>EL177BL</b>	60W, A19 Incandescent	Alum./ Black
<input type="checkbox"/> <b>EL177DB</b>	60W, A19 Incandescent Bronze	Alum./ Dark
<input type="checkbox"/> <b>EL177GR</b>	60W, A19 Incandescent	Alum./ Verde Green



### Pagoda Hood

### Material / Finish

<input type="checkbox"/> <b>H60BL</b>	Alum. / Black
<input type="checkbox"/> <b>H60DB</b>	Alum. / Dark Bronze
<input type="checkbox"/> <b>H60GR</b>	Alum. / Verde Green



### Mushroom Hood

### Material / Finish



<input type="checkbox"/> <b>H70BL</b>	Alum. / Black
<input type="checkbox"/> <b>H70DB</b>	Alum. / Dark Bronze
<input type="checkbox"/> <b>H70GR</b>	Alum. / Verde Green



### Cone Hood

### Material / Finish

<input type="checkbox"/> <b>H80BL</b>	Alum. / Black
<input type="checkbox"/> <b>H80DB</b>	Alum. / Dark Bronze
<input type="checkbox"/> <b>H80GR</b>	Alum. / Verde Green

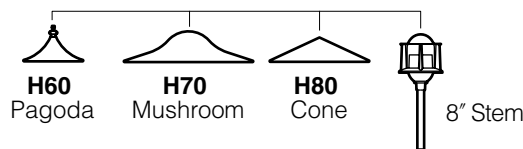


KIM LIGHTING RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.

Type:

Job:

Page: 2 of 3



## Mounting Options

Ordered Separately from Fixture

### Landscape Light Post by Engineered Products Co.

Cat. No.


- ☐ EP17  
☐ No Option

PVC fixture molded in black with 1/2" NPT mount is corrosion free and UV resistant. Replaces EMT, conduit connectors and weatherproof boxes. 100% shatter resistant against denting and cracking. Angled bottom to eliminate cable congestion.

17 1/2" post length

**NOTE:** EP17 should be used with a UL listed fixture and grounding means (i.e., third wire) suitable for use in wet locations.

"x" = required depth of conduit per local codes.

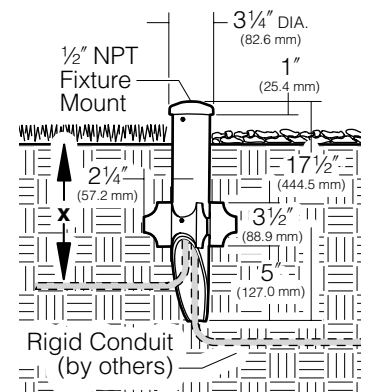

### Architectural Junction Box

Cat. No.

Finish

- ☐ JB1/BL Black  
☐ JB1/DB Dark Bronze  
☐ JB1/GR Verde  
Green  
☐ No Option


Die-cast aluminum with 1/2" NPSM fixture mount. Internal set screw provided for locking position. Two 1/2" NPSM in bottom, 17 cu in. internal volume. Super TGIC powder coat paint over clear anodizing and titanated zirconium conversion coating.

**NOTE:** May also be used to hard mount low voltage fixtures.

#### Application Notes

- Elevates Accent Lights above ground cover to prevent foliage from blocking the light.
- Elevates Path Lights above ground cover to achieve a greater light throw.

**CAUTION:** Junction box must be installed high enough to avoid contact with soil or standing water.




### Portable Spear Mount

Cat. No.

- ☐ J-25N  
☐ No Option

Cast iron with 1/2" NPSM fixture mount. Hot dip galvanized finish. 5.5 cu in. splice compartment. (SJTW-A) 3 wire cord and plug.


9' cord length

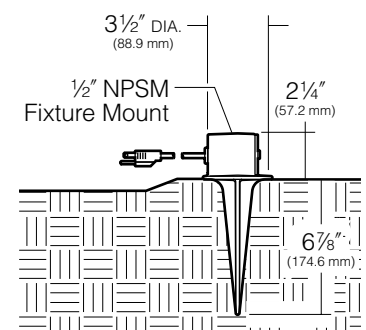

Type:

Job:

Page: 3 of 3



## Mounting Options

Ordered Separately from Fixture

### Brass In-grade Architectural Junction Box

Cat. No.

- ☐ **JBR-2**  
☐ **JBR-3**  
☐ **JBR-21**  
☐ **JBR-24**  
☐ **No Option**

Die-cast brass with 1/2" NPSM fixture mount and die-cast cover. Internal set screw provided for locking position. 18 cu in. internal volume.

- JBR-2** (2) 1/2" NPT in bottom  
**JBR-3** (2) 3/4" NPT in bottom  
**JBR-21** (2) 1/2" NPT in sides, (2) 1/2" NPT in bottom  
**JBR-24** (4) 1/2" NPT in sides, (2) 1/2" NPT in bottom

All side taps provided with plugs.

**NOTE:** May also be used to hard mount low voltage fixtures.


#### 25 Year Limited Warranty:

Solid brass junction boxes are warranted for 25 years, from date of sale, against manufacturing defects and failure due to corrosion.

#### Application Notes

- Creates a flush-mounted appearance.
- May be cast in concrete for increased stability.

**CAUTION:** Fixture stem and swivel must not contact soil or standing water. Provide drainage away from junction box.



### Brass In-grade Staked Junction Box

Cat. No.

- ☐ **JBR30**  
☐ **No Option**

### JBR30 BRASS IN-GRADE STAKED JUNCTION BOX

Die-cast brass with 1/2" NPSM fixture mount and die-cast cover. Internal set screw provided for locking position. 18 cu in. internal volume.

(2) 1/2" NPT in bottom with (2) 19" long brass stakes

**NOTE:** May also be used to hard mount low voltage fixtures.

### JBR32 BRASS IN-GRADE STAKED JUNCTION BOX WITH CORD

### Brass In-grade Staked Junction Box with Cord

Cat. No.

- ☐ **JBR32**  
☐ **No Option**

Die-cast brass with 1/2" NPSM fixture mount and die-cast cover. Internal set screw provided for locking position. 18 cu in. internal volume. (SJTW-A) 3 wire cord and plug.

(2) 19" long brass stakes with 9' cord

#### 25 Year Limited Warranty:

Solid brass junction boxes are warranted for 25 years, from date of sale, against manufacturing defects and failure due to corrosion.

#### Application Notes

- Creates a flush-mounted appearance.
- May be cast in concrete for increased stability.

**CAUTION:** Fixture stem and swivel must not contact soil or standing water. Provide drainage away from junction box.

