

|   |  |  |
|---|--|--|
| <b>Type:</b><br><b>Job:</b><br><b>Fixture Catalog number:</b>   | <b>Mounting Options:</b>                               | <b>Approvals:</b><br><br><b>Date:</b><br><b>Page: 1 of 2</b> |
| <hr/> <div style="display: flex; justify-content: space-between;"> <span>Fixture Module and Finish</span> <span>Hood and Finish</span> </div> | <hr/> Ordered Separately from Fixture<br>See pages 2-3 |  |

## Specifications

**Hood:** Spun aluminum with low copper alloy aluminum die-cast reflector and hinge assembly. The hood is painted to order and the reflector is always painted white. The hood reflector assembly is removable with a no-tool stainless steel lever latch. Hood is available in three styles: Pagoda, Cone, and Mushroom.

**Husk:** Die-cast low copper alloy aluminum with stainless steel hinge / latch assembly.

**Globe:** Fluted glass.

**Stem:** 13" schedule 40 aluminum pipe with 1/2" NPT at bottom plus solid brass locknut for secure mounting.

**Socket:** Porcelain medium base for A-19 60 watt max. incandescent lamp.


**Wiring:** No. 18AWM rated 105°C.

**Finish:** Each luminaire receives a fade and abrasion resistant, electrostatically applied, thermally cured, triglycidal isocyanurate (TGIC) polyester powdercoat finish. Standard colors include **(BL)** Black, **(DB)** Dark Bronze, **(WH)** White, **(PS)** Platinum Silver, **(SG)** Stealth Gray, **(LG)** Light Gray, and **(CC)** Custom Color (Include RAL#).

**Certification:** UL Listed to U.S. and Canadian safety standards for wet locations.

## ORDERING INFORMATION


| Fixture                          | Lamp                  | Finish           |
|----------------------------------|-----------------------|------------------|
| <input type="checkbox"/> EL180BL | 60W, A19 Incandescent | Alum/Black       |
| <input type="checkbox"/> EL180DB | 60W, A19 Incandescent | Alum/Dark Bronze |
| <input type="checkbox"/> EL180GR | 60W, A19 Incandescent | Alum/Verde Green |



### Pagoda Hood

### Material/Finish


|                                |                  |
|--------------------------------|------------------|
| <input type="checkbox"/> H60BL | Alum/Black       |
| <input type="checkbox"/> H60DB | Alum/Dark Bronze |
| <input type="checkbox"/> H60GR | Alum/Verde Green |



### Mushroom Hood

### Material / Finish


|                                |                  |
|--------------------------------|------------------|
| <input type="checkbox"/> H70BL | Alum/Black       |
| <input type="checkbox"/> H70DB | Alum/Dark Bronze |
| <input type="checkbox"/> H70GR | Alum/Verde Green |




### Cone Hood

### Material / Finish

|                                |                  |
|--------------------------------|------------------|
| <input type="checkbox"/> H80BL | Alum/Black       |
| <input type="checkbox"/> H80DB | Alum/Dark Bronze |
| <input type="checkbox"/> H80GR | Alum/Verde Green |

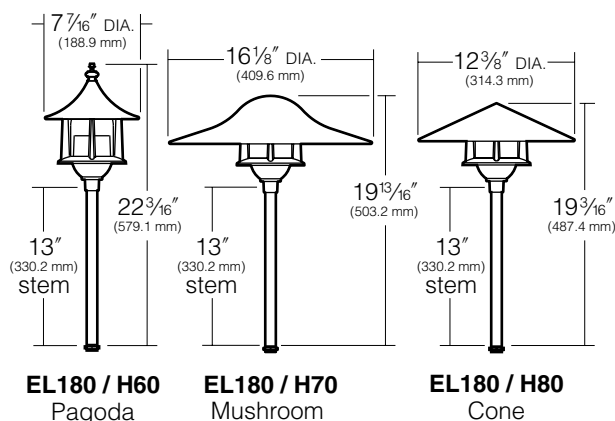**NOTE:** Fixture modules and hoods may be ordered separately.

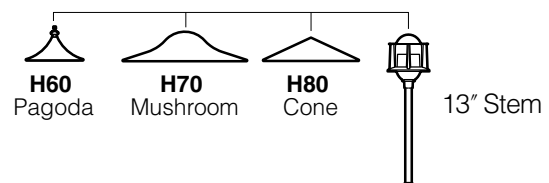


KIM LIGHTING RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.

Type:

Job:

Page: 2 of 2



## Mounting Options

Ordered Separately from Fixture

### Landscape Light Post by Engineered Products Co.

Cat. No.

☐ EP17

☐ No Option

PVC fixture molded in black with 1/2" NPT mount is corrosion free and UV resistant. Replaces EMT, conduit connectors and weatherproof boxes. 17 1/2" post length.

### Architectural Junction Box

Cat. No.      Finish

☐ JB1/BL      Black

☐ JB1/DB      Dark Bronze

☐ JB1/GR      Verde Green

☐ No Option

Die-cast aluminum with 1/2" NPSM fixture mount. Internal set screw provided for locking position. Two 1/2" NPSM in bottom, 17 cu in. internal volume. TGIC powder coat.

### Portable Spear Mount

Cat. No.

☐ J-25N

☐ No Option

Cast iron with 1/2" NPSM fixture mount. Hot dip galvanized finish. 5.5 cu in. splice compartment. (SJTW-A) 3 wire cord and plug. 9' cord length.

### Composite In-grade Architectural Junction Box

Cat. No.

☐ JBR-4

☐ JBR-5

☐ No Option

Composite box with 1/2" NPSM fixture mount and composite cover. Internal set screw provided for locking position. 19 cu in. internal volume.

**JBR-4**    (2) 3/4" NPT knock-outs in bottom  
            (4) 3/4" NPT knock-outs on sides @ 90°

**JBR-5**    Same as above but with brass cover

**NOTE:** May also be used to hard mount low voltage fixtures.

### Brass In-grade Architectural Junction Box

Cat. No.

☐ JBR-2

☐ JBR-3

☐ JBR-21

☐ JBR-24

☐ No Option

Die-cast brass with 1/2" NPSM fixture mount and die-cast cover. Internal set screw provided for locking position. 18 cu in. internal volume.

**JBR-2**    (2) 1/2" NPT in bottom

**JBR-3**    (2) 3/4" NPT in bottom

**JBR-21** (2) 1/2" NPT in sides, (2) 1/2" NPT in bottom

**JBR-24** (4) 1/2" NPT in sides, (2) 1/2" NPT in bottom

All side taps provided with plugs.

### Brass In-grade Junction Box

Cat. No.

☐ JBR30

☐ JBR32

☐ No Option

#### JBR30 BRASS IN-GRADE STAKED JUNCTION BOX

Die-cast brass with 1/2" NPSM fixture mount and die-cast cover. Internal set screw provided for locking position. 18 cu in. internal volume.

(2) 1/2" NPT in bottom with (2) 19" long brass stakes

#### JBR32 BRASS IN-GRADE STAKED JUNCTION BOX WITH CORD

Die-cast brass with 1/2" NPSM fixture mount and die-cast cover. Internal set screw provided for locking position. 18 cu in. internal volume. (SJTW-A) 3 wire cord and plug.

(2) 19" long brass stakes with 9' cord

Go to the link below for more detailed information on mounting options:

[http://www.kimlighting.com/content/products/specs/specs\\_files/kl\\_120vmounting\\_spec.pdf](http://www.kimlighting.com/content/products/specs/specs_files/kl_120vmounting_spec.pdf)