



D-Series LED Bollard



d^{series}

Specifications

Diameter: 8" Round
(20.3 cm)

Height: 42"
(106.7 cm)

Weight (max): 27 lbs
(12.25 kg)



Catalog
Number

Notes

Type

Hit the Tab key or mouse over the page to see all interactive elements.

Introduction

The D-Series LED Bollard is a stylish, energy-saving, long-life solution designed to perform the way a bollard should—with zero uplight. An optical leap forward, this full cut-off luminaire will meet the most stringent of lighting codes. The D-Series LED Bollard's rugged construction, durable finish and long-lasting LEDs will provide years of maintenance-free service.

Ordering Information

EXAMPLE: DSXB LED 16C 700 40K SYM MVOLT DDBXD

DSXB LED															
Series	LEDs	Drive current		Color temperature		Distribution		Voltage	Control options	Other options	Finish <i>(required)</i>				
DSXB LED	Asymmetric 12C 12 LEDs ¹	350	350 mA	30K	3000 K	ASY	Asymmetric ¹	MVOLT ⁵ 120 ⁵ 208 ⁵ 240 ⁵ 277 ⁵ 347 ⁴	Shipped installed PE Photoelectric cell, button type	Shipped installed SF Single fuse (120, 277, 347V) ^{4,7}	DWHXD	White			
		450	450 mA ^{3,4}	40K	4000 K						DNAXD	Natural aluminum			
		530	530 mA	50K	5000 K	SYM	Symmetric ²				DDBXD	Dark bronze			
	Symmetric 16C 16 LEDs ²	700	700 mA	AMBPC Amber phosphor converted					DMG 0-10V dimming driver (no controls)	DF Double fuse (208, 240V) ^{4,7}	DBLXD	Black			
				AMBLW Amber limited wavelength ^{3,4}							H24 24" overall height	DDBTXD	Textured dark bronze		
												ELCW Emergency battery backup ⁶	H30 30" overall height	DBLBXD	Textured black
				H36 36" overall height	DNATXD		Textured natural aluminum								
				FG Ground-fault festoon outlet	L/AB4 4-bolt retrofit base without anchor bolts ⁸		DWHGXD			Textured white					
				L/AB Without anchor bolts											

Accessories

Ordered and shipped separately.

MRAB U Anchor bolts for DSXB⁸

NOTES

- Only available in the 12C, ASY version.
- Only available in the 16C, SYM version.
- Only available with 450 AMBLW version.
- Not available with ELCW.
- MVOLT driver operates on any line voltage from 120-277V (50/60 Hz). Specify 120, 208, 240 or 277 options only when ordering with fusing (SF, DF options), or photocontrol (PE option).
- Not available with 347V. Not available with fusing. Not available with 450 AMBLW.
- Single fuse (SF) requires 120, 277, or 347 voltage option. Double fuse (DF) requires 208 or 240 voltage option.
- MRAB U not available with L/AB4 option.



Performance Data

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Actual performance may differ as a result of end-user environment and application. Actual wattage may differ by +/- 8% when operating between 120-480V +/- 10%.

Light Engines	Drive Current	System Watts	3000 K					4000 K					5000 K					Limited Wavelength Amber				
			Lumens	LPW	B	U	G	Lumens	LPW	B	U	G	Lumens	LPW	B	U	G	Lumens	LPW	B	U	G
Asymmetric (12 LEDs)	350	16	1,194	75	1	0	1	1,283	80	1	0	1	1,291	81	1	0	1					
	530	22	1,719	78	1	0	1	1,847	84	1	0	1	1,859	85	1	0	1					
	700	31	2,173	70	1	0	1	2,335	75	1	0	1	2,349	76	1	0	1					
	Amber 450	16																348	22	1	0	1
Symmetric (16 LEDs)	350	20	1,558	78	1	0	0	1,674	84	1	0	0	1,685	84	1	0	0					
	530	28	2,232	80	2	0	1	2,397	86	2	0	1	2,412	86	2	0	1					
	700	39	2,802	72	2	0	1	3,009	77	2	0	1	3,028	78	2	0	1					
	Amber 450	20																419	21	1	0	1

Note: Available with phosphor-converted amber LED's (nomenclature AMBPC). These LED's produce light with 97+% >530 nm. Output can be calculated by applying a 0.7 factor to 4000 K lumen values and photometric files.

Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the platforms noted in a **25°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	0	25,000	50,000	100,000
Lumen Maintenance Factor	1.00	0.98	0.97	0.95


Electrical Load

Light Engines	Drive Current (mA)	System Watts	Current (A)				
			120	208	240	277	347
12C	350	16W	0.158	0.118	0.114	0.109	0.105
	530	22W	0.217	0.146	0.136	0.128	0.118
	700	31W	0.296	0.185	0.168	0.153	0.139
	Amber 450	16W	0.161	0.120	0.115	0.110	0.106
16C	350	20W	0.197	0.137	0.128	0.121	0.114
	530	28W	0.282	0.178	0.162	0.148	0.135
	700	39W	0.385	0.231	0.207	0.185	0.163
	Amber 450	20W	0.199	0.139	0.130	0.123	0.116

Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit Lithonia Lighting's [D-Series Bollard homepage](#).

Isofootcandle plots for the DSXB LED 700 40K. Distances are in units of mounting height (3').

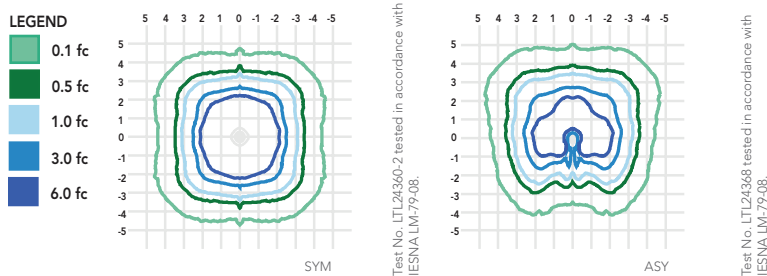

FEATURES & SPECIFICATIONS

INTENDED USE

The rugged construction and maintenance-free performance of the D-Series LED Bollard is ideal for illuminating building entryways, walking paths and pedestrian plazas, as well as any other location requiring a low-mounting-height light source.

CONSTRUCTION

One-piece 8-inch-round extruded aluminum shaft with thick side walls for extreme durability, and die-cast aluminum reflector and top cap. Die-cast aluminum mounting ring allows for easy leveling even in uneven areas and full 360-degree rotation for precise alignment during installation. Three ½" x 11" anchor bolts with double nuts and washers and 3-5/8" max. bolt circle template ensure stability. Overall height is 42" standard.

FINISH

Exterior parts are protected by a zinc-infused super durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering for maximum retention of gloss and luster. A tightly controlled multi-stage process ensures a minimum 3-mil thickness for a finish that can withstand the elements without cracking or peeling. Available in both textured and non-textured finishes.

OPTICS

Two 0% uplight optical distributions are available: symmetrical and asymmetrical. IP66 sealed LED light engine provides smoothly graduated illumination without uplight. Light engines are available in standard 4000 K (>70 CRI) or optional 3000 K (>80 CRI) or 5000 K (67 CRI). Limited-wavelength amber LEDs are also available.

ELECTRICAL

Light engines consist of high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (L95/100,000 hours at 700mA at 25°C). Class 2 electronic drivers are designed for an expected life of 100,000 hours with < 1% failure rate. Electrical components are mounted on a removable power tray.

LISTINGS

CSA certified to U.S. and Canadian standards. Light engines are IP66 rated. Rated for -40°C minimum ambient. Cold-weather emergency battery backup rated for -20°C minimum ambient.

DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.

WARRANTY

Five-year limited warranty. Complete warranty terms located at www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx.

Note: Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.

