

FEATURES & SPECIFICATIONS

INTENDED USE — For walkways, plazas or pedestrian areas.

CONSTRUCTION — Extruded one-piece aluminum, 0.156" wall thickness. Top cover is 0.156" wall cast aluminum. When louvers are used, top is secured to housing with three concealed allen screws. 42" overall height standard. Closed-cell EPDM gasketing is included. Socket is porcelain, vertically oriented, medium-base pulse-rated porcelain socket with copper alloy, nickel-plated shell and center contact.

Finish: Standard finish is dark bronze (DDB) polyester powder, electrostatically applied and oven-cured. Other colors available as options.

OPTICS — Cast-aluminum louvers with gasketed, fluted, glass enclosure.

ELECTRICAL — High power factor standard. 26W and 32W ballasts are Class P, high-frequency, solid-state. Electrical components are tray-mounted with quick-disconnect plug and are accessible through bottom of bollard. Vertically mounted, positive latch thermoplastic socket.

INSTALLATION — Four 1/2" x 11" anchor bolts with double nuts and washers (shipped separately). 4-1/2" bolt circle template included.

LISTINGS — UL listed for wet locations. Listed and labeled to comply with Canadian standards (see Options).

WARRANTY — 1-year limited warranty. Complete warranty terms located at www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Note: Specifications subject to change without notice.

Catalog Number
Notes
Type

Architectural Bollard

KB8

8" Round Compact Fluorescent



KBA



KBC



KBD




KBR

*Weight: 28.0 lbs. (12.7 kgs.)

*Weight as configured in example below.

All dimensions are inches (centimeters) unless otherwise specified.



ORDERING INFORMATION

Lead times will vary depending on options ordered. Consult with your local sales representative.

Example: KBA8 32TRT LV 120 LPI


Series	Wattage	LV		Voltage	Ballast	Options	Finish ²			Lamp ⁴
		Reflector	Louver				(blank)	Dark bronze	Striping ³	
KBA8	26TRT	LV	Louver	120	(blank) Electronic, 0°F	<u>Shipped installed in fixture</u>	(blank)	Dark bronze	<u>Striping³</u>	LPI Lamp included
KBC8	32TRT			277		H24 24" overall height	DBL	Black	SDDB	Dark bronze
KBD8				347		H30 30" overall height	DMB	Medium bronze	SDWH	White
KBR8				MVOLT ¹		H36 36" overall height	DNA	Natural aluminum	SDBL	Black
						FD Festoon outlet	DSS	Sandstone	SDNA	Natural aluminum
						FG Ground-fault festoon outlet	DGC	Charcoal gray	SDTG	Tennis green
						CSA Listed and labeled to comply with Canadian standards (120, 277, 347V only)	<u>Super Durable Finishes</u>			
							DDBXD	Dark bronze	SDBR	Bright red
							DBLXD	Black	SDBUA	Dark blue
							DGCXD	Charcoal gray	SDYLB	Yellow
							DNAXD	Natural aluminum		
							DSSXD	Sandstone		

Notes:


- 1 Multi-volt electronic ballast capable of operating on any line voltage from 120-277V.
- 2 See www.lithonia.com/archcolors for additional color options.
- 3 Striping is available only on KBA8 or KBC8, and only in the colors listed.
- 4 Must be specified.

KB8 8" Round Bollard, Compact Fluorescent

26TRT
1800 Lumens

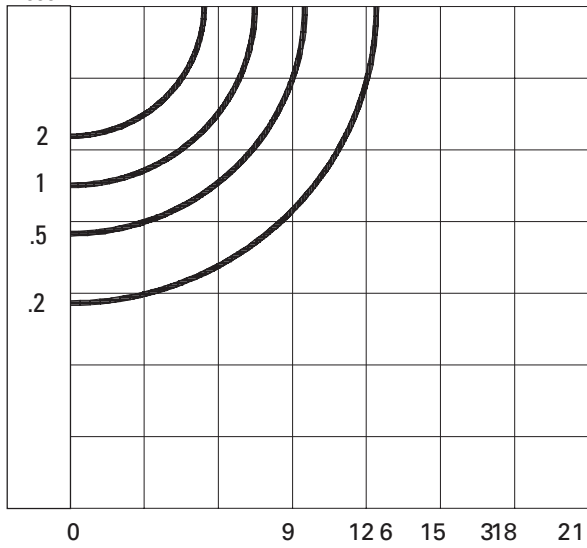

32TRT
2400 Lumens

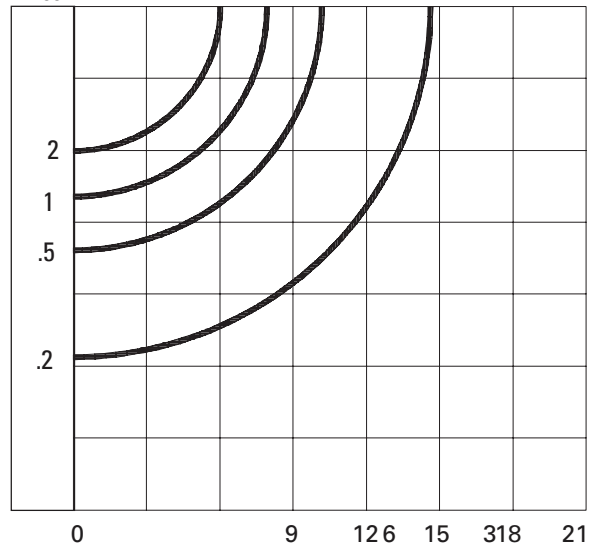

Notes:

- 1 For electrical characteristics, consult outdoor technical data specification sheets on www.lithonia.com.
- 2 Tested to current IES and NEMA standards under stabilized laboratory conditions. Various operating factors can cause differences between laboratory data and actual field measurements. Dimensions and specifications are based on the most current available data and are subject to change.
- 3 Actual performance may differ as a result of end-user environment and application.