



d<sup>series</sup>

# D-Series Size 1

## Legacy LED Area Luminaire




Catalog Number
Notes
Type

Hit the Tab key or mouse over the page to see all interactive elements.

### Specifications

<b>EPA:</b>	1.01 ft <sup>2</sup> (0.09 m <sup>2</sup> )
<b>Length:</b>	33" (83.8 cm)
<b>Width:</b>	13" (33.0 cm)
<b>Height H1:</b>	7-1/2" (19.0 cm)
<b>Height H2:</b>	3-1/2"
<b>Weight (max):</b>	27 lbs (12.2 kg)

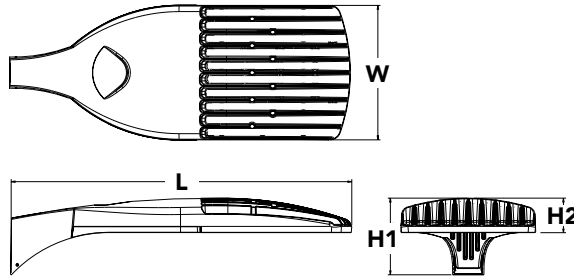

### Introduction

The modern styling of the D-Series is striking yet unobtrusive - making a bold, progressive statement even as it blends seamlessly with its environment. The D-Series distills the benefits of the latest in LED technology into a high performance, high efficacy, long-life luminaire.

The outstanding photometric performance results in sites with excellent uniformity, greater pole spacing and lower power density. It is ideal for replacing up to 750W metal halide in pedestrian and area lighting applications with typical energy savings of 65% and expected service life of over 100,000 hours.

### Ordering Information

**EXAMPLE: DSX1 LED P7 40K T3M MVOLT SPA NLTAIR2 PIRHN DDBXD G1**

Series	LEDs	Color temperature	Distribution	Voltage	Mounting
DSX1 LED	<b>Forward optics</b> P1 P4 <sup>1</sup> P7 <sup>1</sup> P2 P5 <sup>1</sup> P8 P3 P6 <sup>1</sup> P9 <sup>1</sup> <b>Rotated optics</b> P10 <sup>2</sup> P12 <sup>2</sup> P11 <sup>2</sup> P13 <sup>1,2</sup>	30K 3000 K 40K 4000 K 50K 5000 K	T1S Type I short (Automotive) T2S Type II short T2M Type II medium T3S Type III short T3M Type III medium T4M Type IV medium TFTM Forward throw medium T5VS Type V very short <sup>3</sup> T5S Type V short <sup>3</sup> TSM Type V medium <sup>3</sup> TSW Type V wide <sup>3</sup> BLC Backlight control <sup>4</sup> LCCO Left corner cutoff <sup>4</sup> RCCO Right corner cutoff <sup>4</sup>	MVOLT <sup>5</sup> XVOLT (277V-480V) <sup>6,7,8</sup> 120 <sup>9</sup> 208 <sup>9</sup> 240 <sup>9</sup> 277 <sup>9</sup> 347 <sup>9</sup> 480 <sup>9</sup>	<b>Shipped included</b> SPA Square pole mounting RPA Round pole mounting <sup>10</sup> WBA Wall bracket <sup>3</sup> SPUMBA Square pole universal mounting adaptor <sup>11</sup> RPUMBA Round pole universal mounting adaptor <sup>9</sup> <b>Shipped separately</b> KMA8 DDBXD U Mast arm mounting bracket adaptor (specify finish) <sup>12</sup>

Control options	Other options	Finish (required)	Generation (required)
<b>Shipped installed</b> NLTAIR2 nLight AIR generation 2 enabled <sup>13</sup> PIRHN Network, high/low motion/ambient sensor <sup>14</sup> PER NEMA twist-lock receptacle only (controls ordered separately) <sup>15</sup> PER5 Five-pin receptacle only (controls ordered separately) <sup>15,16</sup> PER7 Seven-pin receptacle only (controls ordered separately) <sup>15,16</sup> DMG 0-10v dimming wires pulled outside fixture (for use with an external control, ordered separately) <sup>17</sup> DS Dual switching <sup>18,19,20</sup>	<b>Shipped installed</b> HS House-side shield <sup>23</sup> SF Single fuse (120, 277, 347V) <sup>9</sup> DF Double fuse (208, 240, 480V) <sup>9</sup> L90 Left rotated optics <sup>2</sup> R90 Right rotated optics <sup>2</sup> HA 50°C ambient operations <sup>1</sup> BAA Buy America(n) Act Compliant <b>Shipped separately</b> BS Bird spikes <sup>24</sup> EGS External glare shield	DDBXD Dark bronze DBLXD Black DNAXD Natural aluminum DWHXD White DDBTXD Textured dark bronze DBLBXD Textured black DNATXD Textured natural aluminum DWHGXD Textured white	G1 Generation 1



## Ordering Information

### Accessories

Ordered and shipped separately.

DLL127F 1.5 JU	Photocell - SSL twist-lock (120-277V) <sup>25</sup>
DLL347F 1.5 CUL JU	Photocell - SSL twist-lock (347V) <sup>25</sup>
DLL480F 1.5 CUL JU	Photocell - SSL twist-lock (480V) <sup>25</sup>
DSHORT SBK U	Shorting cap <sup>25</sup>
DSX1HS 30C U G1	House-side shield for P1, P2, P3, P4 and P5 <sup>23</sup>
DSX1HS 40C U G1	House-side shield for P6 and P7 <sup>23</sup>
DSX1HS 60C U G1	House-side shield for P8, P9, P10, P11 and P12 <sup>23</sup>
PUMBA DDBXD U G1*	Square and round pole universal mounting bracket (specify finish) <sup>25</sup>
KMA8 DDBXD U	Mast arm mounting bracket adaptor (specify finish) <sup>12</sup>
DSX1EGS (FINISH) U G1	External glare shield


For more control options, visit [DTL](#) and [ROAM](#) online.

### NOTES

- HA not available with P4, P5, P6, P7, P9 and P13.
- P10, P11, P12 or P13 and rotated optics (L90, R90) only available together.
- Any Type 5 distribution with photocell, is not available with WBA.
- Not available with HS.
- MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).
- XVOLT only suitable for use with P3, P5, P6, P7, P9 and P13.
- XVOLT works with any voltage between 277V and 480V.
- XVOLT not available with fusing (SF or DF) and not available with PIR, PIRH, PIR1FC3V, PIRH1FC3V.
- Single fuse (SF) requires 120V, 277V or 347V. Double fuse (DF) requires 208V, 240V or 480V. XVOLT not available with fusing (SF or DF).
- Suitable for mounting to round poles between 3.5" and 12" diameter.
- Universal mounting brackets intended for retrofit on existing, pre-drilled poles only. 1.5 G vibration load rating per ANCI C136.31. Only usable when pole's drill pattern is NOT Lithonia template #8.
- Must order fixture with SPA option. KMA8 must be ordered as a separate accessory; see Accessories information. For use with 2-3/8" diameter mast arm (not included).
- Must be ordered with PIRHN. Sensor cover available only in dark bronze, black, white and natural aluminum colors.
- Must be ordered with NLTAR2. For more information on nLight Air 2 visit [this link](#).
- Photocell ordered and shipped as a separate line item from Acuity Brands Controls. See accessories. Shorting cap included.
- If ROAM® node required, it must be ordered and shipped as a separate line item from Acuity Brands Controls. Node with integral dimming.
- DMG not available with PIRHN, PER5, PER7, PIR, PIRH, PIR1FC3V or PIRH1FC3V, FAO.
- Provides 50/50 fixture operation via (2) independent drivers. Not available with PER, PER5, PER7, PIR or PIRH. Not available P1, P2, P3, P4 or P5.
- Requires (2) separately switched circuits.
- Reference Controls Options table on page 4.
- Reference Motion Sensor default settings table on page 4 to see functionality.
- Not available with other dimming controls options.
- Not available with BLC, LCCO and RCCO distribution. Also available as a separate accessory; see Accessories information.
- Must be ordered with fixture for factory pre-drilling.
- Requires luminaire to be specified with PER, PER5 or PER7 option. See Control Option Table on page 4.
- For retrofit use only. Only usable when pole's drill pattern is NOT Lithonia template #8.


## Options

### EGS - External Glare Shield

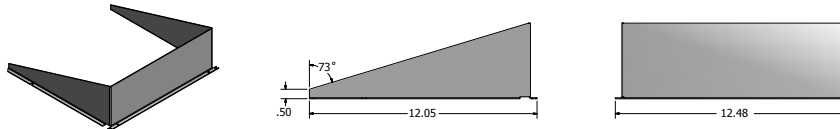

## Drilling

### HANDHOLE ORIENTATION

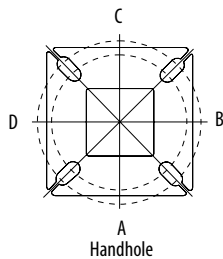

### Tenon Mounting Slipfitter

Tenon O.D.	Mounting	Single Unit	2 @ 180	2 @ 90	3 @ 90	3 @ 120	4 @ 90
2-3/8"	RPA	AS3-5 190	AS3-5 280	AS3-5 290	AS3-5 390	AS3-5 320	AS3-5 490
2-7/8"	RPA	AST25-190	AST25-280	AST25-290	AST25-390	AST25-320	AST25-490
4"	RPA	AST35-190	AST35-280	AST35-290	AST35-390	AST35-320	AST35-490


Mounting Option	Drilling Template	Single	2 @ 180	2 @ 90	3 @ 90	3 @ 120	4 @ 90
Head Location		Side B	Side B & D	Side B & C	Side B, C & D	Round Pole Only	Side A, B, C & D
Drill Nomenclature	#8	DM19AS	DM28AS	DM29AS	DM39AS	DM32AS	DM49AS

### DSX1 Area Luminaire - EPA

\*Includes luminaire and integral mounting arm. Other tenons, arms, brackets or other accessories are not included in this EPA data.

Fixture Quantity & Mounting Configuration	Single DM19	2 @ 180 DM28	2 @ 90 DM29	3 @ 90 DM39	3 @ 120 DM32	4 @ 90 DM49
Mounting Type						
DSX1 LED	1.013	2.025	1.945	3.038	2.850	3.749

	Drilling Template	Minimum Acceptable Outside Pole Dimension					
SPA	#8	2-7/8"	2-7/8"	3.5"	3.5"	3"	3.5"
RPA	#8	2-7/8"	2-7/8"	3.5"	3.5"	3"	3.5"
SPUMBA	#5	2-7/8"	3"	4"	4"	3.5"	4"
RPUMBA	#5	2-7/8"	3.5"	5"	5"	3.5"	5"

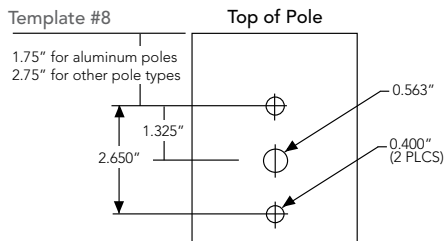


# Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit Lithonia Lighting's [D-Series Area Size 1 homepage](#).


Isofootcandle plots for the DSX1 LED P7 40K G1. Distances are in units of mounting height (25').

### LEGEND


- 0.1 fc
- 0.5 fc
- 1.0 fc

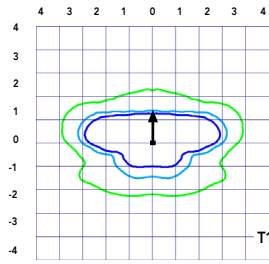


Test No. LT.L23211 tested in accordance with IESNA LM-79-08.

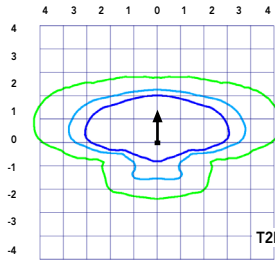


Test No. LT.L23164B tested in accordance with IESNA LM-79-08.

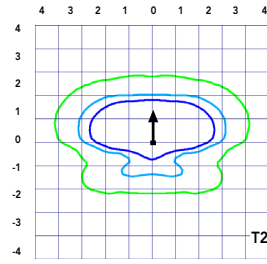


Test No. LT.L23222 tested in accordance with IESNA LM-79-08.

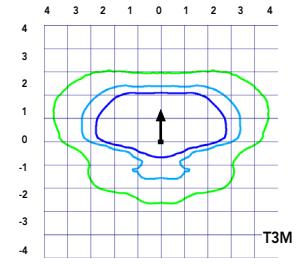


Test No. LT.L23271 tested in accordance with IESNA LM-79-08.

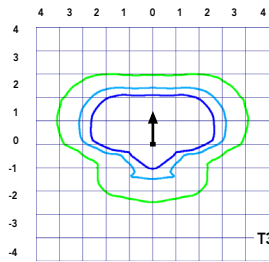


Test No. LT.L23211 tested in accordance with IESNA LM-79-08.

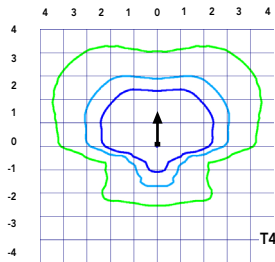


Test No. LT.L23164B tested in accordance with IESNA LM-79-08.

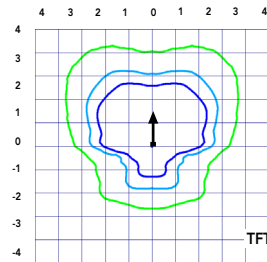


Test No. LT.L23222 tested in accordance with IESNA LM-79-08.

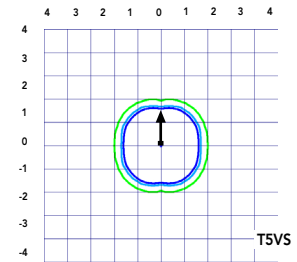


Test No. LT.L23271 tested in accordance with IESNA LM-79-08.

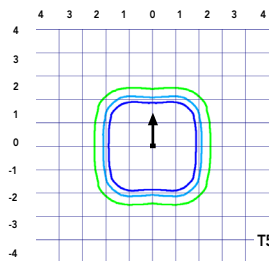


Test No. LT.L23211 tested in accordance with IESNA LM-79-08.

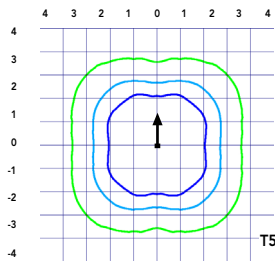


Test No. LT.L23164B tested in accordance with IESNA LM-79-08.

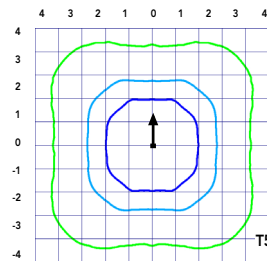


Test No. LT.L23222 tested in accordance with IESNA LM-79-08.

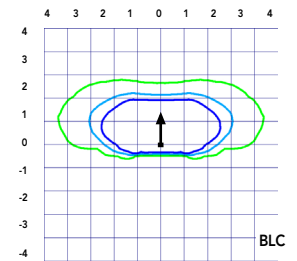

Test No. LT.L23271 tested in accordance with IESNA LM-79-08.

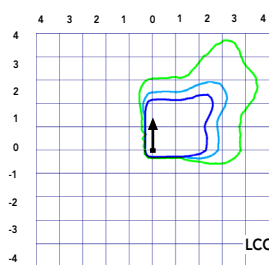

Test No. LT.L23211 tested in accordance with IESNA LM-79-08.

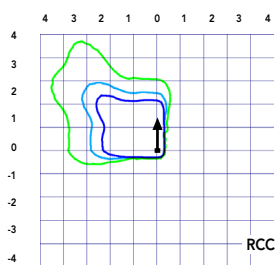

Test No. LT.L23164B tested in accordance with IESNA LM-79-08.

## Performance Data

### Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient		Lumen Multiplier
0°C	32°F	1.04
5°C	41°F	1.04
10°C	50°F	1.03
15°C	59°F	1.02
20°C	68°F	1.01
<b>25°C</b>	<b>77°F</b>	<b>1.00</b>
30°C	86°F	0.99
35°C	95°F	0.98
40°C	104°F	0.97

### Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the platforms noted in a **25°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	Lumen Maintenance Factor
0	1.00
25,000	0.96
50,000	0.92
100,000	0.85

#### Motion Sensor Default Settings

Option	Dimmed State	High Level (when triggered)	Photocell Operation	Dwell Time	Ramp-up Time	Ramp-down Time
PIR or PIRH	3V (37%) Output	10V (100%) Output	Enabled @ 5FC	5 min	3 sec	5 min
*PIR1FC3V or PIRH1FC3V	3V (37%) Output	10V (100%) Output	Enabled @ 1FC	5 min	3 sec	5 min

\*for use when motion sensor is used as dusk to dawn control.

### Electrical Load

	Performance Package	LED Count	Drive Current	Wattage	Current (A)					
					120	208	240	277	347	480
Forward Optics (Non-Rotated)	P1	30	530	54	0.45	0.26	0.23	0.19	0.10	0.12
	P2	30	700	70	0.59	0.34	0.30	0.25	0.20	0.16
	P3	30	1050	102	0.86	0.50	0.44	0.38	0.30	0.22
	P4	30	1250	125	1.06	0.60	0.52	0.46	0.37	0.27
	P5	30	1400	138	1.16	0.67	0.58	0.51	0.40	0.29
	P6	40	1250	163	1.36	0.78	0.68	0.59	0.47	0.34
	P7	40	1400	183	1.53	0.88	0.76	0.66	0.53	0.38
	P8	60	1050	207	1.74	0.98	0.87	0.76	0.64	0.49
	P9	60	1250	241	2.01	1.16	1.01	0.89	0.70	0.51
Rotated Optics (Requires L90 or R90)	P10	60	530	106	0.90	0.52	0.47	0.43	0.33	0.27
	P11	60	700	137	1.15	0.67	0.60	0.53	0.42	0.32
	P12	60	1050	207	1.74	0.99	0.87	0.76	0.60	0.46
	P13	60	1250	231	1.93	1.12	0.97	0.86	0.67	0.49

#### Controls Options

Nomenclature	Description	Functionality	Primary control device	Notes
FA0	Field adjustable output device installed inside the luminaire; wired to the driver dimming leads.	Allows the luminaire to be manually dimmed, effectively trimming the light output.	FA0 device	Cannot be used with other controls options that need the 0-10V leads
DS	Drivers wired independently for 50/50 luminaire operation	The luminaire is wired to two separate circuits, allowing for 50/50 operation.	Independently wired drivers	Requires two separately switched circuits. Consider nLight AIR as a more cost effective alternative.
PERS or PER7	Twist-lock photocell receptacle	Compatible with standard twist-lock photocells for dusk to dawn operation, or advanced control nodes that provide 0-10V dimming signals.	Twist-lock photocells such as DLL Elite or advanced control nodes such as ROAM.	Pins 4 & 5 to dimming leads on driver, Pins 6 & 7 are capped inside luminaire
PIR or PIRH	Motion sensors with integral photocell. PIR for 8-15' mounting; PIRH for 15-30' mounting	Luminaires dim when no occupancy is detected.	Acuity Controls SBGR	Also available with PIRH1FC3V when the sensor photocell is used for dusk-to-dawn operation.
NLTAIR2 PIRHN	nLight AIR enabled luminaire for motion sensing, photocell and wireless communication.	Motion and ambient light sensing with group response. Scheduled dimming with motion sensor over-ride when wirelessly connected to the nLight Eclipse.	nLight Air rSDGR	nLight AIR sensors can be programmed and commissioned from the ground using the CIAIRity Pro app.

**Lumen Output**

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08.

Forward Optics																							
LED Count	Drive Current	Power Package	System Watts	Dist. Type	30K (3000 K, 70 CRI)					40K (4000 K, 70 CRI)					50K (5000 K, 70 CRI)								
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW				
30	530	P1	54W	T1S	6,457	2	0	2	120	6,956	2	0	2	129	7,044	2	0	2	130				
				T2S	6,483	1	0	1	120	6,984	2	0	2	129	7,072	2	0	2	131				
				T2M	6,450	2	0	2	119	6,948	2	0	2	129	7,036	2	0	2	130				
				T3S	6,468	1	0	2	120	6,967	1	0	2	129	7,055	1	0	2	131				
				T3M	6,279	2	0	2	116	6,764	2	0	2	125	6,849	2	0	2	127				
				T4M	6,327	1	0	2	117	6,816	1	0	2	126	6,902	1	0	2	128				
				TFTM	6,464	1	0	2	120	6,963	1	0	2	129	7,051	1	0	2	131				
				TSVS	6,722	2	0	0	124	7,242	3	0	0	134	7,334	3	0	0	136				
				TSS	6,728	2	0	1	125	7,248	2	0	1	134	7,340	2	0	1	136				
				TSM	6,711	3	0	1	124	7,229	3	0	1	134	7,321	3	0	2	136				
				TSW	6,667	3	0	2	123	7,182	3	0	2	133	7,273	3	0	2	135				
				BLC	5,299	1	0	1	98	5,709	1	0	2	106	5,781	1	0	2	107				
				LCCO	3,943	1	0	2	73	4,248	1	0	2	79	4,302	1	0	2	80				
				RCCO	3,943	1	0	2	73	4,248	1	0	2	79	4,302	1	0	2	80				
				30	700	P2	70W	T1S	8,249	2	0	2	118	8,886	2	0	2	127	8,999	2	0	2	129
								T2S	8,282	2	0	2	118	8,923	2	0	2	127	9,035	2	0	2	129
T2M	8,240	2	0					2	118	8,877	2	0	2	127	8,989	2	0	2	128				
T3S	8,262	2	0					2	118	8,901	2	0	2	127	9,013	2	0	2	129				
T3M	8,021	2	0					2	115	8,641	2	0	2	123	8,750	2	0	2	125				
T4M	8,083	2	0					2	115	8,708	2	0	2	124	8,818	2	0	2	126				
TFTM	8,257	2	0					2	118	8,896	2	0	2	127	9,008	2	0	2	129				
TSVS	8,588	3	0					0	123	9,252	3	0	0	132	9,369	3	0	0	134				
TSS	8,595	3	0					1	123	9,259	3	0	1	132	9,376	3	0	1	134				
TSM	8,573	3	0					2	122	9,236	3	0	2	132	9,353	3	0	2	134				
TSW	8,517	3	0					2	122	9,175	4	0	2	131	9,291	4	0	2	133				
BLC	6,770	1	0					2	97	7,293	1	0	2	104	7,386	1	0	2	106				
LCCO	5,038	1	0					2	72	5,427	1	0	2	78	5,496	1	0	2	79				
RCCO	5,038	1	0					2	72	5,427	1	0	2	78	5,496	1	0	2	79				
30	1050	P3	102W					T1S	11,661	2	0	2	114	12,562	3	0	3	123	12,721	3	0	3	125
								T2S	11,708	2	0	2	115	12,612	2	0	2	124	12,772	2	0	2	125
				T2M	11,648	2	0	2	114	12,548	3	0	3	123	12,707	3	0	3	125				
				T3S	11,679	2	0	2	115	12,582	2	0	2	123	12,741	2	0	2	125				
				T3M	11,338	2	0	2	111	12,214	3	0	3	120	12,369	3	0	3	121				
				T4M	11,426	2	0	3	112	12,309	2	0	3	121	12,465	2	0	3	122				
				TFTM	11,673	2	0	2	114	12,575	2	0	3	123	12,734	2	0	3	125				
				TSVS	12,140	3	0	1	119	13,078	3	0	1	128	13,244	3	0	1	130				
				TSS	12,150	3	0	1	119	13,089	3	0	1	128	13,254	3	0	1	130				
				TSM	12,119	4	0	2	119	13,056	4	0	2	128	13,221	4	0	2	130				
				TSW	12,040	4	0	3	118	12,970	4	0	3	127	13,134	4	0	3	129				
				BLC	9,570	1	0	2	94	10,310	1	0	2	101	10,440	1	0	2	102				
				LCCO	7,121	1	0	3	70	7,671	1	0	3	75	7,768	1	0	3	76				
				RCCO	7,121	1	0	3	70	7,671	1	0	3	75	7,768	1	0	3	76				
				30	1250	P4	125W	T1S	13,435	3	0	3	107	14,473	3	0	3	116	14,657	3	0	3	117
								T2S	13,489	2	0	2	108	14,532	3	0	3	116	14,716	3	0	3	118
T2M	13,420	3	0					3	107	14,457	3	0	3	116	14,640	3	0	3	117				
T3S	13,457	2	0					2	108	14,496	2	0	2	116	14,680	2	0	2	117				
T3M	13,064	3	0					3	105	14,073	3	0	3	113	14,251	3	0	3	114				
T4M	13,165	2	0					3	105	14,182	2	0	3	113	14,362	2	0	3	115				
TFTM	13,449	2	0					3	108	14,488	2	0	3	116	14,672	2	0	3	117				
TSVS	13,987	4	0					1	112	15,068	4	0	1	121	15,259	4	0	1	122				
TSS	13,999	3	0					1	112	15,080	3	0	1	121	15,271	3	0	1	122				
TSM	13,963	4	0					2	112	15,042	4	0	2	120	15,233	4	0	2	122				
TSW	13,872	4	0					3	111	14,944	4	0	3	120	15,133	4	0	3	121				
BLC	11,027	1	0					2	88	11,879	1	0	2	95	12,029	1	0	2	96				
LCCO	8,205	1	0					3	66	8,839	1	0	3	71	8,951	1	0	3	72				
RCCO	8,205	1	0					3	66	8,839	1	0	3	71	8,951	1	0	3	72				
30	1400	P5	138W					T1S	14,679	3	0	3	106	15,814	3	0	3	115	16,014	3	0	3	116
								T2S	14,739	3	0	3	107	15,878	3	0	3	115	16,079	3	0	3	117
				T2M	14,663	3	0	3	106	15,796	3	0	3	114	15,996	3	0	3	116				
				T3S	14,703	2	0	3	107	15,839	3	0	3	115	16,039	3	0	3	116				
				T3M	14,274	3	0	3	103	15,377	3	0	3	111	15,571	3	0	3	113				
				T4M	14,384	2	0	3	104	15,496	3	0	3	112	15,692	3	0	3	114				
				TFTM	14,695	2	0	3	106	15,830	3	0	3	115	16,030	3	0	3	116				
				TSVS	15,283	4	0	1	111	16,464	4	0	1	119	16,672	4	0	1	121				
				TSS	15,295	3	0	1	111	16,477	4	0	1	119	16,686	4	0	1	121				
				TSM	15,257	4	0	2	111	16,435	4	0	2	119	16,644	4	0	2	121				
				TSW	15,157	4	0	3	110	16,328	4	0	3	118	16,534	4	0	3	120				
				BLC	12,048	1	0	2	87	12,979	1	0	2	94	13,143	1	0	2	95				
				LCCO	8,965	1	0	3	65	9,657	1	0	3	70	9,780	1	0	3	71				
				RCCO	8,965	1	0	3	65	9,657	1	0	3	70	9,780	1	0	3	71				

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

Forward Optics																			
LED Count	Drive Current	Power Package	System Watts	Dist. Type	30K (3000 K, 70 CRI)					40K (4000 K, 70 CRI)					50K (5000 K, 70 CRI)				
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
40	1250	P6	163W	T1S	17,654	3	0	3	108	19,018	3	0	3	117	19,259	3	0	3	118
				T2S	17,725	3	0	3	109	19,095	3	0	3	117	19,336	3	0	3	119
				T2M	17,634	3	0	3	108	18,997	3	0	3	117	19,237	3	0	3	118
				T3S	17,682	3	0	3	108	19,048	3	0	3	117	19,289	3	0	3	118
				T3M	17,166	3	0	3	105	18,492	3	0	3	113	18,726	3	0	3	115
				T4M	17,299	3	0	3	106	18,635	3	0	4	114	18,871	3	0	4	116
				TFTM	17,672	3	0	3	108	19,038	3	0	4	117	19,279	3	0	4	118
				TSVS	18,379	4	0	1	113	19,800	4	0	1	121	20,050	4	0	1	123
				T5S	18,394	4	0	2	113	19,816	4	0	2	122	20,066	4	0	2	123
				T5M	18,348	4	0	2	113	19,766	4	0	2	121	20,016	4	0	2	123
				TSW	18,228	5	0	3	112	19,636	5	0	3	120	19,885	5	0	3	122
				BLC	14,489	2	0	2	89	15,609	2	0	3	96	15,806	2	0	3	97
				LCCO	10,781	1	0	3	66	11,614	1	0	3	71	11,761	2	0	3	72
				RCCO	10,781	1	0	3	66	11,614	1	0	3	71	11,761	2	0	3	72
40	1400	P7	183W	T1S	19,227	3	0	3	105	20,712	3	0	3	113	20,975	3	0	3	115
				T2S	19,304	3	0	3	105	20,796	3	0	3	114	21,059	3	0	3	115
				T2M	19,205	3	0	3	105	20,689	3	0	3	113	20,951	3	0	3	114
				T3S	19,257	3	0	3	105	20,745	3	0	3	113	21,008	3	0	3	115
				T3M	18,695	3	0	3	102	20,140	3	0	3	110	20,395	3	0	4	111
				T4M	18,840	3	0	4	103	20,296	3	0	4	111	20,553	3	0	4	112
				TFTM	19,246	3	0	4	105	20,734	3	0	4	113	20,996	3	0	4	115
				TSVS	20,017	4	0	1	109	21,564	4	0	1	118	21,837	4	0	1	119
				T5S	20,033	4	0	2	109	21,581	4	0	2	118	21,854	4	0	2	119
				T5M	19,983	4	0	2	109	21,527	5	0	3	118	21,799	5	0	3	119
				TSW	19,852	5	0	3	108	21,386	5	0	3	117	21,656	5	0	3	118
				BLC	15,780	2	0	3	86	16,999	2	0	3	93	17,214	2	0	3	94
				LCCO	11,742	2	0	3	64	12,649	2	0	3	69	12,809	2	0	3	70
				RCCO	11,742	2	0	3	64	12,649	2	0	3	69	12,809	2	0	3	70
60	1050	P8	207W	T1S	22,490	3	0	3	109	24,228	3	0	3	117	24,535	3	0	3	119
				T2S	22,581	3	0	3	109	24,326	3	0	3	118	24,634	3	0	3	119
				T2M	22,465	3	0	4	109	24,201	3	0	4	117	24,507	3	0	4	119
				T3S	22,526	3	0	4	109	24,267	3	0	4	117	24,574	3	0	4	119
				T3M	21,869	3	0	4	106	23,558	3	0	4	114	23,857	3	0	4	115
				T4M	22,038	3	0	4	106	23,741	3	0	4	115	24,041	3	0	4	116
				TFTM	22,513	3	0	4	109	24,253	3	0	4	117	24,560	3	0	4	119
				TSVS	23,415	5	0	1	113	25,224	5	0	1	122	25,543	5	0	1	123
				T5S	23,434	4	0	2	113	25,244	4	0	2	122	25,564	4	0	2	123
				T5M	23,374	5	0	3	113	25,181	5	0	3	122	25,499	5	0	3	123
				TSW	23,221	5	0	4	112	25,016	5	0	4	121	25,332	5	0	4	122
				BLC	18,458	2	0	3	89	19,885	2	0	3	96	20,136	2	0	3	97
				LCCO	13,735	2	0	3	66	14,796	2	0	4	71	14,983	2	0	4	72
				RCCO	13,735	2	0	3	66	14,796	2	0	4	71	14,983	2	0	4	72
60	1250	P9	241W	T1S	25,575	3	0	3	106	27,551	3	0	3	114	27,900	3	0	3	116
				T2S	25,678	3	0	3	107	27,663	3	0	3	115	28,013	3	0	3	116
				T2M	25,547	3	0	4	106	27,521	3	0	4	114	27,869	3	0	4	116
				T3S	25,616	3	0	4	106	26,791	3	0	4	111	27,945	3	0	4	116
				T3M	24,868	3	0	4	103	27,597	3	0	4	115	27,129	3	0	4	113
				T4M	25,061	3	0	4	104	26,997	3	0	4	112	27,339	3	0	4	113
				TFTM	25,602	3	0	4	106	27,580	3	0	4	114	27,929	3	0	4	116
				TSVS	26,626	5	0	1	110	28,684	5	0	1	119	29,047	5	0	1	121
				T5S	26,648	4	0	2	111	28,707	5	0	2	119	29,070	5	0	2	121
				T5M	26,581	5	0	3	110	28,635	5	0	3	119	28,997	5	0	3	120
				TSW	26,406	5	0	4	110	28,447	5	0	4	118	28,807	5	0	4	120
				BLC	20,990	2	0	3	87	22,612	2	0	3	94	22,898	2	0	3	95
				LCCO	15,619	2	0	4	65	16,825	2	0	4	70	17,038	2	0	4	71
				RCCO	15,619	2	0	4	65	16,825	2	0	4	70	17,038	2	0	4	71

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

Rotated Optics																							
LED Count	Drive Current	Power Package	System Watts	Dist. Type	30K (3000 K, 70 CRI)					40K (4000 K, 70 CRI)					50K (5000 K, 70 CRI)								
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW				
60	530	P10	106W	T1S	13,042	3	0	3	123	14,050	3	0	3	133	14,228	3	0	3	134				
				T2S	13,200	3	0	3	125	14,220	3	0	3	134	14,400	3	0	3	136				
				T2M	12,966	4	0	4	122	13,968	4	0	4	132	14,145	4	0	4	133				
				T3S	13,193	4	0	4	124	14,212	4	0	4	134	14,392	4	0	4	136				
				T3M	12,766	4	0	4	120	13,751	4	0	4	130	13,925	4	0	4	131				
				T4M	12,944	4	0	4	122	13,945	4	0	4	132	14,121	4	0	4	133				
				TFTM	13,279	4	0	4	125	14,305	4	0	4	135	14,486	4	0	4	137				
				TSVS	13,372	3	0	1	126	14,405	4	0	1	136	14,588	4	0	1	138				
				T5S	13,260	3	0	1	125	14,284	3	0	1	135	14,465	3	0	1	136				
				T5M	13,256	4	0	2	125	14,281	4	0	2	135	14,462	4	0	2	136				
				TSW	13,137	4	0	3	124	14,153	4	0	3	134	14,332	4	0	3	135				
				BLC	10,906	3	0	3	103	11,749	3	0	3	111	11,898	3	0	3	112				
				LCCO	7,789	1	0	3	73	8,391	1	0	3	79	8,497	1	0	3	80				
				RCCO	7,779	4	0	4	73	8,380	4	0	4	79	8,486	4	0	4	80				
				60	700	P11	137W	T1S	16,556	3	0	3	121	17,835	3	0	3	130	18,061	4	0	4	132
								T2S	16,757	4	0	4	122	18,052	4	0	4	132	18,280	4	0	4	133
T2M	16,460	4	0					4	120	17,732	4	0	4	129	17,956	4	0	4	131				
T3S	16,747	4	0					4	122	18,041	4	0	4	132	18,270	4	0	4	133				
T3M	16,204	4	0					4	118	17,456	4	0	4	127	17,677	4	0	4	129				
T4M	16,432	4	0					4	120	17,702	4	0	4	129	17,926	4	0	4	131				
TFTM	16,857	4	0					4	123	18,159	4	0	4	133	18,389	4	0	4	134				
TSVS	16,975	4	0					1	124	18,287	4	0	1	133	18,518	4	0	1	135				
T5S	16,832	4	0					1	123	18,133	4	0	2	132	18,362	4	0	2	134				
T5M	16,828	4	0					2	123	18,128	4	0	2	132	18,358	4	0	2	134				
TSW	16,677	4	0					3	122	17,966	5	0	3	131	18,193	5	0	3	133				
BLC	13,845	3	0					3	101	14,915	3	0	3	109	15,103	3	0	3	110				
LCCO	9,888	1	0					3	72	10,652	2	0	3	78	10,787	2	0	3	79				
RCCO	9,875	4	0					4	72	10,638	4	0	4	78	10,773	4	0	4	79				
60	1050	P12	207W					T1S	22,996	4	0	4	111	24,773	4	0	4	120	25,087	4	0	4	121
								T2S	23,276	4	0	4	112	25,074	4	0	4	121	25,392	4	0	4	123
				T2M	22,863	4	0	4	110	24,630	5	0	5	119	24,941	5	0	5	120				
				T3S	23,262	4	0	4	112	25,060	4	0	4	121	25,377	4	0	4	123				
				T3M	22,508	4	0	4	109	24,247	5	0	5	121	24,554	5	0	5	119				
				T4M	22,824	5	0	5	110	24,588	5	0	5	119	24,899	5	0	5	120				
				TFTM	23,414	5	0	5	113	25,223	5	0	5	122	25,543	5	0	5	123				
				TSVS	23,579	5	0	1	114	25,401	5	0	1	123	25,722	5	0	1	124				
				T5S	23,380	4	0	2	113	25,187	4	0	2	122	25,506	4	0	2	123				
				T5M	23,374	5	0	3	113	25,181	5	0	3	122	25,499	5	0	3	123				
				TSW	23,165	5	0	4	112	24,955	5	0	4	121	25,271	5	0	4	122				
				BLC	19,231	4	0	4	93	20,717	4	0	4	100	20,979	4	0	4	101				
				LCCO	13,734	2	0	3	66	14,796	2	0	4	71	14,983	2	0	4	72				
				RCCO	13,716	4	0	4	66	14,776	4	0	4	71	14,963	4	0	4	72				
				60	1250	P13	231W	T1S	25,400	4	0	4	110	27,363	4	0	4	118	27,709	4	0	4	120
								T2S	25,709	4	0	4	111	27,695	4	0	4	120	28,046	4	0	4	121
T2M	25,253	5	0					5	109	27,204	5	0	5	118	27,548	5	0	5	119				
T3S	25,694	5	0					5	111	27,679	5	0	5	120	28,029	5	0	5	121				
T3M	24,861	5	0					5	108	26,782	5	0	5	116	27,121	5	0	5	117				
T4M	25,210	5	0					5	109	27,158	5	0	5	118	27,502	5	0	5	119				
TFTM	25,861	5	0					5	112	27,860	5	0	5	121	28,212	5	0	5	122				
TSVS	26,043	5	0					1	113	28,056	5	0	1	121	28,411	5	0	1	123				
T5S	25,824	4	0					2	112	27,819	5	0	2	120	28,172	5	0	2	122				
T5M	25,818	5	0					3	112	27,813	5	0	3	120	28,165	5	0	3	122				
TSW	25,586	5	0					4	111	27,563	5	0	4	119	27,912	5	0	4	121				
BLC	21,241	4	0					4	92	22,882	4	0	4	99	23,172	4	0	4	100				
LCCO	15,170	2	0					4	66	16,342	2	0	4	71	16,549	2	0	4	72				
RCCO	15,150	5	0					5	66	16,321	5	0	5	71	16,527	5	0	5	72				

## FEATURES & SPECIFICATIONS

### INTENDED USE

The sleek design of the D-Series Size 1 reflects the embedded high performance LED technology. It is ideal for many commercial and municipal applications, such as parking lots, plazas, campuses, and streetscapes.

### CONSTRUCTION

Single-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance and future light engine upgrades. The LED drivers are mounted in direct contact with the casting to promote low operating temperature and long life. Housing is completely sealed against moisture and environmental contaminants (IP65). Low EPA (1.01 ft<sup>2</sup>) for optimized pole wind loading.

### FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in both textured and non-textured finishes.

### OPTICS

Precision-molded proprietary acrylic lenses are engineered for superior area lighting distribution, uniformity, and pole spacing. Light engines are available in standard 3000 K, 4000 K and 5000 K (70 CRI) configurations. The D-Series Size 1 has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

### ELECTRICAL

Light engine configurations consist of high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (up to L85/100,000 hours at 25°C). Class 1 electronic drivers are designed to have a power factor >90%, THD <20%, and an expected life of 100,000 hours with <1% failure rate. Easily serviceable 10kV surge protection device meets a minimum Category C Low operation (per ANSI/IEEE C62.41.2).

### STANDARD CONTROLS

The DSX1 LED area luminaire has a number of control options. DSX Size 1, comes standard with 0-10V dimming drivers. Dusk to dawn controls can be utilized via optional NEMA twist-lock photocell receptacles. Integrated motion sensors with on-board photocells feature field-adjustable programming and are suitable for mounting heights up to 30 feet.

### nLIGHT AIR CONTROLS

The DSX1 LED area luminaire is also available with nLight® AIR for the ultimate in wireless control. This powerful controls platform provides out-of-the-box basic motion sensing and photocontrol functionality and is suitable for mounting heights up to 40 feet. Once commissioned using a smartphone and the easy-to-use CLAIRITY app, nLight AIR equipped luminaires can be grouped, resulting in motion sensor and photocell group response without the need for additional equipment. Scheduled dimming with motion sensor over-ride can be achieved when used with the nLight Eclipse. Additional information about nLight Air can be found [here](#).

### INSTALLATION

Included mounting block and integral arm facilitate quick and easy installation. Stainless steel bolts fasten the mounting block securely to poles and walls, enabling the D-Series Size 1 to withstand up to a 3.0 G vibration load rating per ANSI C136.31. The D-Series Size 1 utilizes the AERIS™ series pole drilling pattern (template #8). NEMA photocontrol receptacle are also available.

### LISTINGS

UL listed to meet U.S. and Canadian standards. UL Listed for wet locations. Light engines are IP66 rated; luminaire is IP65 rated. Rated for -40°C minimum ambient. U.S. Patent No. D672,492 S. International patent pending.

DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified.

International Dark-Sky Association (IDA) Fixture Seal of Approval (FSA) is available for all products on this page utilizing 3000K color temperature only.

### BUY AMERICAN

Product with the BAA option is assembled in the USA and meets the Buy America(n) government procurement requirements under FAR, DFARS and DOT. Please refer to [www.acuitybrands.com/buy-american](http://www.acuitybrands.com/buy-american) for additional information.

### WARRANTY

5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: [www.acuitybrands.com/support/customer-support/terms-and-conditions](http://www.acuitybrands.com/support/customer-support/terms-and-conditions)

**Note:** Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.

