

## FEATURES & SPECIFICATIONS

### INTENDED USE

Provides general illumination in commercial and residential applications. Ideal for use in closets, foyers, hallways, corridors, living rooms, bedrooms, offices, stairways and more.

### CONSTRUCTION

Features a matte white acrylic diffuser with polished chrome center accent and white metal housing.

### OPTICS

Produces approximately 1400 lumens at 50,000 hours of life.

### ELECTRICAL

Fixture operates at 120 volts, 60Hz. Standard input = 24 watts, 60 lumens per watt.

Works with most standard incandescent dimmers (see list of approved dimmers).

### INSTALLATION

All mounting hardware included for mounting to a standard junction box.

### LISTINGS

UL Listed to US and Canadian standards and suitable for damp locations. ENERGY STAR® certified.

### WARRANTY

5-year limited warranty. Complete warranty terms located at

[www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx)

NOTE: Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25°C.

Specifications subject to change without notice.

Catalog Number
Notes
Type

Decorative Indoor

# Kamino LED Flush Mount






### Specifications

Depth: 3-1/2 (8.9)

Diameter/Width: 13-7/8 (35.2)

Weight: 1.5 lbs.

All dimensions are inches (centimeters) unless otherwise indicated.



### ORDERING INFORMATION

For shortest lead times, configure product using **bolded options**.

**Example:** FMKMRL 14 20830 KR

Series	Module/CRI	Color temperature	Finish
<b>FMKMRL 14</b> 14" Round LED flush mount	<b>208</b> >80	<b>40</b> 4000K	<b>KR</b> Chrome
<b>FMKMSL 14</b> 14" Square LED flush mount		35 3500K <sup>1</sup>	
		30 3000K	
		27 2700K <sup>1</sup>	

### Replacement Parts: Order as separate catalog number.

DFMKMRL 14	14" round acrylic diffuser
DFMKMSL 14	14" square acrylic diffuser

### Notes

<sup>1</sup> Minimum 90-day lead time for non-standard color temperatures; minimum 50 order quantity.

LED Flush Mount Kamino

LIGHTING FACTS

LED

lighting facts®

A Program of the U.S. DOE

Light Output (Lumens)

Watts

Lumens per Watt (Efficacy)

1588

23

69

Color Accuracy

Color Rendering Index (CRI)

84

Light Color

Correlated Color Temperature (CCT)

3000 (Bright White)

2700K

3000K

4500K

6500K

Warm White

Bright White

Daylight

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the Label Reference Guide.

Registration Number: NLSBA-26C300 (7/16/2014)

Model Number: FMKMRL 14 20830

Type: Luminaire - Decorative

LED

lighting facts®

A Program of the U.S. DOE

Light Output (Lumens)

Watts

Lumens per Watt (Efficacy)

1680

23

73

Color Accuracy

Color Rendering Index (CRI)

85

Light Color

Correlated Color Temperature (CCT)

4000 (Bright White)

2700K

3000K

4500K

6500K

Warm White

Bright White

Daylight

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the Label Reference Guide.

Registration Number: NLSBA-MNARV (6/16/2014)

Model Number: FMKMRL 14 20840

Type: Luminaire - Decorative

LED

lighting facts®

A Program of the U.S. DOE

Light Output (Lumens)

Watts

Lumens per Watt (Efficacy)

1588

23

69

Color Accuracy

Color Rendering Index (CRI)

84

Light Color

Correlated Color Temperature (CCT)

3000 (Bright White)

2700K

3000K

4500K

6500K

Warm White

Bright White

Daylight

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the Label Reference Guide.

Registration Number: NLSBA-XNNZLC (8/16/2014)

Model Number: FMKMRL 14 20830

Type: Luminaire - Decorative

LED

lighting facts®

A Program of the U.S. DOE

Light Output (Lumens)

Watts

Lumens per Watt (Efficacy)

1680

23

73

Color Accuracy

Color Rendering Index (CRI)

85

Light Color

Correlated Color Temperature (CCT)

4000 (Bright White)

2700K

3000K

4500K

6500K

Warm White

Bright White

Daylight

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the Label Reference Guide.


Registration Number: NLSBA-MN67R (8/16/2014)

Model Number: FMKMRL 14 20840

Type: Luminaire - Decorative

PHOTOMETRICS

FMKMRL 14 20830, 1393 delivered lumens, test no. LTL24997, tested in accordance to IESNA LM-79.

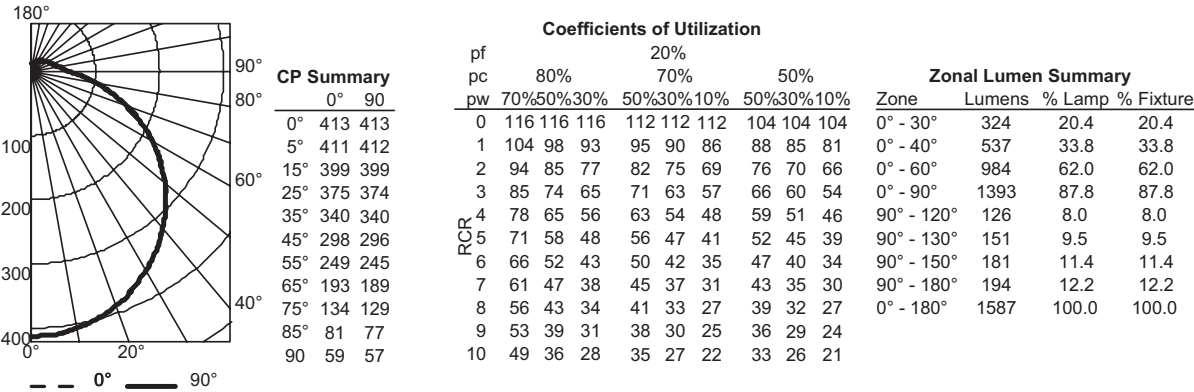

SUGGESTED DIMMERS	
The FMDDHL is designed to operate with most standard Triac Based dimmers and is not compatible with 0-10v dimming systems. The following is a list of dimmers tested and does not imply any guarantee or warranty of compatibility with a particular application. Unlisted dimmers do not imply non-compatibility.	
Manufacturer	Part number(s)
Leviton	6633P
	IPL06
	6674P
	IPE04
	Trimatron 600W
Lutron	DVELV 300P
	Skylark 300P
	NTELV 300
	NLV 600
Synergy	ISD 600 I 120