

FEATURES & SPECIFICATIONS

INTENDED USE — The AL combines clean, fine lines with a unique design that complements any space. The CTRF (Center Fill) option features a center mounted LED source shielded by the secondary refractor that creates a gradient along the luminaire aperture, accentuating the concave primary lens.

Ideal for office spaces, conference rooms, and schools.

CONSTRUCTION — Rugged, pre-painted one-piece cold-rolled steel reflector assembly with embossed steel for increased structural integrity and strength. Polyester powder-paint after fabrication option available. Hinged doorframe assembly retains optical assembly and easy access to electrical components. End plates include integral T-bar clips.

OPTICS — Luminous optical system consists of a unique blend of high performance transmittance diffuser coupled with a concave, clear, ribbed refractor for and unique multi-step appearance. To improve fixture performance and eliminate pixilation the diffuser uses a unique blend of high molecular weight polymer beads with unrelated refractive index.

ELECTRICAL — Long-life LEDs, coupled with high-efficiency drivers, provide superior quantity and quality of illumination for extended service life. 90% LED lumen maintenance at 60,000 hours (L90/60,000).

nLight® embedded controls make each luminaire addressable - allowing it to digitally communicate with other nLight enabled controls such as dimmers, switches, occupancy sensors and photocontrols. Simply connect all the nLight enabled control devices and the AL luminaires using standard Cat-5 cabling. Unique plug-and-play convenience as devices and luminaires automatically discover each other and self-commission. Lumen Management: Unique lumen management system (option N80) provides onboard intelligence that actively manages the LED light source so that constant lumen output is maintained over the system life, preventing the energy waste created by the traditional practice of over-lighting.

Step-level dimming option allows system to be switched to 50% power for compliance with common energy codes while maintaining fixture appearance.

eldoLED driver options deliver choice of dimming range, and choices for control, while assuring flicker-free, low-current inrush, 89% efficiency and low EMI.

Driver disconnect provided where required to comply with US and Canadian codes

INSTALLATION — Lightweight and easy to install in any standard T-Bar system.

Maintenance: LED boards include plug-in connectors for easy replacement or servicing.

Suitable for damp locations.

LISTINGS — CSA Certified to meet U.S. and Canadian standards. IC rated.

DesignLights Consortium® (DLC) Premium qualified product. Not all versions of this product may be DLC Premium qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.

Tested to LM80 standards.

WARRANTY — 5-year limited warranty. Complete warranty terms located at:

www.acuitybrands.com/support/customer-support/terms-and-conditions

Note: Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.

Catalog Number
Notes
Type

AL SERIES

2ALL4 CTRF



2' X 4'
LED



eldoLED



Patent No.: US D680,254 S

DIMENSIONS

All dimensions are inches (centimeters) unless otherwise specified.

Specifications


Length: 48 (121.9)

Width: 24 (61.0)

Depth: 3-3/4 (9.5)

Approximate Weight: 19.5 lbs

Approximate Weight with EM battery: 21 lbs



CSA+ Capable Luminaire

This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and out-of-the-box control compatibility with simple commissioning.

- All configurations of this luminaire meet the Acuity Brands' specification for chromatic consistency
- This luminaire is part of an A+ Certified solution for nLight® control networks when ordered with drivers marked by a shaded background*
- This luminaire is part of an A+ Certified solution for nLight control networks, providing advanced control functionality at the luminaire level, when selection includes driver and control options marked by a shaded background*

To learn more about A+, visit www.acuitybrands.com/aplus.

*See ordering tree for details

2ALL4 CTRF Architectural Lighting 2'x4'



A+ Capable options indicated by this color background.

ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

Example: 2ALL4 CTRF 40L EZ1 LP835 N100

2ALL4 CTRF			
Series	Lumens ¹	Voltage	Driver
2ALL4 CTRF Recessed 2x4, center fill LED	30L 3000 lumens 40L 4000 lumens 48L 4800 lumens 60L 6000 lumens 72L 7200 lumens	(blank) MVOLT (120-277V) 347 347V ²	EZ1 eldoLED dims to 1% (0-10 volt dimming) EZB eldoLED dims to dark (0-10 volt dimming) GZ1 Dims to 1% (0-10V dimming) ³ GZ10 Dims to 10% (0-10V dimming) ³ EDB eldoLED DALI ⁴ SLD Step-level dimming ⁴

Color temperature	Control	Options
LP830 80CRI, 3000 K	(blank) No controls	EL7L 700 nominal lumen battery pack, Noncompliant with CA T20
LP835 80CRI, 3500 K	N80 nLight with 80% (L80) lumen management	EL14L 1400 nominal lumen battery pack, Noncompliant with CA T20
LP840 80CRI, 4000 K	N80EMG nLight with 80% (L80) lumen management for use with generator supply EM power	E10WLCP EM Self-Diagnostic battery pack, 10W Constant Power, Certified in CA Title 20 MAEDBS
LP850 80CRI, 5000 K	N100 nLight without lumen management	CP Chicago plenum
LP930 90CRI, 3000 K	N100EMG nLight without lumen management for use with generator supply EM power	PAF Paint after fabrication
LP935 90CRI, 3500 K		
LP940 90CRI, 4000 K		
LP950 90CRI, 5000 K		

nLight® Control Accessories:			
Order as separate catalog number. Visit www.sensorswitch.com/nLight for complete listing of nLight controls.			
WallPod stations	Model number	Occupancy sensors	Model number
On/Off	nPODM [color]	Standard range 360°, ceiling (PIR / dual tech)	nCM 9 / nCM PDT 9
On/Off & Raise/Lower	nPODM DX [color]	Extended range 360°, ceiling (PIR / dual tech)	nCM 10 / nCM PDT 10
Graphic Touchscreen	nPOD GFX	Wide view (PIR / dual tech)	nWV 16 / nWV PDT 16
Photocell controls	Model number	Cat-5 cable bundles (plenum rated)	Model number
Continuous dimming	nCM ADC	10', CAT5 10FT	CAT5 10FT J1
On/Off & Dimming	nCM PC ADC	15', CAT5 15FT	CAT5 15FT J1

Accessories: Order as separate catalog number.	
DGA24	Drywall ceiling adaptor, unit installation

Notes

- 1 Approximate lumen output.
- 2 Not available with EL7L, EL14L or E10WLCP battery packs or SLD driver.
- 3 GZ1, GZ10 not available with any Controls options.
- 4 Not available with N80, N80EMG, N100, or N100EMG.

How to Estimate Delivered Lumens in Emergency Mode

Use the formula below to estimate the delivered lumens in emergency mode

$$\text{Delivered Lumens} = 1.25 \times P \times \text{LPW}$$

P = Output power of emergency driver. P = 10W for E10WLCP option.

LPW = Lumen per watt rating of the luminaire. This information is available on the ABL luminaire spec sheet.

LPW = Lumen per watt rating of the luminaire. LPW information available in Performance Data section.

Replacement Parts: Order as separate catalog number.				
Part	Description	Includes Door?	Includes Panel Lens?	Includes Center Lens?
DL2ALL	ALL LED 2X4 Door/ Lens	Yes	Yes	Yes
L2ALL	ALL LED 2X4 Panel Lens	No	Yes	No
U03612	ALL LED 2X4 Center Lens	No	No	Yes


2ALL4 CTRF Architectural Lighting 2'x4'

Performance Data				
Lumen	Package	Lumens	Input Watts	LPW
30L	LP830	3056	23.7	128.9
30L	LP835	3078	23.7	129.9
30L	LP840	3124	23.7	131.8
30L	LP850	3259	23.7	137.5
40L	LP830	4086	31.8	128.6
40L	LP835	4116	31.8	129.6
40L	LP840	4176	31.8	131.5
40L	LP850	4358	31.8	137.2
48L	LP830	4749	38.6	122.9
48L	LP835	4784	38.6	123.8
48L	LP840	4854	38.6	125.6
48L	LP850	5065	38.6	131.1
60L	LP830	5953	49.8	119.4
60L	LP835	5997	49.8	120.3
60L	LP840	6085	49.8	122.1
60L	LP850	6349	49.8	127.4
72L	LP830	6915	59.6	116.0
72L	LP835	6966	59.6	116.9
72L	LP840	7069	59.6	118.6
72L	LP850	7376	59.6	123.7

Performance Data				
Lumen	Package	Lumens	Input Watts	LPW
30L	LP930	2535	23.7	107.0
30L	LP935	2603	23.7	109.8
30L	LP940	2648	23.7	111.7
30L	LP950	2784	23.7	117.5
40L	LP930	3390	31.8	106.7
40L	LP935	3480	31.8	109.6
40L	LP940	3541	31.8	111.5
40L	LP950	3722	31.8	117.2
48L	LP930	3940	38.6	102.0
48L	LP935	4045	38.6	104.7
48L	LP940	4116	38.6	106.5
48L	LP950	4327	38.6	112.0
60L	LP930	4938	49.8	99.1
60L	LP935	5071	49.8	101.7
60L	LP940	5159	49.8	103.5
60L	LP950	5423	49.8	108.8
72L	LP930	5737	59.6	96.2
72L	LP935	5890	59.6	98.8
72L	LP940	5993	59.6	100.5
72L	LP950	6300	59.6	105.7

PHOTOMETRICS

2ALL4 CTRF 72L EZ1 LP835, 8043.8 delivered lumens.

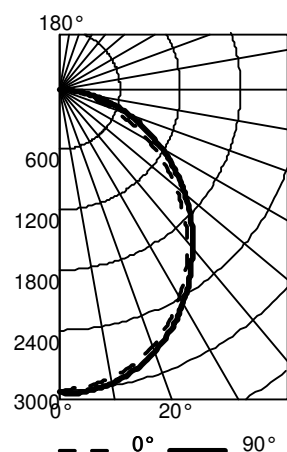

CP Summary

	0°	90°
0°	3014	3014
5°	2973	3021
15°	2835	2892
25°	2564	2635
35°	2192	2265
45°	1747	1852
55°	1261	1405
65°	782	939
75°	359	508
85°	74	98
90°	1	0

Coefficients of Utilization

ROR	pw	80%			70%			50%		
		70%	50%	30%	50%	30%	10%	50%	30%	10%
0	119	119	119	119	116	116	116	111	111	111
1	109	104	100	102	98	95	98	94	92	
2	99	91	84	89	83	78	85	80	76	
3	90	80	72	78	71	65	75	69	64	
4	83	71	62	70	62	55	67	60	54	
5	76	64	55	62	54	48	60	53	47	
6	71	57	48	56	48	42	55	47	41	
7	65	52	43	51	43	37	50	42	37	
8	61	48	39	47	39	33	46	38	33	
9	57	44	35	43	35	30	42	35	30	
10	53	40	32	40	32	27	39	32	27	

Zonal Lumen Summary

Zone	Lumens	% Lamp	% Fixture
0° - 30°	2309	28.7	28.7
0° - 40°	3729	46.4	46.4
0° - 60°	6421	79.8	79.8
0° - 90°	8040	100.0	100.0
90° - 120°	2	0.0	0.0
90° - 130°	2	0.0	0.0
90° - 150°	3	0.0	0.0
90° - 180°	4	0.0	0.0
0° - 180°	8044	100.0	100.0

Constant Lumen Management

Enabled by the embedded nLight control, the ALL actively tracks its run-time and manages its light source such that constant lumen output is maintained over the system life. Referred to as lumen management, this feature eliminates the energy waste created by the traditional practice of over-lighting.

