

FEATURES & SPECIFICATIONS

INTENDED USE — Recessed housing rated IC or Non-IC. For remodel construction only.

Approved for factory assembled wiring only.

Approved for direct burial in insulation.

CONSTRUCTION — Air-tight standard. Tested to meet current energy codes.

Aluminum foam-gasketed housing with three remodel clips for installation in existing plaster, sheet rock or mechanical ceiling.

Heavy-gauge galvanized steel raceway arm.

Galvanized steel junction box with four built-in Romex clamps. Five 1/2" knockouts with slots for pryout. Not suitable for pulling wires.

Rated for 90° C.

Ground wire provided.

Removable J-box doors for easy access.

ELECTRICAL — Quick disconnect provided for power connection to the LED modules.

Paint overspray masked by disposable disconnect plug.

Housing and LED module combination is IC rated and thermally protected.

120 volt only.

INSTALLATION — Air-tight housing suitable for air-tight installations. Refer to energy codes for proper installations.

2x8 and 2x6 existing ceiling or T-bar ceiling panel installation.

Clip adjustment on housing (up to 1/2") allows for flush mounting with ceiling face.

LISTINGS — UL Listed to US and Canadian safety standards. Damp location listing (See trim selection for wet location listing).

WARRANTY — 1-year limited warranty. Complete warranty terms located at www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Note: Actual performance may differ as a result of end-user environment and application. Specifications subject to change without notice.


Catalog Number
Notes
Type

4" LED Housing

L3RLED T24



LED
IC/Non-IC
Remodel Construction

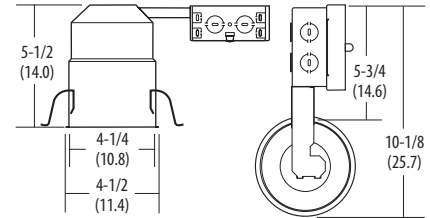

Specifications

- Height: 5-1/2 (14.0)
- Length: 10-1/8 (25.7)
- Width: 5-3/4 (14.6)
- Ceiling opening: 4-1/4 (10.8)
- Ceiling cutout template: 4.01

All dimensions are inches (centimeters) unless otherwise specified.

ORDERING INFORMATION

For shortest lead times, configure product using **bolded options**.

Example: L3RLED T24

Series	Options	Packaging
L3RLED T24		
L3RLED T24	<p>Shipped installed in fixture</p> <p>PHC Poke-home wire connector</p>	<p>R6 Resale pack of six</p> <p>U Unit</p>

Accessories: Order as separate catalog number.
ATK3 R6 Airtight trim kit

Notes

See trim summary on reverse side for maximum wattages.

L3RLED T24 4" Remodel Housing

P Series Open and Baffle Wide Flange LED Modules (Wet Location)



ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

Example: 4BP TRMW LED 27K 90CRI L3RLED T24

Series/Finish	Lamp	CCT / CRI / W / Lumens ¹	Voltage
4BPMW	4" Baffle LED module, matte white	LED	(blank) 120V
4BP TRMW	4" Baffle LED module, black baffle, matte white flange	(blank) 3000 K / 83CRI / 10.6W / 620L	
4BPBN	4" Baffle LED module, brushed nickel	27K 90CRI 2700 K / 93CRI / 11.2W / 600L	
4BPORB	4" Baffle LED module, oil-rubbed bronze	30K 90CRI 3000 K / 93CRI / 11.2W / 600L	
4OPA	4" Open LED module, clear diffuse	40K 90CRI 4000 K / 92CRI / 9.9W / 650L	
4OPAZ	4" Open LED module, clear specular		
4OPA TRMW	4" Open LED module, clear diffuse, matte white flange		
4OPAZ TRMW	4" Open LED module, clear specular, matte white flange		

Notes

1 Total system delivered lumens.

LED Gimbal Module (Damp location)



ORDERING INFORMATION

For shortest lead times, configure product using **bolded options**.

Example: 4G1MW LED L3RLED T24

Series/Finish		Lamps	CCT / CRI / W / Lumens ²	Voltage
4G1	4" Gimbal module	LED	(blank) 3000k / 83CRI / 7.9W / 435L	(blank) 120V
	MW Matte white		27K 90CRI 2700K / 91CRI / 8.3W / 480L	
	MB Matte black ¹		30K 90CRI 3000K / 93CRI / 7.7W / 500L	
	BN Brush nickel ¹		40K 90CRI 4000K / 94CRI / 8W / 560L	
	ORB Oil-rubbed bronze ¹			

Notes

1 Available in 30K 83CRI only.
2 Total system delivered lumens.

E Series Baffle Wide Flange LED Modules (Wet Location)



ORDERING INFORMATION

For shortest lead times, configure product using **bolded options**.

Example: 4BEMW LED L3RLED T24

Series/Finish	Lamps	CCT / CRI / W / Lumens ¹	Voltage
4BEMW	4" Baffle LED module, matte white	LED	(blank) 120V
	MW Matte white	27K 2700 K / 82CRI / 10.3W / 530L	
	MB Matte black	30K 3000 K / 82CRI / 10.3W / 570L	
	BN Brush nickel	40K 4000 K / 82CRI / 10.3W / 600L	
	ORB Oil-rubbed bronze		

Notes

1 Total system delivered lumens.