



Shown actual size: Diva preset dimmer and 1-gang Claro wallplate in White (WH).

Product family features

- Large paddle switch with a captive linear slide dimmer for a standard Designer wallplate opening
- Preset dimmer
- LED+, reverse-phase, and 0-10V models available
- Coordinating Claro, Satin Colors, and Stainless Steel wallplates only available separately
- All models must be derated unless otherwise noted. Visit lutron.com/multigang for more information.

Control types

- 🔌 Single-pole (1 location)
- 🔌🔌🔌 3-way or 4-way (2 or more locations)

Direct load type compatibility

- 💡 Dimmable LED/CFL lighting (screw-base)
- 💡 Incandescent/halogen lighting
- 🔌 Magnetic low-voltage lighting
- 🔌 Electronic low-voltage lighting
- 🌀 LED lighting
- 🔌 Fluorescent lighting
- 🔌 Switched lighting/fan/motor
- 🌀 Ceiling fans

Load type requiring load interface


- 🌀 Neon/cold cathode lighting

Lighting load interfaces may be required for some additional load type, voltage, and capacity combinations. For additional information see "Lighting Load Interfaces."

Available finishes

Use **BOLD** color code in model number (Example: DVCL-153P-**BL**)

Gloss

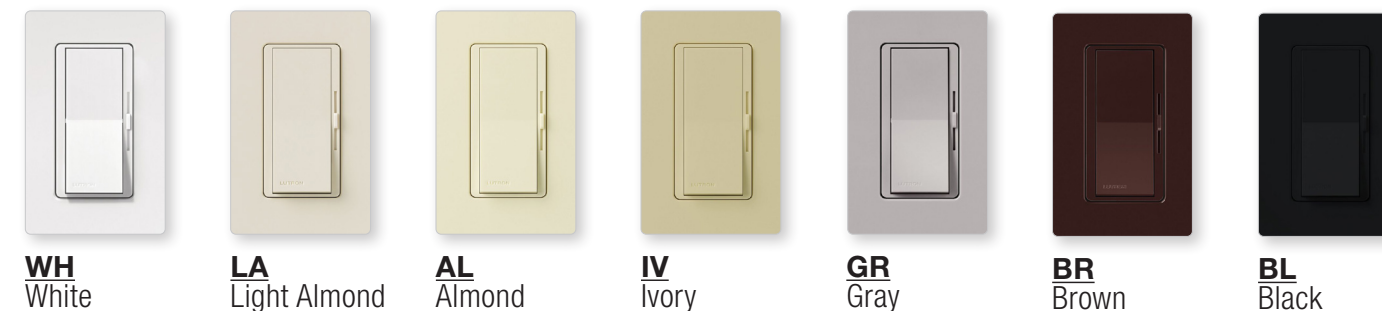

Satin Finishes



Metal wallplate*



* Stainless Steel metal wallplate only available separately and includes black plastic trim/adaptor, visible from side. Match with separate Black (BL) or Midnight (MN) controls.

Dimmers



- Paddle turns on/off
- Slide up to brighten, down to dim
- LED+ dimmers provide reliable dimming of dimmable LEDs/CFLs, as well as halogens and incandescents

Dimmable LED/CFL (screw-base) dimmers

Incandescent/halogen dimmers

LED+ dimmers

3-way/single-pole 120V 150W (LED/CFL), 600W (Inc)	DVCL-153P- XX ¹ DVSCCL-153P- XX ²
---	--

3-way/single-pole 120V 250W (LED/CFL), 600W (Inc) 350W (Hi-lume 1% LED driver, max. 8)	DVCL-253P- XX ¹ DVSCCL-253P- XX ²
---	--

Visit lutron.com/LEDfinder for our online compatibility tool.

Adjustable low-end trim.

Dimmable LED/CFL (screw-base) dimmers

Incandescent/halogen dimmers

Electronic low-voltage dimmers

Reverse-phase dimmers*

3-way/single-pole 120V 250W (LED/CFL), 500W (Inc), 500W (ELV)	DVRP-253P- XX ¹ DVSCR-253P- XX ²
---	---

When dimming LEDs/CFLs, only bulbs marked or rated as dimmable with reverse-phase may be used.

Visit lutron.com/LEDfinder for our online compatibility tool.

No low-end trim.

XX¹: Gloss color codes

XX²: Satin color codes

Wallplates not included. Order separately.

Incandescent/halogen dimmers

Dimmers

Single-pole 120V 1000W	DV-10P- XX ¹ DVSC-10P- XX ²
3-way/ 120V 1000W	DV-103P- XX ¹ DVSC-103P- XX ²

Magnetic low-voltage dimmers

Dimmers

Single-pole 120V 600VA (450W)	DVLV-600P- XX ¹ DVSCLV-600P- XX ²
Single-pole 120V 1000VA (800W)	DVLV-10P- XX ¹ DVSCLV-10P- XX ²
3-way 120V 600VA (450W)	DVLV-603P- XX ¹ DVSCLV-603P- XX ²
3-way 120V 1000VA (800W)	DVLV-103P- XX ¹ DVSCLV-103P- XX ²

The stated VA (volt-ampere) rating includes the magnetic transformer heat losses and the lamp load. The stated W (watt) rating is the maximum lamp wattage based on assumed 20% transformer loss.

Electronic low-voltage dimmers

Dimmers*

Single-pole 120V 300W	DVELV-300P- XX ¹ DVSCELV-300P- XX ²
3-way 120V 300W	DVELV-303P- XX ¹ DVSCELV-303P- XX ²

* Requires neutral wire connection

3-wire LED driver/fluorescent ballast dimmers

Dimmers*

3-way/single-pole 120V 8A	DVF-103P- XX ¹ DVSCF-103P- XX ²
3-way/single-pole 277V 6A	DVF-103P-277- XX ¹ DVSCF-103P-277- XX ²

No derating required if ganged.

Adjustable low-end trim.

0-10V LED/fluorescent fixture dimmers (current sink control)

Dimmers

3-way/single-pole 120-277V 8A	DVSTV- XX ¹ DVSCSTV- XX ²
----------------------------------	--

50mA max control current

No power pack required.

No derating required if ganged.

0-10V LED/fluorescent fixture dimmers (current sink control – power pack required)

Dimmers*

Single-pole 30mA max control current	DVTV- XX ¹ DVSCTV- XX ²
---	--

Control provides dimming signal only. For dimming with on/off switching, **use with Lutron power pack**: PP-DV or PP-347H.

Compatible with any IEC 60929 Annex E compliant driver or ballast.

No derating required if ganged.

XX¹: Gloss color codes

XX²: Satin color codes

Wallplates not included. Order separately.

Tu-Wire fluorescent ballast dimmers

Dimmers

3-way/single-pole 120V 5A	DVFTU-5A3P- XX ¹ DVSCFTU-5A3P- XX ²
------------------------------	--

Compatible with Advance Mark X and Sylvania POWERSENSE fluorescent ballasts, in addition to Lutron Tu-Wire.

* Requires neutral wire connection

Mechanical switches



- Paddle turns on/off
- Use with any 15A load
- General purpose switching of all light sources and motor loads
- Available with locator light

General purpose switches

Mechanical switches

Single-pole 120/277V 15A	CA-1PS- XX ¹ SC-1PS- XX ²
3-way 120/277V 15A	CA-3PS- XX ¹ SC-3PS- XX ²
4-way 120/277V 15A	CA-4PS- XX ¹ SC-4PS- XX ²

Mechanical switches with locator light

Single-pole 120V 15A	CA-1PSNL- XX ³ SC-1PSNL- XX ⁴
3-way 120V 15A	CA-3PSNL- XX ³ SC-3PSNL- XX ⁴
4-way 120V 15A	CA-4PSNL- XX ³ SC-4PSNL- XX ⁴

No derating required if ganged.

XX¹: Gloss color codes
XX²: Satin color codes
XX³: Available in Gloss White (WH), Ivory (IV), Almond (AL), and Light Almond (LA)
XX⁴: Available in Satin Colors Snow (SW), Biscuit (BI),
 Wallplates not included. Order separately.

Fan controls



- Paddle turns fan on/off
- Slide up to increase speed, down to decrease speed
- 3 quiet fan speeds for increased comfort
- For use with only one ceiling paddle fan
- Designed to prevent motor hum

Fan controls

Fan controls—quiet 3-speed

3-way/single-pole 120V 1.5A	DVFSQ-F- XX ¹ DVSCFSQ-F- XX ²
3-way/single-pole 120V 2A	DVFSQ-F-HO- XX ¹

DVFSQ-F-HO model for use with Hunter Original Series fans.

Does not include built-in locator light.
 No derating required if ganged.

XX¹: Gloss color codes
XX²: Satin color codes
 Wallplates not included. Order separately.

Fan/light controls



- **Switch** (paddle)
 - Turns light on/off
- **Fan Control** (slider)
 - Use slide to turn fan on/off and adjust fan speed
 - 3 quiet fan speeds for increased comfort
 - For use with only one ceiling paddle fan
 - Designed to prevent motor hum

Fan/light controls

Fan/light controls—quiet 3-speed

Single-pole 120V 1.5A Fan, 120V 1A LED/CFL, 2A Incandescent/halogen	DVFSQ-LF- XX ¹ DVSCFSQ-LF- XX ²
--	--

No derating required if ganged.
 Does not include built-in locator light.