


MARK ARCHITECTURAL LIGHTING™



Slot 2 LED Direct/Indirect Pendant Tunable White

The Slot LED family of luminaires offers an unparalleled package of performance and features for your next lighting project. Precision lumen DIRECTIR optics deliver optimized light where needed for ceilings and walls. With other key features such as simplified installation, seamless controls integration and superior color constancy, the Slot LED family from Mark Lighting offers exceptional quality and design flexibility.

Type:

Project:

Catalog Number:

DO NOT TYPE HERE. Autopopulated field.

Specification Features

Housing

Nominal 2.5" x 4.375" extruded aluminum housing

Finish

White, Black or Silver powdercoat

Reflector

Formed steel with high reflectance white

Distribution/Shielding

Extruded 90% transmissive acrylic lens with a textured surface providing diffuse illumination and a uniform appearance for direct lambertian distribution (No Optics). Wall Wash (WW) and Wall Graze (WG) distribution options incorporate co-extruded lenses. Shielding is available as an external blade louver for WW or WG options, or an internal blade louver in lieu of lambertian distribution diffuser. Clear Acrylic dustcover (DC) is available for the indirect distribution only.

LED Components

Linear: Nichia®- 757 series LED chips (>80 CRI)

Electrical

Long-life LEDs, coupled with high-efficiency drivers, provide superior quantity and quality of illumination for extended service life. 80% LED lumen maintenance at 60,000 hours (L80/60,000).

Color Consistency

The Acuity Brands circuit boards for the linear LED components use a precise binning algorithm which creates a consistent color temperature from board to board. The color a variation of no greater than a 2.5 Step MacAdam (2.5SDCM) along the black body locus from board to board.

Driver

eldoLED® driver provides natural dimming with smooth, continuous and flicker-free deep dimming. Supports operation between 120VAC and 277 VAC, with low inrush current (NEMA 410) and THD < 20%. Meets FCC Title 47 C.F.R. 15 Class A or Class B requirements.

Certification

CSA tested to UL 1598 standards, assembled in the USA.

Warranty

5-year limited warranty. Complete warranty terms located at:

www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Note: Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.


Mainstream Dynamic Tunable White with nTune Technology

Tunable white nTune™ is an all digital light color temperature control within an nLight enabled luminaire. This brings tunable white lighting control into the mainstream with repeatable, consistent results in an economical luminaire form and system already familiar to schools. Designers and facility operators are granted the freedom to tie scenes to specific activities or to complement colors or materials within a visual environment. nTune™ allows color temperature settings through the Productivity Range of 3000K 5000K or Rhythm Range of 2700K to 6500K. Refer to the nLight Programming User's Guide for instructions on customizing to your application with SensorView™.

Tunable White GPHD

- **Gamut:** One dimensional warm-Cool
- **Path:** Direct 3000K to 5000k (Productivity Range) or 2700K to 6500K (Rhythm Range)
- **Handle:** Two Natural Language Handles: Intensity and CCT
- **Data:** nLight with nTune technology for both handles of control


Technical Drawing

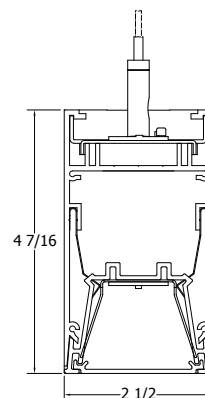

Direct/Indirect Pendant




eldoLED
your product | our drive

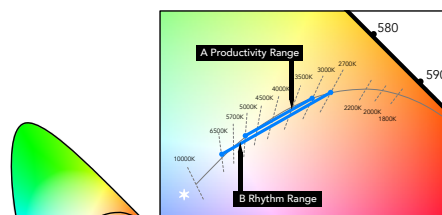

A Productivity Range 3000K to 5000K

B Rhythm Range 2700K to 6500K



Ordering

Example: S2LID 4FT MSL4 80CRI TUWH PROR 600LMF I80CRI I600LMF DARK NLT SCT 120 WHT F1/36A SQCY WHTCY WCRD

--	--	--	--	--	--	--

Series	Plan	Total Run Length	Max Section Length	Direct Light Source Color Rendering	Dynamic Feature	Dynamic Range
S2LID Slot 2 Pendant - Indirect / Direct	LCB Linear center balanced LLP Linear longest possible	_FT ¹ Specify continuous run length (in whole feet 2' minimum)	MSL4 4'	80CRI 80 CRI	TUWH Tunable White	PROR Productivity Range (3000K-5000K) RHYR Rhythm Range (2700K-6500K)
			MSL6 6'	90CRI 90 CRI		
			MSL7 7'			
			MSL8 8'			

--	--	--	--	--	--

Direct LED Light Output	Direct Distribution (Optics)	Indirect Light Source Color Rendering	Indirect LED Light Output	Indirect Distribution (Optics)	Minimum Dimming Level
400LMF 400 Lumens per FT	(blank) Standard Lambertian Distribution	I80CRI 80CRI I90CRI 90CRI	I600LMF 600 Lumens per FT I800LMF 800 Lumens per FT I1000LMF 1000 Lumens per FT I1200LMF 1200 Lumens per FT	(blank) No indirect distribution / Standard lambertian BW Batwing Distribution AS Asymmetric Distribution	DARK Constant current, dimming to 0.1%
600LMF 600 Lumens per FT	WW ³ Wallwash Distribution WG ³ Wall Graze Distribution		L_LMF ## Lumens per FT (Limited to 500LMF to 1300LMF in 50LMF increments)		
800LMF 800 Lumens per FT					
_LMF ## Lumens per FT (Limited to 350LMF to 1050LMF in 50LMF increments)					

--	--	--	--	--	--

Control Interface	Switching	Optional Shielding ²	Voltage	Finish	Emergency Options
NLT nLight nTune interface	SCT Single Circuit DCT Dual Circuit	(blank) No Louver LVRD Dropped Louver LVRR Regressed Louver painted to match fixture finish LVRRA Regressed Aluminum Finish EGLD Edge View Direct Lens	MVOLT Multi-volt, 120-277 120 120V 277 277V	WHT White (gloss) BLK Black (gloss) SLV Silver (gloss) WHTT White (textured) BLKT Black (textured) SLVT Silver (textured)	E10WLCP⁴ 4ft emergency section w/ battery pack 900 lumens _E10WLCP⁴ # 4ft emergency sections w/ battery pack 900 lumens _EC⁵ # of Emergency Circuits BGTD^{5,6} Generator Transfer Device

--	--	--	--	--	--

Sensor	Secondary Sensor	Tertiary Sensor	Mounting Type	Overall Suspension	Canopy Form
NS No Sensor PDT_ Occupancy Sensor- Dual Technology (Passive Infrared & Microphonics) ADC_ Photocell- Daylight Dimming Sensor API_ PIR Occupancy Sensor & Photocell APD_ PDT Occupancy Sensor & Photocell	SNS No Secondary Sensor SPDT_ Occupancy Sensor- Dual Technology (Passive Infrared & Microphonics) SADC_ Photocell- Daylight Dimming Sensor SAPI_ PIR Occupancy Sensor & Photocell SAPD_ PDT Occupancy Sensor & Photocell	TNS No Tertiary Sensor	F1/ T-bar ceiling (universal mounting bracket) F1A/ T-bar ceiling (UMB with integrated J-box) F2/ Hard ceiling (horizontal J-box)	36A 36" adjustable 72A 72" adjustable 144A 144" adjustable *Measured from ceiling to bottom of luminaire.	RDCY Round Canopy SQCY Square Canopy

--	--	--	--

Canopy Color	Cord Color	Environmental Listing	Options
BLKCY Black canopy WHTCY White canopy	WCRD white cord CCRD clear cord	DPL Damp Location Listing	DC⁷ Clear Dust Cover DCF⁷ Frosted Dust Cover MCS 5" support to match power feed canopy


Notes:
 1. Fixture length may effect available options, consult factory with validation issues. 2Ft section only available with 600LMF/I800LMF, 800LMF/I1000LMF, and 1000LMF/I1200LMF lumen packages.
 2. Optional shielding not available with sensors.
 3. Not available with EGLD, LVRD, or LVRRA options.
 4. Only available in 8FT sections.
 5. Powers entire direct fixture section (power direct and indirect fixture sections on 2ft fixtures).
 6. Must select 120 or 277.
 7. Not available with AS or BW options.

A+ Capable Luminaire
 This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and out-of-the-box control compatibility with simple commissioning.


- All configurations of this luminaire meet the Acuity Brands' specification for chromatic consistency
- This luminaire is part of an A+ Certified solution for nLight® control networks when ordered with drivers marked by a shaded background*
- This luminaire is part of an A+ Certified solution for nLight control networks, providing advanced control functionality at the luminaire level, when selection includes driver and control options marked by a shaded background*

To learn more about A+, visit www.acuitybrands.com/aplus.
 *See ordering tree for details


Shielding




Co-Extruded WG




Co-Extruded WW




Edge View Lens




External Louver




Regressed Louver




Co-Extruded WG
(Standard)




Co-Extruded WW
(Standard)



Edge View Lens
(Optional)



External Louver WW
(Painted to Match Housing)




Regressed Louver
(Natural Aluminum
or Painted to Match
Housing)

Fixture Performance


4FT Individual (80 CRI)		Rhythm Range (RHYP)						Productivity Range (PROR)					
		Total Lumens			Lumens Per Watt			Total Lumens			Lumens Per Watt		
	Lumen Output	2700K	4600K	6500K	2700K	4600K	6500K	3000K	4000K	5000K	3000K	4000K	5000K
Direct	400LMF	1179	1127	1150	81	83	84	1211	1052	1118	84	85	87
	600LMF	1813	1738	1735	81	84	86	1838	1660	1690	83	85	88
	800LMF	2412	2204	2274	80	85	84	2447	2194	2321	82	85	85
	1000LMF	2856	2705	2844	79	85	84	2896	2711	2893	80	87	85
Indirect	600LMF	2199	2018	2145	135	140	143	2282	2044	2203	142	145	149
	800LMF	2860	2562	2727	137	144	143	2953	2592	2712	142	148	147
	1000LMF	3818	3589	3861	134	144	142	3950	3643	3857	140	151	148
	1200LMF	4524	4249	4543	131	140	140	4689	4171	4465	140	149	142

Run Patterns, Corners and Junction


Slot 4 LED patterns can be configured in 1' increments with illuminated 90° inside and outside corners, T junctions, and X junctions with standard 2' corner and junction lengths. For custom angles, corner or junction lengths, consult factory. See separate patterns spec sheet for details.



90° Corner



T Junction



X Junction

LINEAR PLAN:

Mark Lighting offers the ability to provide a continuous run plan to suit your requirements by optionally offering three different methods of configuration.

LSL- Linear Same Length:

In this configuration, each segment is the same length and is standardized based on the longest length available and is the only option provided. Because it is dependent on one segment length there are mathematical limitations on what overall row lengths can be achieved. Example: 20 FT row would be achieved with 5, 4 FT long segments equaling 20 FT (nominal).

LSL	4FT	4FT	4FT	4FT	4FT
------------	-----	-----	-----	-----	-----

LLP- Linear Longest Possible

In this configuration, the longest length available is optimized, resulting in the fewest segments and mounting locations. Caution, should be used where balanced appearance is a concern. Example: 20 FT run would have 2, 8 FT segment and 1, 4 FT segment at the end of the run.


LLP	8 FT	8 FT	4FT
------------	------	------	-----

LCB- Linear Center Balanced:

This configuration incorporates the longest center segment(s) along with any additional lengths required to fill the run length, added to the run ends. Example: 16 FT run would have 2, 4 FT segments (one at each end) and 1, 8 FT segment in the center.


LCB	4 FT	8 FT	4FT
------------	------	------	-----

Individual Fixture Configurations

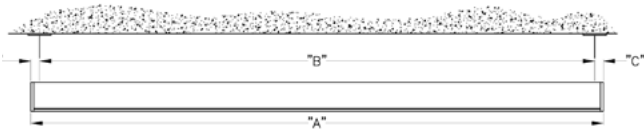


INDIVIDUAL UNITS (MOUNTING)			
LENGTH	"A" O.A.L.	"B" O.C.	"C" FROM END
2FT	2'- 5/8"	2'-0"	5/16"
3FT	3'- 5/8"	3'-0"	5/16"
4FT	4'- 5/8"	4'-0"	5/16"
5FT	5'- 5/8"	5'-0"	5/16"
6FT	6'- 5/8"	6'-0"	5/16"
7FT	7'- 5/8"	7'-0"	5/16"
8FT	8'- 5/8"	8'-0"	5/16"

Run Configurations

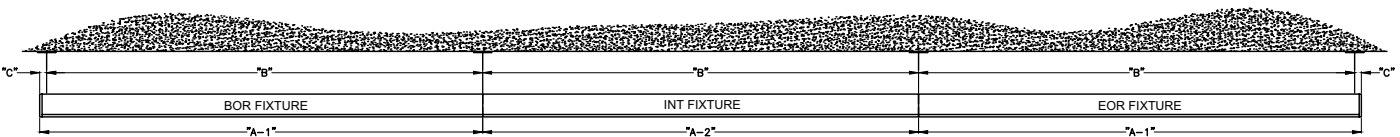

RUN LAYOUT (MOUNTING)				
LENGTH	"A-1" O.A.L.	"A-2" O.A.L.	"B" O.C.	"C" FROM END
2FT	2'-0 5/16"	2'-0"	2'-0"	5/16"
3FT	3'-0 5/16"	3'-0"	3'-0"	5/16"
4FT	4'-0 5/16"	4'-0"	4'-0"	5/16"
5FT	5'-0 5/16"	5'-0"	5'-0"	5/16"
6FT	6'-0 5/16"	6'-0"	6'-0"	5/16"
7FT	7'-0 5/16"	7'-0"	7'-0"	5/16"
8FT	8'-0 5/16"	8'-0"	8'-0"	5/16"

Feed Point Locations




Direct/Indirect, nLight Controls (wired), Linear No Separate Switching (SCT) or Linear Separate Switching (DCT)




Direct/Indirect, Battery (E10WLCP), nLight Controls (wired), Linear No Separate Switching (SCT) or Linear Separate Switching (DCT)

Single Feed Points




5" Square




5" Round

Double Feed Points / feed and cat 5 points




5" Square




5" Round

Non-Fed Points for T-Bar Mounting



2" Square



2" Round


Refer to page 7 for mounting details.

Continuous Runs


Slot 4 LED continuous rows can be configured in 1' increments and featuring the AEL precision joiner to create a hairline seam between luminaires, providing a monolithic visual aesthetic. For custom run lengths less than a 1' increment, consult factory.

Joiners


AEL Precision Row-Mount 3-step fixture-to-fixture connection method



Step 1: Align



Step 2: Engage



Step 3: Lock

MARK

ARCHITECTURAL LIGHTING™

Slot 2 LED

Direct/Indirect Pendant Tunable White

MOST COMMON MOUNTING TYPES AND OPTIONS Options available for this specific luminaire are checked in the boxes below.

Mounting Type


- F1/** For use with most T-Bar and screw slot grid ceilings. Designed for on-grid and off-grid applications.
- F2/** For use with recessed or surface mount horizontal J-box applications.
- F1A/** For use with most T-Bar grid ceilings. Designed for on-grid applications. *Comes complete with J-box with built-in cutout to go over grid*

Mounting Options


- MCS** Matching canopy at support for aesthetics.

Indicates mounting options available with this luminaire.


F1/

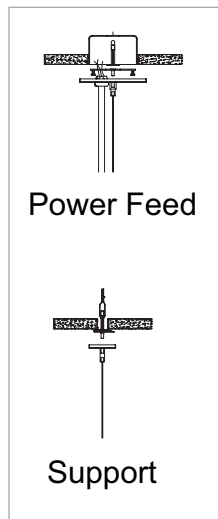


F1/ ordered with MCS

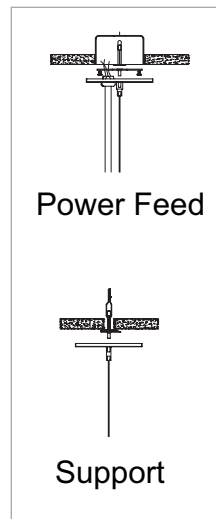


F1A/

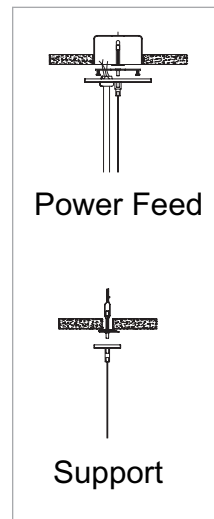


F1A/ ordered with MCS

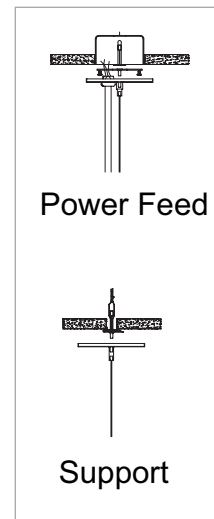

F2/


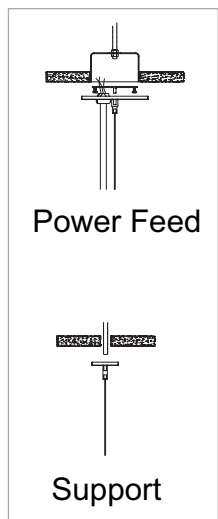


F2/ ordered with MCS


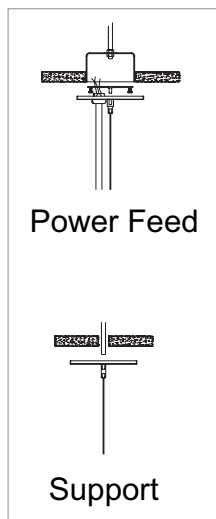


INTEGRATED SENSOR LAYOUT

CORRECT:

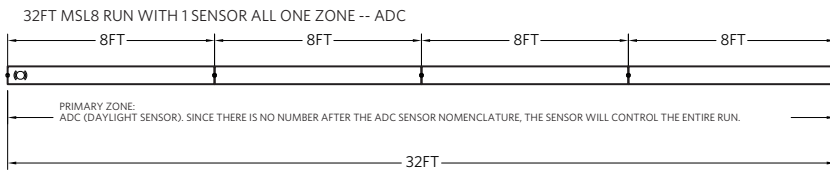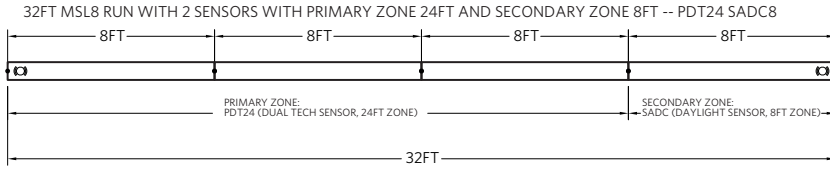

INCORRECT:

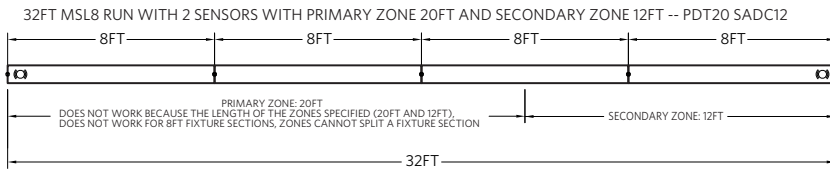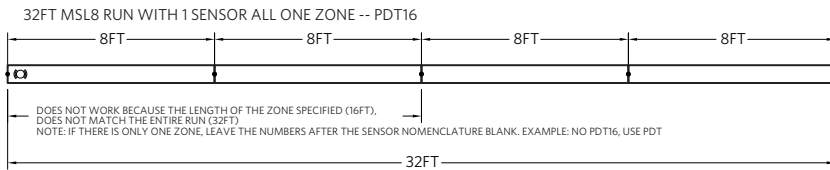

Notes:

- Only one sensor per zone
- At the most, the entire run can only have 2 sensors (thus 2 sensors zones at the most)
- Sensor zone can not split fixture sections
- No overlapping zones


OCCUPANCY DETECTION COVERAGE

At the 7.5 ft (2.9 m) hanging height of a typical pendant mount fixture the sensor provides 10 ft (3.05 m) radial detection of small motion. At a 9 ft (2.74 m) hanging height the radius is 12 ft (3.66 m) for small motion.

Adequate for walking motion detection from mounting heights between 7.5 ft (2.29 m) and 20 ft (6.10 m).


Initial detection will occur earlier when walking across sensor's field of view than when walking directly at sensor.

Initial detection of walking motion into long coverage segment will occur at distances of 2x the mounting height up to 15 ft (4.57 m) and 1.75x up to 20 ft (6.10 m). Lens assembly rotates 15° to enable adjustment in order to line up long segments.

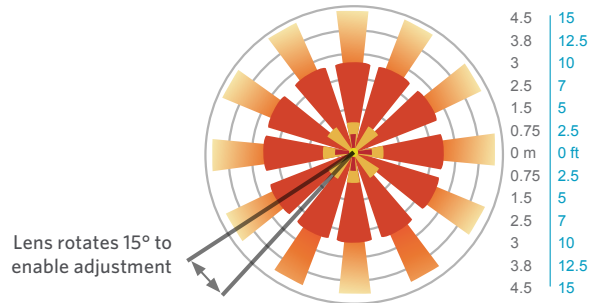

Integrated Controls

Optional nLight® integrated controls make Slot LED luminaires addressable- allowing them to digitally communicate with other nLight enabled controls such as dimmers, switches, occupancy sensors and photocontrols. Simply connect all the nLight enabled control devices using standard CAT5 Cabling.



Occupancy Sensor and/or Photocell

MARK

ARCHITECTURAL
LIGHTING™



Slot 2 LED

Direct/Indirect Pendant
Tunable White

Remote BGTD Mounting Options

Recessed in sheetrock ceiling; rod mounted to structure. Consult factory for other ceiling types or canopy options.

6 foot flexible conduit included, BGTD option should be mounted within 6 feet of junction box above fixture.

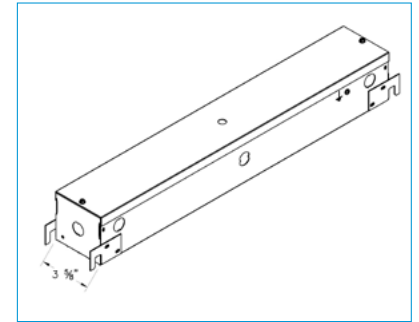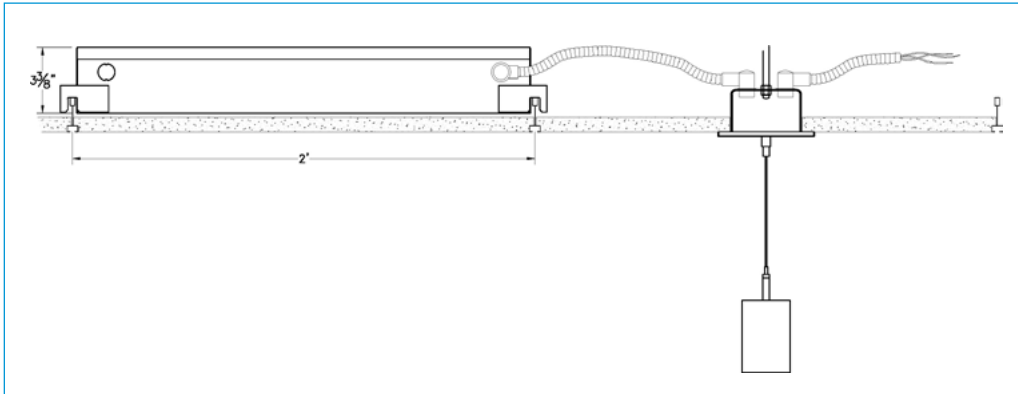



Accessible Ceiling

Tunable White Wall Pod



nPODM 2P DX CCT

Typical nLight network layout with power supply, sensor and wallpod.

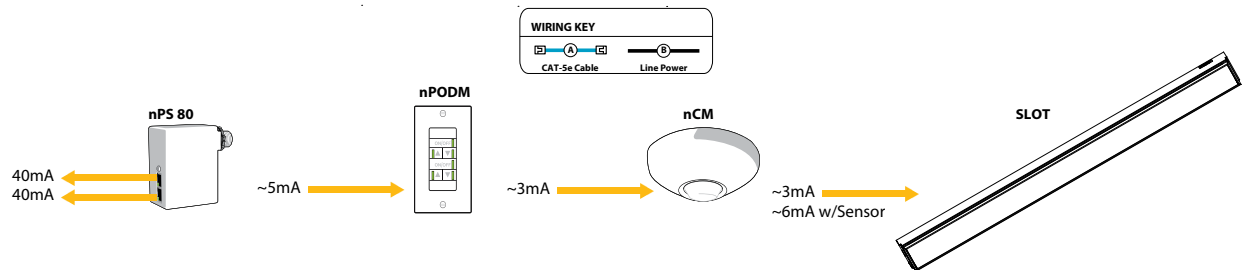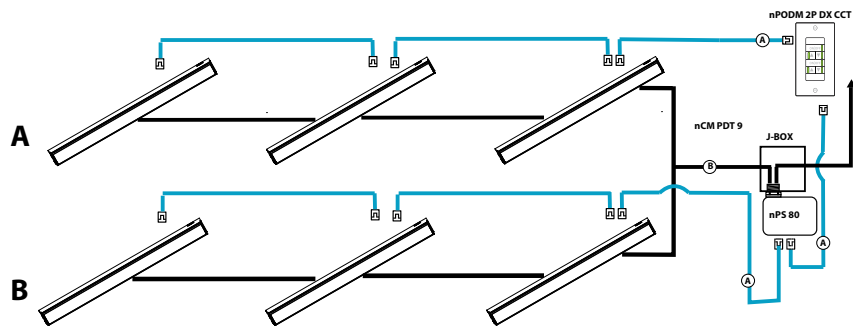

*Note: Also applicable to linear runs. Each 4' fixture section must be connected, by CAT5 cable, to another fixture.