

Metalux AP Series

DESCRIPTION

The Metalux FM is an Energy Star LED flushmount with a field selectable CCT switch that enables customization (from warm to bright white) to suit any decor. The FM has a 120V FCC Class B dimming driver, round or square low-profile lens, and LEDs rated for 50,000 hours. The FM LED energy savings is up to 80% over traditional incandescent or fluorescent options. Typical surface mount applications include bedroom, closet, corridor, stairway and utility rooms.

Catalog #		Type
Project		
Comments		Date
Prepared by		

SPECIFICATION FEATURES

Construction

- Die formed post painted white steel housing
- Available sizes: 9", 11", 15" and 19" nominal
- Injection molded acrylic round lens
- Tool-less twist and lock channel groove lens retention design for easy maintenance
- Cam-latch lens retention design (19" FM round only)

Controls

- Standard 120V Dimming drivers
- Compatible with most standard dimmer switches

Electrical

- Selectable switch configuration includes 3000K, 4000K, and 5000K CCT
- 120V, FCC Class B rated, Dimming Driver
- L70 at 50,000 rated life-hours (TM-21), or greater than 43 years at 3 hrs/day
- LEDs are 80 CRI minimum

Shielding

- Round low-profile die formed lens design
- Standard smooth opal white blend provides even illumination with no pixelization
- Lens provides 360-degrees of light distribution

Installation

- Surface (wall or ceiling) mount capable via junction box
- Includes hardware, cross-bar and wire connectors
- Ambient temperature range: 0°F-122°F

Compliance

- UL/cUL listed for dry location
- Energy Star qualified
- RoHS compliant
- LED complies with IESNA LM-79 and LM-80

Warranty

- Five year warranty



FM WR CCT SELECT

LED Low Profile Round Flushmount

Wall or Ceiling Mount

	Feature	Benefit
Performance	Field Selectable CCT (3000-4000-5000K)	Customize light color to match any space
	Energy Star certification	Eligible for Energy Rebates
	5-year warranty	Certified and guaranteed performance
Construction	Long life LED source, 50K life-hrs.	No costly lamp replacements
	J-Box mountable, Hardware included	Easy to install
	Opal white lens for 360-degree of light	Even illumination and light for safety

ORDERING INFORMATION

Catalog Number	Unit Carton UPC	I2of5	Pallet Qty.
FM9WRCCR	080083845392	10080083845399	96
FM11WRCCR	080083840151	10080083840158	72
FM15WRCCR	080083845378	10080083845375	32
FM19WRCCR	080083845415	10080083845412	24

PERFORMANCE DATA*


Catalog Number	Lumens	Watts
FM9WRCCR	900	12.3
FM11WRCCR	1100	14
FM15WRCCR	1600	21.3
FM19WRCCR	2500	32.8

* Performance is measured at 3000K CCT



DIMENSIONS

Catalog Number	A	B	C	D
FM9WRCCR	10-1/4" [260mm]	3-3/8" [86mm]	8-11/16" [221mm]	11/16" [18mm]
FM11WRCCR	11" [280mm]	3-3/16" [80mm]	9-7/8" [251mm]	5/8" [17mm]
FM15WRCCR	15-1/16" [383mm]	4-1/8" [105mm]	13-1/4" [336mm]	11/16" [18mm]
FM19WRCCR	19" [483mm]	4-5/8" [118mm]	17-9/16" [446mm]	11/16" [18mm]

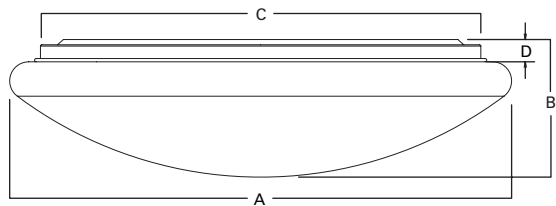

SHIPPING DATA

Catalog No.	Individual Wt.	Master Pack	Pallet
FM9	1.2 lbs.	8	96
FM11	2.9 lbs.	4	72
FM15	3.8 lbs.	4	32
FM19	4.9 lbs.	2	24