





# Juno SlimForm™ LED with Selectable CCT

11" and 13" Round Downlight for JBox Installation

## JSF Series



### Dimensions

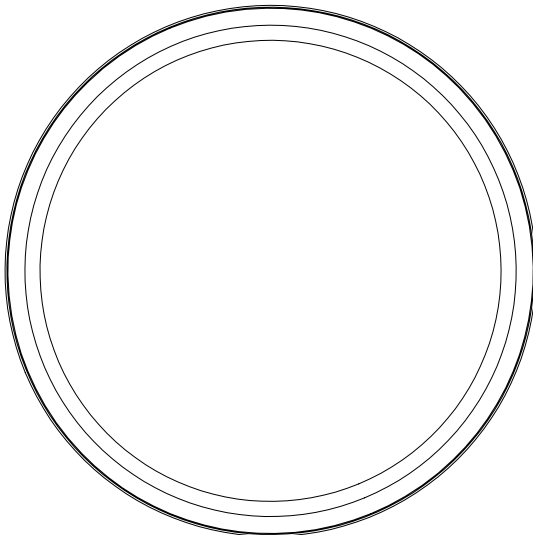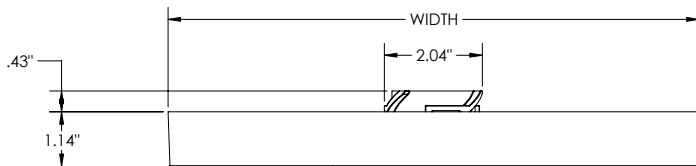

Project:
Fixture Type:
Location:
Contact/Phone:

### Product Features

Sleek, ultra-low profile energy efficient LED surface mount downlights available in 11" and 13" sizes. Provides general illumination in residential and commercial applications including multi-family and hospitality. Ideal for use in corridors, living spaces, closets, hallways, pantries, stairways, outdoor covered areas and much more.

With the newly added selectable CCT switch, the JSF gives the ultimate in flexibility for both the distributor as well as the end user.

### Applications

- Suitable for wet locations (indoor/outdoor covered ceilings): perfect for closets, showers, bathrooms, outdoor soffits, and covered ceiling applications.
- Residential and Light Commercial applications including multi-family and hospitality
- Ideal for use in corridors, foyers, living spaces, closets, hallways, pantries, stairways and much more
- Installs directly into industry standard junction boxes
- Suitable for use within closet storage spaces when installed per NEC requirements. *Junction box sizes vary - Verify compatibility with fixture prior to installation*

### Performance

Delivered Lumens	JSF 11IN = 1300L JSF 13IN = 1800L
Led Color Temperature	Switchable White (2700K, 3000K, 3500K, 4000K, 5000K) Default set at 3000K
CRI	90+
Voltage	Dedicated 120V and MVOLT (120V-277V)
Dimming	Phase Dimming down to 10%. 0-10V and phase dimming available.

### Specifications

	Width	Depth
JSF 11IN	11.08 (28.14)	1.14 (2.9)
JSF 13IN	13.05 (33.15)	1.14 (2.9)

All dimensions are in Inches (centimeters unless otherwise indicated).



# Juno SlimForm™ LED with Selectable CCT

11" and 13" Round Downlight for JBox Installation



JSF

## ORDERING INFORMATION

### SlimForm LED Downlight

Example: JSF 11IN 13LM SWW5 90CRI 120FRPC WH

Series	Size/Lumens	Color Temperature	CRI	Voltage/Driver	Finish
<b>JSF</b> SlimForm Surface Mount Downlight - Round	<b>11IN 13LM</b> 11", 1300 Lumens <b>13IN 18LM</b> 13", 1800 Lumens	<b>SWW5</b> Switchable White (2700K, 3000K, 3500K, 4000K, 5000K)	<b>90CRI</b> 90+ CRI	<b>120 FRPC</b> Dedicated 120V, Forward Reverse Phase Dimming	<b>WH</b> White
	<b>120 ZT</b> Universal Voltage 120V-277V, 0-10V Dimming				



# Juno SlimForm™ LED with Selectable CCT

11" and 13" Round Downlight for JBox Installation



## Specifications

### Construction

Shallow, less than 1.2", solid ring with white finish • Non conductive construction allows for light shower applications

### Optics

Light guide technology combined with diffusing lens conceals the LEDs from direct view and provides uniform lens luminance.

### LED Light Engine

LEDs mounted directly to heatsink designed to provide superior thermal management and ensure long life • Selectable CCT with steps at 27K, 30K, 35K, 40K, 50K • LEDs binned for 4-step MacAdam ellipse color consistency • 90 CRI minimum.

### LED Driver

Choice of dedicated 120 volt (120) driver or universal voltage (MVOLT) driver that accommodates input voltages from 120-277 volts AC at 50/60Hz • Power factor > 0.9 at 120V input • 120 volt driver is dimmable with the use of most incandescent, magnetic low voltage and electronic low voltage wall box dimmers • Universal voltage driver is dimmable with the use of most 0-10V wall box dimmers • For a list of compatible dimmers, see [JUNOSLIMFORM-DIM](#).

### Installation

#### Junction Box Mounting

Fixture provided with leads for direct wire connection in j-box • Installs directly to industry standard junction boxes • Compatible boxes include 4" metal or plastic octagonal standard and IC1JB junction box housing (3 1/2" junction box screw-hole spacing required for installation) • Minimum 1 3/4" depth and 3" minimum diameter of clearance space in junction box required for installation of 11" and 13" fixtures • Quick mount bracket provides fast installation of fully assembled fixture to junction box • Suitable for ceiling mount • Suitable for use within closet storage spaces when installed per NEC requirements. Junction box sizes vary - Verify compatibility with fixture prior to installation

### Life

Rated for 50,000 hours at >70% lumen maintenance.

### Labels

ENERGY STAR® certified • Certified to the high efficacy requirements of California T24 JA8-2019 • CSA listed for US and Canada • Suitable for wet locations (covered ceilings).

### Testing

All reports are based on published industry procedures; field performance may differ from laboratory performance.

### Warranty

5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: [www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

**Note:** Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.



# Juno SlimForm™ LED with Selectable CCT


11" and 13" Round Downlight for JBox Installation



JSF


## PHOTOMETRICS

JSF 11IN 13LM SWW5 - 2700K Input Watts: 14.6, Delivered Lumens: 1393, LPW: 95.4, S/MH: 1.25, Test No: ISF 232429P1

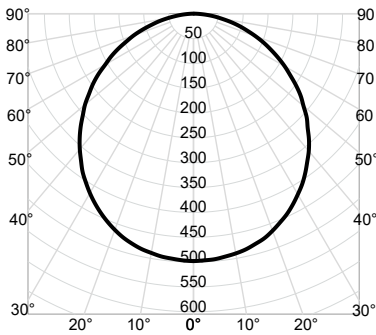


CP Summary	Zonal Lumen Summary				Coefficients of Utilization												Cone of Light			Luminance (cd/sq.m)		
					0°				pf	80%			20%			50%			Mounting Height	Initial FC Center Beam	Beam Diameter	Average Luminance
					Zone	Lumens	% Fixture	pc		50%	30%	10%	50%	30%	10%	50%	30%	10%				
0°	498	0° - 30°	387	28%	0	119	119	119	116	116	116	111	111	111	6.0	13.8	17.2	0°	10,664			
5°	496	0° - 40°	631	45%	1	104	100	96	102	98	94	97	94	91	8.0	7.8	22.9	45°	9,842			
15°	480	0° - 60°	1,101	79%	2	91	84	78	89	82	77	85	80	75	10.0	5.0	28.6	55°	9,408			
25°	445	0° - 90°	1,393	100%	3	80	71	65	78	70	64	75	68	63	12.0	3.5	34.3	65°	8,715			
35°	392	90° - 180°	0	0%	4	70	62	55	69	61	55	67	59	54	14.0	2.5	40.1	75°	7,860			
45°	325	0° - 180°	1,393	100%	5	63	54	47	62	53	47	60	52	47				85°	6,388			
55°	252				6	57	48	41	56	47	41	54	46	41								
65°	172				7	51	43	37	51	42	36	49	42	36								
75°	95				8	47	38	33	46	38	33	45	38	32								
85°	26				9	43	35	29	43	35	29	41	34	29								
90°	1				10	40	32	27	39	32	27	38	31	26								

JSF 11IN 13LM SWW5 - 3000K Input Watts: 14.5, Delivered Lumens: 1435, LPW: 99.0, S/MH: 1.25, Test No: ISF 232429P2

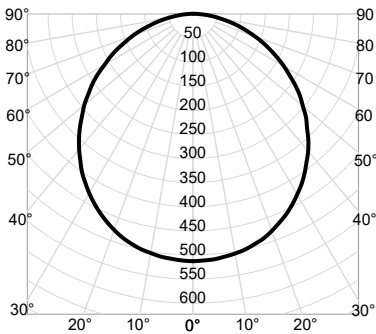

CP Summary	Zonal Lumen Summary				Coefficients of Utilization												Cone of Light			Luminance (cd/sq.m)		
					0°				pf	80%			20%			50%			Mounting Height	Initial FC Center Beam	Beam Diameter	Average Luminance
					Zone	Lumens	% Fixture	pc		50%	30%	10%	50%	30%	10%	50%	30%	10%				
0°	513	0° - 30°	399	28%	0	119	119	119	116	116	116	111	111	111	6.0	14.2	17.2	0°	10,984			
5°	511	0° - 40°	650	45%	1	104	100	96	102	98	94	97	94	91	8.0	8.0	22.9	45°	10,138			
15°	494	0° - 60°	1,134	79%	2	91	84	78	89	82	77	85	80	75	10.0	5.1	28.6	55°	9,691			
25°	458	0° - 90°	1,435	100%	3	80	71	65	78	70	64	75	68	63	12.0	3.6	34.3	65°	8,977			
35°	404	90° - 180°	0	0%	4	70	62	55	69	61	55	67	59	54	14.0	2.6	40.1	75°	8,096			
45°	335	0° - 180°	1,435	100%	5	63	54	47	62	53	47	60	52	47				85°	6,580			
55°	260				6	57	48	41	56	47	41	54	46	41								
65°	177				7	51	43	37	51	42	36	49	42	36								
75°	98				8	47	38	33	46	38	33	45	38	32								
85°	27				9	43	35	29	43	35	29	41	34	29								
90°	1				10	40	32	27	39	32	27	38	31	26								

JSF 11IN 13LM SWW5 - 3500K Input Watts: 14.3, Delivered Lumens: 1532, LPW: 107.1, S/MH: 1.25, Test No: ISF 232429P3

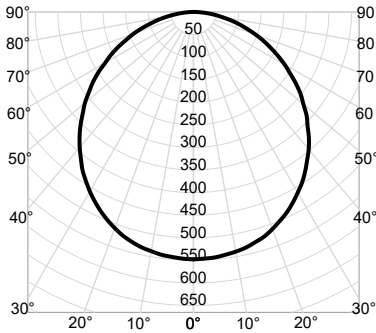

CP Summary	Zonal Lumen Summary				Coefficients of Utilization												Cone of Light			Luminance (cd/sq.m)		
					0°				pf	80%			20%			50%			Mounting Height	Initial FC Center Beam	Beam Diameter	Average Luminance
					Zone	Lumens	% Fixture	pc		50%	30%	10%	50%	30%	10%	50%	30%	10%				
0°	548	0° - 30°	426	28%	0	119	119	119	116	116	116	111	111	111	6.0	15.2	17.2	0°	11,731			
5°	546	0° - 40°	694	45%	1	104	100	96	102	98	94	97	94	91	8.0	8.6	22.9	45°	10,827			
15°	528	0° - 60°	1,212	79%	2	91	84	78	89	82	77	85	80	75	10.0	5.5	28.6	55°	10,349			
25°	490	0° - 90°	1,532	100%	3	80	71	65	78	70	64	75	68	63	12.0	3.8	34.3	65°	9,587			
35°	431	90° - 180°	0	0%	4	70	62	55	69	61	55	67	59	54	14.0	2.8	40.1	75°	8,646			
45°	358	0° - 180°	1,532	100%	5	63	54	47	62	53	47	60	52	47				85°	7,027			
55°	277				6	57	48	41	56	47	41	54	46	41								
65°	189				7	51	43	37	51	42	36	49	42	36								
75°	105				8	47	38	33	46	38	33	45	38	32								
85°	29				9	43	35	29	43	35	29	41	34	29								
90°	1				10	40	32	27	39	32	27	38	31	26								



# Juno SlimForm™ LED with Selectable CCT


11" and 13" Round Downlight for JBox Installation



JSF


## PHOTOMETRICS

JSF 11IN 13LM Sww5 - 4000K Input Watts: 14.4, Delivered Lumens: 1532, LPW: 106.4, S/MH: 1.25, Test No: ISF 232429P4

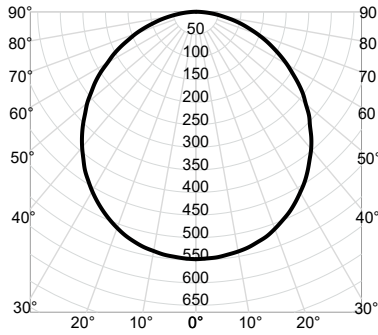

CP Summary	Zonal Lumen Summary				Coefficients of Utilization										Cone of Light			Luminance (cd/sq.m)		
					Average										Mounting Height	Initial FC Center Beam	Beam Diameter			
	0°	Zone	Lumens	% Fixture	pw	50%	80%	30%	10%	50%	30%	10%	50%	30%				10%	Average	
0°	548	0° - 30°	426	28%	0	119	119	119	116	116	116	111	111	111	111	6.0	15.2	17.2	0°	11,731
5°	546	0° - 40°	694	45%	1	104	100	96	102	98	94	97	94	91	91	8.0	8.6	22.9	45°	10,827
15°	528	0° - 60°	1,212	79%	2	91	84	78	89	82	77	85	80	75	75	10.0	5.5	28.6	55°	10,349
25°	490	0° - 90°	1,532	100%	3	80	71	65	78	70	64	75	68	63	63	12.0	3.8	34.3	65°	9,587
35°	431	90° - 180°	0	0%	4	70	62	55	69	61	55	67	59	54	54	14.0	2.8	40.1	75°	8,646
45°	358	0° - 180°	1,532	100%	5	63	54	47	62	53	47	60	52	47	47				85°	7,027
55°	277				6	57	48	41	56	47	41	54	46	41	41					
65°	189				7	51	43	37	51	42	36	49	42	36	36					
75°	105				8	47	38	33	46	38	33	45	38	32	32					
85°	29				9	43	35	29	43	35	29	41	34	29	29					
90°	1				10	40	32	27	39	32	27	38	31	26	26					

JSF 11IN 13LM Sww5 - 5000K Input Watts: 14.6, Delivered Lumens: 1560, LPW: 106.8, S/MH: 1.25, Test No: ISF 232429P5

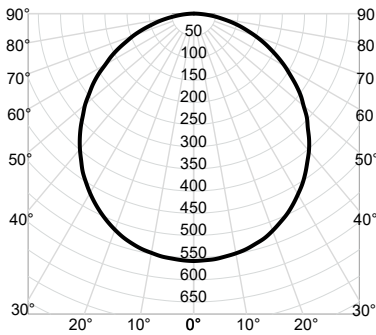

CP Summary	Zonal Lumen Summary				Coefficients of Utilization										Cone of Light			Luminance (cd/sq.m)		
					Average										Mounting Height	Initial FC Center Beam	Beam Diameter			
	0°	Zone	Lumens	% Fixture	pw	50%	80%	30%	10%	50%	30%	10%	50%	30%				10%	Average	
0°	558	0° - 30°	433	28%	0	119	119	119	116	116	116	111	111	111	111	6.0	15.5	17.2	0°	11,944
5°	556	0° - 40°	706	45%	1	104	100	96	102	98	94	97	94	91	91	8.0	8.7	22.9	45°	11,023
15°	538	0° - 60°	1,234	79%	2	91	84	78	89	82	77	85	80	75	75	10.0	5.6	28.6	55°	10,537
25°	498	0° - 90°	1,560	100%	3	80	71	65	78	70	64	75	68	63	63	12.0	3.9	34.3	65°	9,761
35°	439	90° - 180°	0	0%	4	70	62	55	69	61	55	67	59	54	54	14.0	2.8	40.1	75°	8,803
45°	364	0° - 180°	1,560	100%	5	63	54	47	62	53	47	60	52	47	47				85°	7,155
55°	282				6	57	48	41	56	47	41	54	46	41	41					
65°	193				7	51	43	37	51	42	36	49	42	36	36					
75°	106				8	47	38	33	46	38	33	45	38	32	32					
85°	29				9	43	35	29	43	35	29	41	34	29	29					
90°	1				10	40	32	27	39	32	27	38	31	26	26					



# Juno SlimForm™ LED with Selectable CCT


11" and 13" Round Downlight for JBox Installation



JSF

## PHOTOMETRICS


**JSF 13IN 18LM SWW5 - 2700K** Input Watts: 19.9, Delivered Lumens: 1884, LPW: 94.7, S/MH: 1.24, Test No: ISF 232449P1

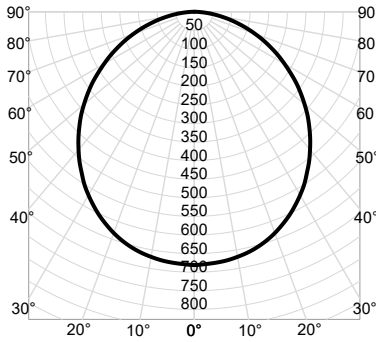

CP Summary	Zonal Lumen Summary				Coefficients of Utilization										Cone of Light			Luminance (cd/sq.m)	
	0°	Zone	Lumens	% Fixture	pw	80%		20%		50%		Mounting Height	Initial FC Center Beam	Beam Diameter	Average Luminance				
						50%	30%	10%	50%	30%	10%					50%	30%	10%	
0°	681	0° - 30°	528	28%	0	119	119	119	116	116	116	111	111	111	6.0	18.9	16.8	0°	10,127
5°	677	0° - 40°	858	46%	1	104	100	96	102	98	94	97	94	91	8.0	10.6	22.4	45°	9,190
15°	655	0° - 60°	1,494	79%	2	91	84	78	89	83	77	85	80	75	10.0	6.8	28.0	55°	8,685
25°	604	0° - 90°	1,884	100%	3	80	72	65	78	71	64	75	69	63	12.0	4.7	33.6	65°	7,988
35°	528	90° - 180°	0	0%	4	71	62	55	69	61	55	67	60	54	14.0	3.5	39.2	75°	7,010
45°	437	0° - 180°	1,884	100%	5	63	54	48	62	54	47	60	52	47				85°	5,289
55°	335				6	57	48	42	56	47	41	54	47	41					
65°	227				7	52	43	37	51	42	37	49	42	36					
75°	122				8	47	39	33	46	38	33	45	38	32					
85°	31				9	43	35	30	43	35	29	42	34	29					
90°	0				10	40	32	27	39	32	27	38	31	27					

Beam Angle: 108.9°  
Field Angle: 161.3°


**JSF 13IN 18LM SWW5 - 3000K** Input Watts: 19.8, Delivered Lumens: 1941, LPW: 98.0, S/MH: 1.24, Test No: ISF 232449P2

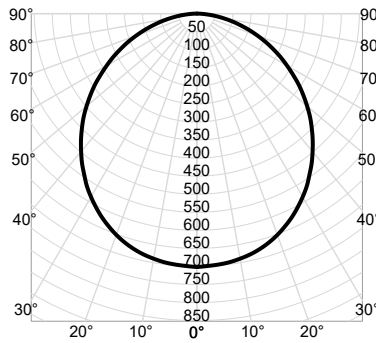

CP Summary	Zonal Lumen Summary				Coefficients of Utilization										Cone of Light			Luminance (cd/sq.m)	
	0°	Zone	Lumens	% Fixture	pw	80%		20%		50%		Mounting Height	Initial FC Center Beam	Beam Diameter	Average Luminance				
						50%	30%	10%	50%	30%	10%					50%	30%	10%	
0°	701	0° - 30°	544	28%	0	119	119	119	116	116	116	111	111	111	6.0	19.5	16.8	0°	10,431
5°	697	0° - 40°	884	46%	1	104	100	96	102	98	94	97	94	91	8.0	11.0	22.4	45°	9,466
15°	675	0° - 60°	1,538	79%	2	91	84	78	89	83	77	85	80	75	10.0	7.0	28.0	55°	8,946
25°	622	0° - 90°	1,941	100%	3	80	72	65	78	71	64	75	69	63	12.0	4.9	33.6	65°	8,227
35°	544	90° - 180°	0	0%	4	71	62	55	69	61	55	67	60	54	14.0	3.6	39.2	75°	7,220
45°	450	0° - 180°	1,941	100%	5	63	54	48	62	54	47	60	52	47				85°	5,448
55°	345				6	57	48	42	56	47	41	54	47	41					
65°	234				7	52	43	37	51	42	37	49	42	36					
75°	126				8	47	39	33	46	38	33	45	38	32					
85°	32				9	43	35	30	43	35	29	42	34	29					
90°	0				10	40	32	27	39	32	27	38	31	27					

Beam Angle: 108.9°  
Field Angle: 161.3°

**JSF 13IN 18LM SWW5 - 3500K** Input Watts: 19.5, Delivered Lumens: 2035, LPW: 104.4, S/MH: 1.24, Test No: ISF 232449P3

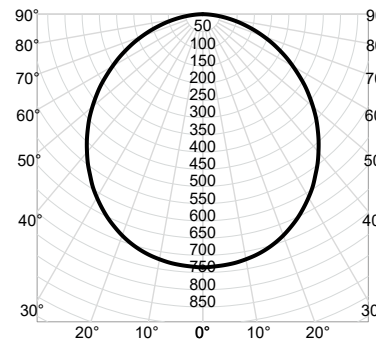

CP Summary	Zonal Lumen Summary				Coefficients of Utilization										Cone of Light			Luminance (cd/sq.m)	
	0°	Zone	Lumens	% Fixture	pw	80%		20%		50%		Mounting Height	Initial FC Center Beam	Beam Diameter	Average Luminance				
						50%	30%	10%	50%	30%	10%					50%	30%	10%	
0°	735	0° - 30°	570	28%	0	119	119	119	116	116	116	111	111	111	6.0	20.4	16.8	0°	10,937
5°	731	0° - 40°	927	46%	1	104	100	96	102	98	94	97	94	91	8.0	11.5	22.4	45°	9,926
15°	707	0° - 60°	1,613	79%	2	91	84	78	89	83	77	85	80	75	10.0	7.4	28.0	55°	9,380
25°	652	0° - 90°	2,035	100%	3	80	72	65	78	71	64	75	69	63	12.0	5.1	33.6	65°	8,627
35°	570	90° - 180°	0	0%	4	71	62	55	69	61	55	67	60	54	14.0	3.8	39.2	75°	7,571
45°	472	0° - 180°	2,035	100%	5	63	54	48	62	54	47	60	52	47				85°	5,713
55°	362				6	57	48	42	56	47	41	54	47	41					
65°	245				7	52	43	37	51	42	37	49	42	36					
75°	132				8	47	39	33	46	38	33	45	38	32					
85°	33				9	43	35	30	43	35	29	42	34	29					
90°	0				10	40	32	27	39	32	27	38	31	27					

Beam Angle: 108.9°  
Field Angle: 161.3°



# Juno SlimForm™ LED with Selectable CCT


11" and 13" Round Downlight for JBox Installation



JSF


## PHOTOMETRICS

JSF 13IN 18LM SWW5 - 4000K Input Watts: 19.6, Delivered Lumens: 2091, LPW: 106.7, S/MH: 1.24, Test No: ISF 232449P4

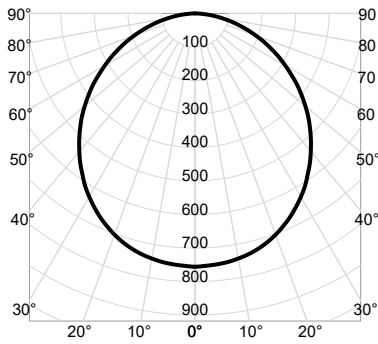

CP Summary	Zonal Lumen Summary				Coefficients of Utilization										Cone of Light			Luminance (cd/sq.m)	
	Zone	Lumens	% Fixture	pw	80%		20%		50%		Mounting Height	Initial FC Center Beam	Beam Diameter	Average Luminance					
					50%	30%	10%	50%	30%	10%						50%	30%	10%	
0°	0° - 30°	586	28%	0	119	119	119	116	116	116	111	111	111	6.0	21.0	16.8	0°	11,241	
5°	0° - 40°	952	46%	1	104	100	96	102	98	94	97	94	91	8.0	11.8	22.4	45°	10,201	
15°	0° - 60°	1,658	79%	2	91	84	78	89	83	77	85	80	75	10.0	7.6	28.0	55°	9,641	
25°	0° - 90°	2,091	100%	3	80	72	65	78	71	64	75	69	63	12.0	5.2	33.6	65°	8,866	
35°	90° - 180°	0	0%	4	71	62	55	69	61	55	67	60	54	14.0	3.9	39.2	75°	7,781	
45°	0° - 180°	2,091	100%	5	63	54	48	62	54	47	60	52	47				85°	5,871	
55°		372		6	57	48	42	56	47	41	54	47	41						
65°		252		7	52	43	37	51	42	37	49	42	36						
75°		135		8	47	39	33	46	38	33	45	38	32						
85°		34		9	43	35	30	43	35	29	42	34	29						
90°		0		10	40	32	27	39	32	27	38	31	27						

JSF 13IN 18LM SWW5 - 5000K Input Watts: 19.9, Delivered Lumens: 2110, LPW: 106.0, S/MH: 1.24, Test No: ISF 232449P5

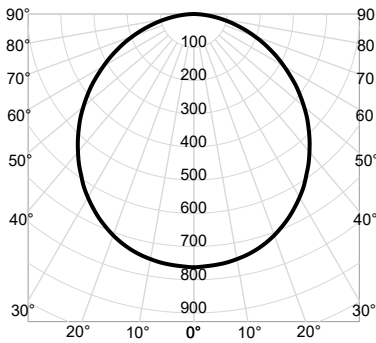

CP Summary	Zonal Lumen Summary				Coefficients of Utilization										Cone of Light			Luminance (cd/sq.m)	
	Zone	Lumens	% Fixture	pw	80%		20%		50%		Mounting Height	Initial FC Center Beam	Beam Diameter	Average Luminance					
					50%	30%	10%	50%	30%	10%						50%	30%	10%	
0°	0° - 30°	591	28%	0	119	119	119	116	116	116	111	111	111	6.0	21.2	16.8	0°	11,342	
5°	0° - 40°	961	46%	1	104	100	96	102	98	94	97	94	91	8.0	11.9	22.4	45°	10,293	
15°	0° - 60°	1,673	79%	2	91	84	78	89	83	77	85	80	75	10.0	7.6	28.0	55°	9,728	
25°	0° - 90°	2,110	100%	3	80	72	65	78	71	64	75	69	63	12.0	5.3	33.6	65°	8,946	
35°	90° - 180°	0	0%	4	71	62	55	69	61	55	67	60	54	14.0	3.9	39.2	75°	7,851	
45°	0° - 180°	2,110	100%	5	63	54	48	62	54	47	60	52	47				85°	5,924	
55°		375		6	57	48	42	56	47	41	54	47	41						
65°		254		7	52	43	37	51	42	37	49	42	36						
75°		137		8	47	39	33	46	38	33	45	38	32						
85°		35		9	43	35	30	43	35	29	42	34	29						
90°		0		10	40	32	27	39	32	27	38	31	27						