



Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

4" IC 900 LUMEN LED DOWNLIGHT NEW CONSTRUCTION

IC 1 LED (G4 09LM) RECESSED HOUSING

LENSED TRIMS



PRODUCT DESCRIPTION

Dedicated LED, Air-Loc® sealed new construction housing with integral light engine • Double wall, shallow housing construction allows for fit in 2 x 6 construction • Can be completely covered with insulation • Fully sealed housing stops infiltration and exfiltration of air, reducing heating and air cooling costs without the use of additional gaskets • LED housing is designed to provide 50,000 hours of life and is compatible with many standard Juno trims • 5 year limited warranty on LED components.

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT

- No harmful ultraviolet or infrared wavelengths
- No lead or mercury, RoHS compliant
- Comparable light output to 75W incandescent

PRODUCT SPECIFICATIONS

LED Light Engine LED array attached to high purity aluminum, thermally conductive inner housing provides superior heat transfer to ensure long life of the LED • Replaceable light engine mounts directly to inner housing assembly and incorporates the latest generation, high lumen output LED array • LEDs are binned within a 3-step MacAdam Ellipse exceeding ENERGY STAR® requirements for superior fixture to fixture color uniformity • 2700K, 3000K, 3500K, or 4000K color temperatures available • 90 CRI minimum.

Optical System Computer-optimized reflector design with high reflectance finish coupled with a high transmission diffusing lens conceals the LEDs and produces uniform aperture luminance.

Aesthetic Trim Selections Compatible with wide selection of existing Juno trims • Shadow free, knife edge design blends seamlessly into ceiling. • Trims are wet location approved for covered ceiling applications.

LED Driver Choice of dedicated 120 volt (120) driver or universal voltage (MVOLT) driver that accommodates input voltages from 120-277 volts AC at 50/60Hz • Power factor > 0.9 at 120V input • 120 volt only driver is dimmable with the use of most incandescent, magnetic low voltage and electronic low voltage wall box dimmers • Universal voltage driver is dimmable with the use of most 0-10V wall box dimmers • For a list of compatible dimmers, see [JUNOICLED-DIM](#) • Mounted inside housing for easy access from below ceiling.

Life Rated for 50,000 hours at 70% lumen maintenance.

Labels ENERGY STAR® Certified when used with select trims • Certified to the high efficacy requirements of California T24 JA8-2016 with select trims • UL listed for U.S. and Canada through-branch wiring, wet locations (covered ceilings) • Union made • UL and cUL.

Testing All reports are based on published industry procedures; field performance may differ from laboratory performance.

Product specifications subject to change without notice.

HOUSING FEATURES



Housing Designed for use in IC (insulated ceiling) or non-IC construction • Aluminum housing sealed for Air-Loc® compliance • Housing is vertically adjustable to accommodate up to a 1 1/2" ceiling thickness.

Junction Box Pre-wired junction box provided with (6) 1/2" and (1) 3/4" knockouts, (4) knockouts for 12/2 or 14/2 NM cable and ground wire • UL listed and cUL listed for through-branch wiring, maximum 4 #12 branch circuit conductors • Junction box provided with removable access plates • Knockouts equipped with pryout slots • Quick connect electrical connectors supplied as standard for fast, secure installation.

Mounting Frame 22-gauge die-formed galvanized steel mounting frame • Rough-in section (junction box, mounting frame, housing and bar hangers) fully assembled for ease of installation.

Real Nail 3 Bar Hangers Patented (US Patent D552,969) Real Nail® 3 bar hangers: telescoping system permits quick placement of housing anywhere within 24" O.C. joists or suspended ceilings • Includes removable nail for repositioning of fixture in wood joist construction • Integral T-bar notch and clip for suspended ceilings.

DIMENSIONS

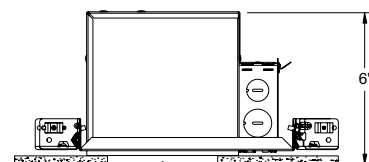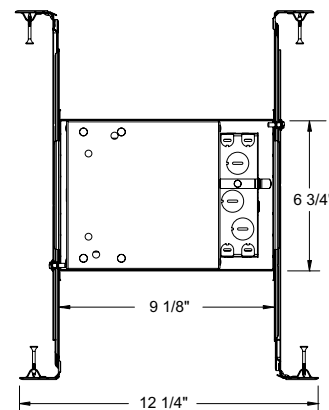

4 1/2" CEILING CUTOUT

ELECTRICAL DATA

Dedicated 120V Only Driver Option

120V	
Input Power	11.6W (+/-5%)
Input Current	0.10A
Frequency	50/60Hz
EMI/RFI	FCC Title 47 CFR, Part 15, Class B (residential)
Minimum starting temp	-25°C

ELECTRICAL DATA

Universal Voltage

	120V	277V
Input Power	12.5W (+/-5%)	12.8W (+/-5%)
Input Current	0.11A	0.07A
Frequency	50/60Hz	50/60Hz
EMI/RFI	FCC Title 47 CFR, Part 15, Class A (non-consumer)	FCC Title 47 CFR, Part 15, Class A (non-consumer)
Minimum starting temp	-40°C	-40°C

4" IC 900 LUMEN LED DOWNLIGHT NEW CONSTRUCTION

IC1LED (G4 09LM) RECESSED HOUSING LENSED TRIMS

ORDERING INFORMATION Housing and trim can be ordered together or separate, but will always ship separately.

Example: IC1LED G4 09LM 27K 90CRI 120 FRPC

Series	Generation	Lumens	Color Temperature	CRI	Voltage	Driver
IC1LED 4" LED IC New Construction Downlight	G4 Generation 4	09LM 900 Nominal Lumens	27K 2700K 30K 3000K 35K 3500K 40K 4000K	90CRI 90+ CRI	120 120V MVOLT Multi-Volt (120-277V)	FRPC Forward/Reverse Phase Cut ZT 0-10V Dimming Driver

Notes: Order 120 with FRPC only, Order MVOLT with ZT only.

Trim/Description



11 WH 4" Lensed Drop Opal Trim - White



12 WABZ¹ 4" Frosted Lens with Clear Center Trim - Perimeter Frosted Lens, Classic Aged Bronze Trim Ring

12 WSC¹ 4" Frosted Lens with Clear Center Trim - Perimeter Frosted Lens, Satin Chrome Trim Ring

12 WWH¹ 4" Frosted Lens with Clear Center Trim - White, White Trim Ring



4101 ABZ¹

4" Decorative Beveled Dome Lens Trim - Classic Aged Bronze

4101 SC¹

4" Decorative Beveled Dome Lens Trim - Satin Chrome

4101 WH¹

4" Decorative Beveled Dome Lens Trim - White



4102 ABZ

4" Decorative Beveled Lens Trim - Classic Aged Bronze

4102 SC

4" Decorative Beveled Lens Trim - Satin Chrome

4102 WH

4" Decorative Beveled Lens Trim - White

Trim Size: 5" O.D.

Note: In Canada when insulation is present, Type IC fixtures must be used.

UL Listed for use in wet location.

¹ Multi-Volt: T24 @ 30K, 35K and 40K only

4" IC 900 LUMEN LED DOWNLIGHT NEW CONSTRUCTION

IC1LED (G4 09LM) RECESSED HOUSING
LENSED TRIMS

PHOTOMETRICS

PHOTOMETRIC REPORT


Test Report #: PT08111601R

Catalog No: IC1LED G4 09LM 35K

90CRI 120 with 12 WWH Trim

Luminaire Spacing Criterion: 0.58

Luminaire LPW: 62



CANDLEPOWER DISTRIBUTION (Candelas)

Degrees Vertical	0°
0	1195
5	1100
15	703
25	352
35	161
45	80
55	44
65	28
75	15
85	3
90	0

Multiplier: 27K - 0.89
30K - 0.94
40K - 1.03

AVERAGE INITIAL FOOTCANDLES

Multiple Units (Square Array, 60'x60' room)

Ceiling 80% Wall 50% Floor 20%

Spacing	RCR1	RCR3	RCR5
4.0'	49	42	36
5.0'	31	27	23
6.0'	22	19	16
7.0'	18	15	13
8.0'	14	12	10
9.0'	11	9	8
10.0'	8	7	6

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixture
0 - 30°	461	N/A	64.3
0 - 40°	565	N/A	78.8
0 - 60°	669	N/A	93.4
0 - 90°	717	N/A	100.0

INITIAL FOOTCANDLES

(One Unit, 11.6W, 35.5° Beam)

Distance to Illuminated Plane (Feet)	Footcandles Beam Center	Beam Diameter
4	74.7	2.6'
6	33.2	3.8'
8	18.7	5.1'
10	12.0	6.4'

LUMINANCE (Average cd/m²)

Degrees	Average Luminance
45	18089
55	12473
65	10772
75	9214
85	4975

Fixtures tested to IES recommended standard for solid state lighting per LM-79-08. Photometric performance on a single unit represents a baseline of performance for the fixture. Results may vary in the field.