

JUNO

4" IC 600 LUMEN WARMDIM® LED DOWNLIGHT NEW CONSTRUCTION

Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

IC1LED (WD G4N 06LM) RECESSED HOUSING

**LENSED TRIMS****PRODUCT DESCRIPTION**

Dedicated LED, Air-Loc® sealed new construction housing with patented WarmDim® technology • LED color temperature warms while dimming to emulate the dimming performance of traditional incandescent light sources • Double wall, shallow housing construction allows for fit in 2 x 6 construction • Can be completely covered with insulation • Fully sealed housing stops infiltration and exfiltration of air, reducing heating and air cooling costs without the use of additional gaskets • LED housing is designed to provide 50,000 hours of life and is compatible with many standard Juno trims • 5 year limited warranty on LED components.

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT

- No harmful ultraviolet or infrared wavelengths
- No lead or mercury, RoHS compliant
- Comparable light output to 65W incandescent while consuming 12W

PRODUCT SPECIFICATIONS

LED Light Engine Proprietary patented micro processor controlled light engine emulates dimming performance of incandescent light source • Replaceable light engine attached to high purity aluminum, thermally conductive inner housing provides superior heat transfer to ensure long life of the LEDs • 3000K color temperature at full lumen output • 90 CRI minimum throughout dimming range • Design covered under Patent US 8,710,754.

Optical System Computer-optimized reflector design with high reflectance finish coupled with a high transmission diffusing lens conceals the LEDs and produces uniform aperture luminance.

Aesthetic Trim Selections Compatible with wide selection of existing Juno trims • Shadow free, knife edge design blends seamlessly into ceiling • Trims are wet location approved for covered ceiling applications.

LED Driver Dedicated 120 volt driver • Power factor > 0.9 • Dimmable with the use of most incandescent, magnetic low voltage and electronic low voltage wall box dimmers • For a list of compatible dimmers, see [JUNOICLED-DIM](#) • Mounted inside housing for easy access from below ceiling.

Life Rated for 50,000 hours at 70% lumen maintenance.

Labels Certified to the high efficacy requirements of California T24 JA8-2016 with select trims • UL listed for U.S. and Canada, through-branch wiring, wet locations (covered ceilings) • Union made • UL and cUL.

Testing All reports are based on published industry procedures; field performance may differ from laboratory performance.

Product specifications subject to change without notice.



HOUSING FEATURES

Housing Designed for use in IC (insulated ceiling) or non-IC construction • Aluminum housing sealed for Air-Loc® compliance • Housing is vertically adjustable to accommodate up to a 1½" ceiling thickness.

Junction Box Pre-wired junction box provided with (6) ½" and (1) ¾" knockouts, (4) knockouts for 12/2 or 14/2 NM cable and ground wire • UL listed and cUL listed for through-branch wiring, maximum 6 #12 branch circuit conductors • Junction box provided with removable access plates • Knockouts equipped with pryout slots • Quick connect electrical connectors supplied as standard for fast, secure installation.

Mounting Frame 22-gauge die-formed galvanized steel mounting frame • Rough-in section (junction box, mounting frame, housing and bar hangers) fully assembled for ease of installation.


Real Nail 3 Bar Hangers Telescoping Real Nail® 3 system permits quick placement of housing anywhere within 24" O.C. joists or suspended ceilings • Includes removable nail for repositioning of fixture in wood joist construction • Integral T-bar notch and clip for suspended ceilings • Design covered under US Patent D552,969.

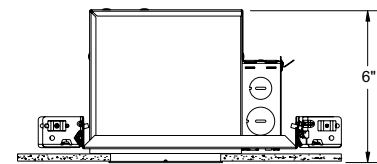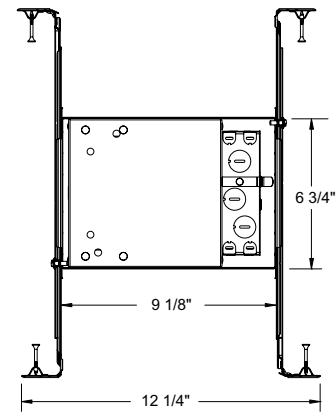**DIMENSIONS**

4 1/2" CEILING CUTOUT

ELECTRICAL DATA**Dedicated 120V Only Driver**

120V	
Input Power	10W (+/- 5%)
Input Current	0.08A
Frequency	50/60 Hz
EMI/RFI	FCC Title 47 CFR, Part 15 Class B (residential)
Minimum starting temp	-20°C

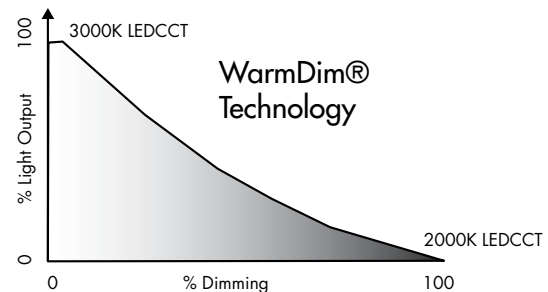

4" IC 600 LUMEN WARMDIM® LED DOWNLIGHT NEW CONSTRUCTION

IC1LED (WD G4N 06LM) RECESSED HOUSING
LENSED TRIMS

ORDERING INFORMATION Housing and trim can be ordered together or separate, but will always ship separately.

Example: IC1LED WD G4N 06LM 30K 90CRI 120 FRPC

Series	Dynamic Feature	Generation	Lumens	Color Temperature	CRI	Voltage	Driver
IC1LED 4" LED IC New Construction Downlight	WD Warm Dim	G4N Generation 4 New	06LM 600 Nominal Lumens	30K 3000K	90CRI 90+ CRI	120 120V	FRPC Forward/Reverse Phase Cut

Trim/Description



11 WH 4" Lensed Drop Opal Trim - White



12 WABZ¹ 4" Frosted Lens with Clear Center Trim - Perimeter Frosted Lens, Classic Aged Bronze Trim Ring

12 WSC¹ 4" Frosted Lens with Clear Center Trim - Perimeter Frosted Lens, Satin Chrome Trim Ring

12 WWH¹ 4" Frosted Lens with Clear Center Trim - White, White Trim Ring



4101 ABZ¹ 4" Decorative Beveled Dome Lens Trim - Classic Aged Bronze

4101 SC¹ 4" Decorative Beveled Dome Lens Trim - Satin Chrome

4101 WH¹ 4" Decorative Beveled Dome Lens Trim - White



4102 ABZ 4" Decorative Beveled Lens Trim - Classic Aged Bronze

4102 SC 4" Decorative Beveled Lens Trim - Satin Chrome

4102 WH 4" Decorative Beveled Lens Trim - White

Trim Size: 5" O.D.

Note: In Canada when insulation is present, Type IC fixtures must be used.

UL Listed for use in wet location.

¹ Multi-Volt: T24 @ 30K, 35K and 40K only

4" IC 600 LUMEN WARMDIM® LED DOWNLIGHT NEW CONSTRUCTION

IC1LED (WD G4N 06LM) RECESSED HOUSING
LENSED TRIMS


PHOTOMETRICS

PHOTOMETRIC REPORT

Test Report #: PT09141904
Catalog No: IC1LED WD G4N 06LM 30K
with 12 WWH Trim

Luminaire Spacing Criterion: 0.76

Luminaire LPW: 66



CANDLEPOWER DISTRIBUTION (Candelas)

Degrees	Vertical	0°
0	Vertical	739
5		728
15		587
25		343
35		170
45		89
55		50
65		29
75		13
85		1
90		0

AVERAGE INITIAL FOOTCANDLES

Multiple Units (Square Array, 60'x60' room)

Ceiling 80% Wall 50% Floor 20%

Spacing	RCR1	RCR3	RCR5
4.0'	45	37	32
5.0'	29	24	20
6.0'	20	17	14
7.0'	16	13	11
8.0'	13	11	9
9.0'	10	8	7
10.0'	7	6	5

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixture
0-30°	387	N/A	59.1
0-40°	496	N/A	75.6
0-60°	611	N/A	93.2
0-90°	655	N/A	100.0

INITIAL FOOTCANDLES (One Unit, 10W, 47.8° Beam)

Distance to Illuminated Plane (Feet)	Footcandles Beam Center	Beam Diameter
4	46.2	3.5'
6	20.5	5.3'
8	11.5	7.1'
10	7.4	8.9'

LUMINANCE (Average cd/m²)

Degrees	Average Luminance
45	20446
55	14306
65	11056
75	8052
85	2242

Fixtures tested to IES recommended standard for solid state lighting per LM-79-08. Photometric performance on a single unit represents a baseline of performance for the fixture. Results may vary in the field.