



Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

4" IC AND TC 700 LUMEN INTERNALLY ADJUSTABLE LED DOWNLIGHT REMODEL

IC4RAL, TC4RAL (07LM) RECESSED HOUSING
ANGLE CUT TRIMS



PRODUCT DESCRIPTION

Patent pending dedicated LED, Air-Loc® remodel housing with integral internally adjustable light engine • IC4RAL series can be completely covered with insulation and installs in shallow 2 x 6 construction • TC4RAL series for use in non-insulated areas (If installed where insulation is present, the insulation must be pulled back 3" from all sides of the TC housing) • Remodel housing for remodel application where back side of ceiling is not accessible • Installs through an opening in the ceiling from below • Secured in place by factory installed remodel springs • LED housing is designed to provide 50,000 hours of life • 5 year limited warranty on LED components.

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT

- No harmful ultraviolet or infrared wavelengths
- No lead or mercury, RoHS compliant
- Comparable light output to 65W incandescent

PRODUCT SPECIFICATIONS

LED Light Engine LED array attached to cast aluminum sliding heatsink integrated directly with housing provides superior heat transfer to ensure long life of the LED • Replaceable light engine mounts directly to inner housing assembly and incorporates the latest generation, high lumen output LED array • LEDs are binned within a 3-step MacAdam Ellipse exceeding ENERGY STAR® requirements for superior fixture to fixture color uniformity • 2700K, 3000K, 3500K, or 4000K color temperatures available • 90 CRI minimum.

Optics Three field interchangeable, TIR optics available in 18°, 30° and 40° beam angles • Module can accommodate one 2-inch diameter beam control lens or filter • Adjustable light engine module provides up to 35° vertical adjustment and 360° rotation.

Aesthetic Trim Selections Aluminum angle-cut reflector in clear, black, pewter, white, haze and wheat haze • Shadow free, knife edge design blends seamlessly into ceiling.

LED Driver Choice of dedicated 120 volt (120) driver or universal voltage (MVOLT) driver that accommodates input voltages from 120-277 volts AC at 50/60Hz • Power factor > 0.9 at 120V input • 120 volt only driver is dimmable with the use of most incandescent, magnetic low voltage and electronic low voltage wall box dimmers • Universal voltage driver is dimmable with the use of most 0-10V wall box dimmers • For a list of compatible dimmers, see [JUNOICLED-DIM](#).

Life Rated for 50,000 hours at 70% lumen maintenance.

Labels ENERGY STAR® Certified • Certified to the high efficacy requirements of California T24 JA8-2016 • UL listed for U.S. and Canada for damp locations • Union made • UL and cUL.

Testing All reports are based on published industry procedures; field performance may differ from laboratory performance.

Specifications subject to change without notice.


HOUSING FEATURES

Housing IC4RAL designed for use in IC (insulated ceiling) or non-IC construction • TC4RAL designed for use in non-IC construction • Aluminum housing sealed for Air-Loc® compliance • Housing is vertically adjustable to accommodate up to a 1 1/2" ceiling thickness.

Junction Box Pre-wired junction box provided with (5) 1/2" knockouts, (4) knockouts for 12/2 or 14/2 NM cable and ground wire • Junction box provided with removable access plates • Knockouts equipped with pryout slots • Quick connect electrical connectors supplied as standard for fast, secure installation.



DIMENSIONS

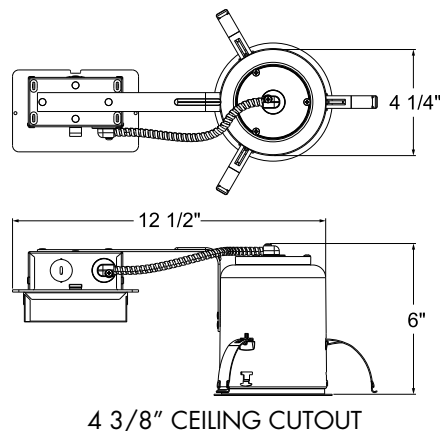

ELECTRICAL DATA

Dedicated 120V Only Driver Option (120) 120V

Input Power	10.5W (+/-5%)
Input Current	0.10A
Frequency	50/60Hz
EMI/RFI	FCC Title 47 CFR, Part 15, Class B (Residential)
Minimum starting temp	-25°C (-13°F)

Universal Voltage Driver (MVOLT ZT)

	120V	277V
Input Power	10.0W (+/-5%)	10.0W (+/-5%)
Input Current	0.04A	0.09A
Frequency	50/60Hz	50/60Hz
EMI/RFI	FCC Title 47 CFR, Part 15, Class A (Commercial)	FCC Title 47 CFR, Part 15, Class A (Commercial)
Minimum starting temp	-20°C (-4°F)	-20°C (-4°F)

Lutron Hi-Lume® LED Driver (MVOLT ECOS3)

	120V	277V
Input Power	11.1W (+/-5%)	11.3W (+/-5%)
Input Current	0.10A	0.05A
Frequency	50/60Hz	50/60Hz
EMI/RFI	FCC Title 47 CFR, Part 15, Class A (Commercial)	FCC Title 47 CFR, Part 15, Class A (Commercial)
Minimum starting temp	0°C (32°F)	0°C (32°F)

4" IC AND TC 700 LUMEN INTERNALLY ADJUSTABLE LED DOWNLIGHT REMODEL

IC4RAL (07LM), TC4RAL (07LM) RECESSED HOUSING ANGLE CUT TRIMS

ORDERING INFORMATION Housing and trim can be ordered together or separate, but will always ship separately.

Example: IC4RAL 07LM 30K 90CRI FL 120 FRPC

Series	Lumens	Color Temperature	CRI	Distribution	Voltage	Driver
IC4RAL 4" LED Internally Adjustable Remodel IC Downlight	07LM 700 Nominal Lumens	27K 2700K 30K 3000K 35K 3500K 40K 4000K	90CRI 90+ CRI	FL Flood NFL Narrow Flood SP Spot	120 120V MVOLT Multi-Volt (120-277V)	FRPC Forward/ Reverse Phase Cut ZT 0 - 10V Dimming Driver

Example: TC4RAL 07LM 30K 90CRI FL MVOLT ECOS3

Notes: 120 must be ordered with FRPC. MVOLT must be ordered with ZT

Series	Lumens	Color Temperature	CRI	Distribution	Voltage	Driver
TC4RAL 4" LED Internally Adjustable Remodel Non IC Downlight	07LM 700 Nominal Lumens	27K 2700K 30K 3000K 35K 3500K 40K 4000K	90CRI 90+ CRI	FL Flood NFL Narrow Flood SP Spot	MVOLT Multi-Volt	ECOS3 Lumen Hi - Lume A Series, 3-wire fluorescent controls & Lutron Ecosystem

Trim/Description



47L BWH	4" Adjustable Angle Cut Coned Trim - Black Alzak® Cone, White Trim Ring
47L CWH	4" Adjustable Angle Cut Coned Trim - Clear Alzak® Cone, White Trim Ring
47L HZWH	4" Adjustable Angle Cut Coned Trim - Haze Cone, White Trim Ring
47L PTSC	4" Adjustable Angle Cut Coned Trim - Pewter Alzak® Cone, Satin Chrome Trim Ring
47L WHZABZ	4" Adjustable Angle Cut Coned Trim - Wheat Haze Cone, Classic Aged Bronze Trim Ring
47L WHZWH	4" Adjustable Angle Cut Coned Trim - Wheat Haze Cone, White Trim Ring
47L WWH	4" Adjustable Angle Cut Coned Trim - Gloss White Cone, White Trim Ring

Trim Size: 5" O.D.

Alzak is a registered trademark of Alcoa Corp.

Note: In Canada when insulation is present, Type IC fixtures must be used.

Accessories (ordered separately)

Catalog Number	Description
CGF 200 MPINK	Color Glass Filter - 2" Diameter - Medium Pink
CGF 200 WRED	Color Glass Filter - 2" Diameter - Warm Red
CGF 200 DLTBLUE	Color Glass Filter - 2" Diameter - Daylight Blue
CGF 200 MBLU	Color Glass Filter - 2" Diameter - Medium Blue
CGF 200 MAMB	Color Glass Filter - 2" Diameter - Medium Amber
CGF 200 MGRN	Color Glass Filter - 2" Diameter - Medium Green
DGF 200 DRED	Dichroic Glass Filter - 2" Diameter Red
DGF 200 MGRN	Dichroic Glass Filter - 2" Diameter Medium Green
DGF 200 MBLU	Dichroic Glass Filter - 2" Diameter Medium Blue
DGF 200 DYEL	Dichroic Glass Filter - 2" Diameter Yellow (Dichroic)
DGF 200 MAGEN	Dichroic Glass Filter - 2" Diameter Magenta
DGF 200 CYAN	Dichroic Glass Filter - 2" Diameter Cyan
DCCF 200 HL4250	Dichroic Color Correction Filter - 2" Diameter - Halogen - to - Daylight
DIFF 200	Diffusion Glass Lens - 2" Diameter
UVF 200	UV Filter Lens - 2" Diameter
HCLBL 200	Hexagonal Cell Louver - Black - 2" Diameter
LSPREAD 200	Linear Spread Glass Lens - 2" Diameter
PRISM 200	Prismatic Glass Lens - 2" Diameter
TIR2 SPT	TIR Optic - Spot
TIR2 NFLD	TIR Optic - Narrow Flood
TIR2 FLD	TIR Optic - Flood

4" IC AND TC 700 LUMEN INTERNALLY ADJUSTABLE LED DOWNLIGHT REMODEL

IC4RAL (07LM), TC4RAL (07LM) RECESSED HOUSING
ANGLE CUT TRIMS

PHOTOMETRIC REPORT


Test Report: PT09153001R

Catalog No: IC4AL 07LM 35K 90CRI
SP 120 FRPC with 47L HZWH and Spot
Optic

Watts: 10.5

Lumens: 799

Luminaire LPW: 76

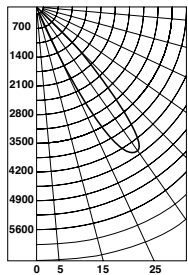

Candlepower Distribution

(Candelas)

Degrees	Vertical	Candela
0°	135	
5°	193	
10°	320	
15°	571	
20°	979	
25°	1908	
30°	3570	
35°	4589	
40°	3376	
45°	1694	
50°	833	
55°	486	
60°	167	
65°	40	
70°	15	
75°	5	
80°	0	
85°	0	
90°	0	

PHOTOMETRIC REPORT


Test Report: PT09152921R

Catalog No: IC4AL 07LM 35K 90CRI
NFL 120 FRPC with 47L HZWH and
Narrow Flood Optic

Watts: 10.5

Lumens: 809

Luminaire LPW: 77

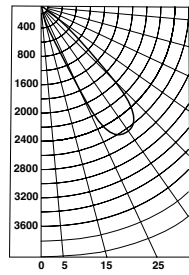

Candlepower Distribution

(Candelas)

Degrees	Vertical	Candela
0°	131	
5°	199	
10°	297	
15°	561	
20°	1203	
25°	2004	
30°	2488	
35°	2637	
40°	2434	
45°	2225	
50°	1201	
55°	589	
60°	228	
65°	70	
70°	33	
75°	11	
80°	1	
85°	0	
90°	0	

PHOTOMETRIC REPORT


Test Report: PT09152901R

Catalog No: IC4AL 07LM 35K 90CRI
FL 120 FRPC with 47L HZWH and Flood
Optic

Watts: 10.5

Lumens: 835

Luminaire LPW: 80



Candlepower Distribution


(Candelas)




Degrees	Vertical	Candela
0°	164	
5°	293	
10°	518	
15°	831	
20°	1232	
25°	1611	
30°	1858	
35°	1923	
40°	1790	
45°	1501	
50°	1105	
55°	721	
60°	345	
65°	164	
70°	65	
75°	19	
80°	0	
85°	0	
90°	0	

CBCP • Centerbeam candlepower

FC • Footcandles at beam center (aim point)

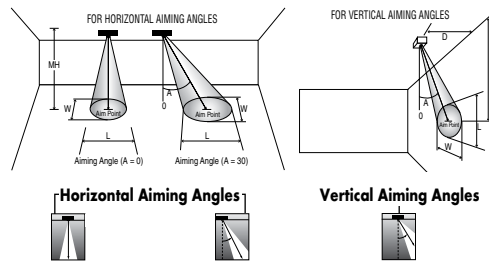In vertical aiming applications, aim point (X) is determined by dividing distance from the wall (D) by the tangent of the desired aim angle (A) (0.5774 for 30°, 1.0 for 45°).



FIXTURE	Beam Type	Beam Spread°	CBCP	0°				30°			30°				
				MH	FC	L	W	FC	L	W	D	FC	X	L	W
IC4AL (07LM) LED, 3500K Spot	SP	18° 	4589	4	287	1.3	1.3	186	1.7	1.5	2	143	3.5	2.7	1.3
				6	127	1.9	1.9	83	2.6	2.2	3	64	5.2	4.1	1.9
				8	72	2.5	2.5	47	3.4	2.9	4	36	6.9	5.5	2.5
				10	46	3.2	3.2	30	4.3	3.7	5	23	8.7	6.9	3.2
				12	32	3.8	3.8	21	5.1	4.4	6	16	10.4	8.2	3.8
IC4AL (07LM) LED, 3500K Narrow Flood	NFL	30° 	2637	4	165	2.1	2.1	107	2.9	2.5	2	82	3.5	5.5	2.1
				6	73	3.2	3.2	48	4.4	3.7	3	37	5.2	8.2	3.2
				8	41	4.3	4.3	27	5.9	5.0	4	21	6.9	10.9	4.3
				10	26	5.4	5.4	17	7.3	6.2	5	13	8.7	13.7	5.4
				12	18	6.4	6.4	12	8.8	7.4	6	9	10.4	16.4	6.4
IC4AL (07LM) LED, 3500K Flood	FL	40° 	1923	4	120	2.9	2.9	78	4.1	3.4	2	60	3.5	9.7	2.9
				6	53	4.4	4.4	35	6.1	5.0	3	27	5.2	14.5	4.4
				8	30	5.8	5.8	20	8.1	6.7	4	15	6.9	19.3	5.8
				10	19	7.3	7.3	12	10.2	8.4	5	10	8.7	24.2	7.3
				12	13	8.7	8.7	9	12.2	10.1	6	7	10.4	29.0	8.7

Multipliers:
27K - 0.93
30K - 0.96
35K - 1.00
40K - 1.03