

**JUNO**

Project: \_\_\_\_\_

Fixture Type: \_\_\_\_\_

Location: \_\_\_\_\_

Contact/Phone: \_\_\_\_\_

**5" BASICS SERIES™  
LED RETROFIT BAFFLE TRIM**DOWNLIGHT RETROFIT FOR STANDARD 5"  
RECESSED HOUSINGS**5RLD G3 07LM****PRODUCT DESCRIPTION**

Energy efficient LED retrofit module fits into standard 5" IC or non-IC recessed housings • Replaces 65W incandescent lamp, producing over 675 lumens • Dimmable with most standard incandescent, magnetic low voltage and electronic low voltage dimmers • LED retrofit module is designed to provide 50,000 hours of life • 5 year warranty

**PRODUCT SPECIFICATIONS**

**LED Downlight Retrofit Trim** Cast aluminum trim with white baffle and flange • All-in-one design where LED light engine mounts directly to trim for ease of installation into existing 5" recessed housings with medium base sockets • Provided with torsion springs.

**LED Light Engine** LEDs are mounted directly to cast aluminum housing providing superior thermal management to ensure long life • 2700K, 3000K, and 3500K LED color temperature • 90 CRI minimum • Accommodates 120 volts AC at 60Hz • Dimmable with most standard incandescent, magnetic low voltage and electronic low voltage dimmers • For a list of compatible dimmers, see [JUNORETROBASICS-DIM](#).

**Electrical Connections** Trim features quick connect plug installed as standard for installation into IC20 LEDT24 and IC20R LEDT24 housings with mating connector • Trim ships as standard with a medium base socket adapter whip for installation into 5" incandescent housings with medium base sockets • Product shipping to California does not include medium base socket adapter (L/SKTWHIP).

**Trim** Cast aluminum baffle trim with white finish • Diffusing lens conceals the LEDs from direct view and provides uniform aperture luminance.

**Life** Rated for 50,000 hours at 70% lumen maintenance.

**Labels** ENERGY STAR® Certified • Certified to the high efficacy requirements of California T24 • UL and cUL classified for use with most standard UL listed 5" recessed incandescent housings and Juno IC20 LEDT24 and IC20R LEDT24; see below for specific compatibility requirements • Damp location • Suitable for wet locations (indoor covered ceilings).

**Testing** All reports are based on published industry procedures; field performance may differ from laboratory performance.

Specifications subject to change without notice.

**INSTALLATION**

The LED retrofit baffle trim is provided with torsion springs as standard.

**COMPATIBLE HOUSINGS**

The 5RLD retrofit module is compatible with most 5" recessed housings measuring at least 4" high with an inside diameter between 5" and 5-3/4". Removal of the housing socket plate or socket mounting bracket may be required in order for the trim to fit properly.

**Compatible housings include, but not limited to:**

**Juno housings:** IC20, IC25 and TC20 Series

**Juno quick-connect LED housings:** [IC20 LEDT24](#) and [IC20R LEDT24](#)


**VuLite® housings:** V5IC and V5TC Series

**Lithonia® housings:** L5 Series

**Halo® housings:** H5 Series

**Thomas® housings:** PS5 and CR5 Series

**Capri® housings:** QL5 Series

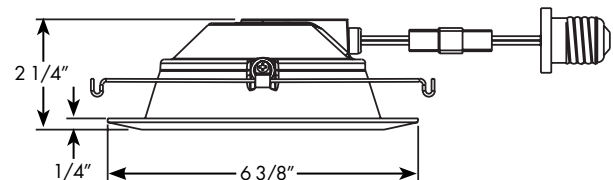**DIMENSIONS****PERFORMANCE DATA**

	27K	30K	35K
Input Voltage	120V	120V	120V
Input Power Typical	10W	10W	10W
Frequency	60Hz	60Hz	60Hz
EMI/RFI	FCC Title 47, Part 15 Class B (consumer)	FCC Title 47, Part 15 Class B (consumer)	FCC Title 47, Part 15 Class B (consumer)
Minimum starting temp	-30°C (-22°F)	-30°C (-22°F)	-30°C (-22°F)
CRI	90 min.	90 min.	90 min.
CCT	2700K	3000K	3500K

**ACCESSORIES**

Replacement E26 screw base adapter for installation into incandescent housings.

**LEDRETROWHIP** Unit Pack

**LEDRETROWHIP J10** Job pack 10 pcs

**LEDRETROWHIP J25** Job pack 25 pcs

# 5" BASICS SERIES™ LED RETROFIT BAFFLE TRIM

DOWNLIGHT RETROFIT FOR STANDARD 5"  
RECESSED HOUSINGS

## 5RLD G3 07LM

### ORDERING INFORMATION

Ordering Example: 5RLD G3 07LM 27K 90CRI 120 FRPC WWH

Trim Series	Generation	Lumens	Color Temperature	Color Rendering Index	Voltage
<b>5RLD</b> 5" Juno Basics Retrofit Downlight	<b>G3</b> Generation 3	<b>07LM</b> 700 Nominal Lumens	<b>27K</b> 2700K <b>30K</b> 3000K <b>35K</b> 3500K	<b>90CRI</b> 90+ CRI	<b>120</b> 120V

Driver	Finish	Options
<b>FRPC</b> Forward/Reverse Phase Cut	<b>WWH</b> White, White Trim Ring	<b>L/SKTWHIP</b> <sup>1</sup> Less Socket Whip (California Only) E26 screw base adapter not included

Notes:

<sup>1</sup> Required for shipments to California.

# 5" BASICS SERIES™ LED RETROFIT BAFFLE TRIM

DOWNLIGHT RETROFIT FOR STANDARD 5"  
RECESSED HOUSINGS  
**5RLD G3 07LM**

## PHOTOMETRICS


**Distribution Curve**

**Distribution Data**


**Coefficient of Utilization**

**Illuminance Data at 30" Above Floor for  
a Single Luminaire**

**5RLD G3 07LM 27K**, 2700K LEDs, input watts: 10, delivered lumens: 717, LM/W = 72, test no. PT10161401R, tested in accordance to IESNA LM-79.

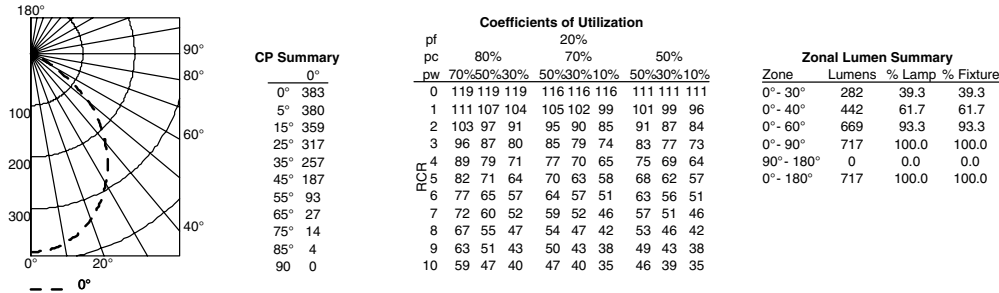

**5RLD G3 07LM 30K**, 3000K LEDs, input watts: 10, delivered lumens: 750, LM/W = 75, test no. PT10161401R, tested in accordance to IESNA LM-79.

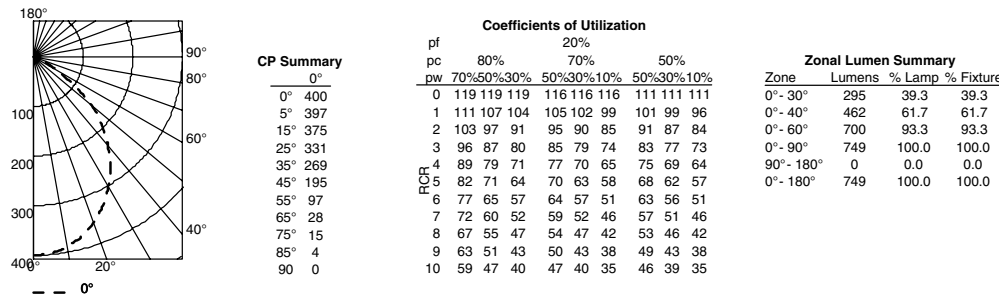

**5RLD G3 07LM 35K**, 3500K LEDs, input watts: 10, delivered lumens: 784, LM/W = 78, test no. PT10161401R, tested in accordance to IESNA LM-79.

